



Direct-Temp[®]

Direct Vent Catalog

FUEL TYPE: GAS | PELLET | MULTI-FUEL

US AND CANADA



TABLE OF CONTENTS

Features	3
Pellet & Gas Pipe & Accessories:	
Direct-Temp Pipe Lengths	5
Direct-Temp Elbows.....	6
Direct-Temp Supports	7
Direct-Temp Flashings and Collar	8
Direct-Temp Shields	9
Direct-Temp Adapters.....	10
Miscellaneous.....	11
Direct-Temp Accessories	11
Gas Accessories:	
Direct-Temp Termination Kits	12
Direct-Temp Termination Caps	13-15
Direct-Temp Adapters.....	16
Direct-Temp Accessories	17
Pellet Accessories:	
Pellet Vent Components.....	18-20
VP Pellet Termination Kits.....	22
UPP Pellet Termination Kits.....	23
Multi-Fuel System:	
Direct-Temp/Multi-Fuel (DT-M) Appliance Venting Solution	24
Features	25
Lengths	26
Elbows and Tees	27-28
Supports	28-29
Parts & Accessories	29-31
Outside the House Parts	32-33
Support Kits.....	34

DIRECT-TEMP

FEATURES




- 304 stainless steel welded seam inner flue
- LockTab® security
- Pipe rotates easily to align system components
- No sealant required
- High efficiency performance
- Siliconized fiberglass seal

WHAT MAKES THE DIRECT-TEMP® SYSTEM UNIQUE?

Chamfered edges allow for easy slide-together assembly.

Centering brackets are not welded or riveted in place, creating a more attractive outer jacket and a smooth profile. The free-floating inner liner allows the pipe to expand and contract under high temperature, without creating gaps or stress points in the system.

Our proprietary siliconized fiberglass seal adds an extra layer of protection to ensure combustion products won't leak out.

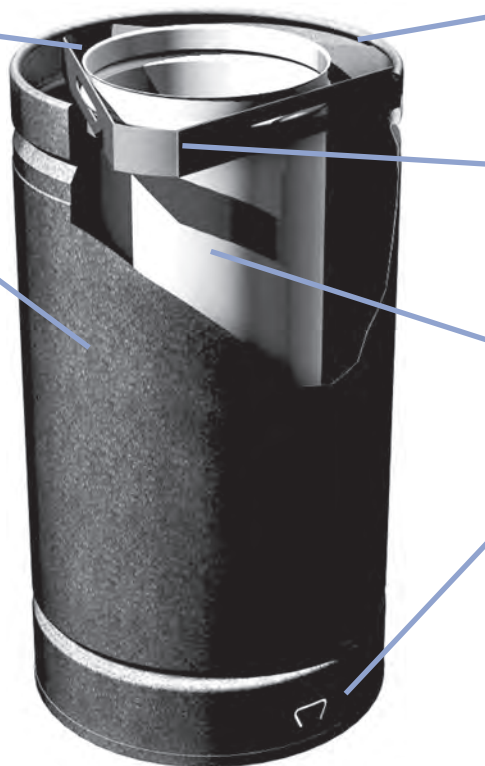

Outer walls are constructed of heavy duty galvanized steel and are available in powder coat black or unpainted versions.

Heavy duty centering brackets keep inner pipe centered for easy assembly. Brackets also allow the inner pipe to float, allowing for expansion and contraction.

The 304 stainless steel seam-welded inner pipe provides exceptional corrosion resistance and enhances overall system integrity.

Our LockTab® is a unique design that allows for 360° rotation while securely locking the sections of pipe together with just a push of the tab.



**ALL BACKED BY THE
BEST WARRANTY IN
THE BUSINESS.**

Pellet & Gas Pipe & Accessories



Direct-Temp Pipe Lengths

DIRECT-TEMP® PIPE LENGTH



- Available in lengths of 6", 9", 12", 18", 24", 36" and 48"
- Available in powder coat black or unpainted

Size	Description	Part #	(A) Lengths	Galvanized Sku #	Black Sku #	Net Installed Lengths
4 x 6 5/8	DT - 6" Pipe	4DT-06	6"	1604006	1604006B	4-3/8"
	DT - 9" Pipe	4DT-09	9"	1604009	1604009B	7-3/8"
	DT - 12" Pipe	4DT-12	12"	1604012	1604012B	10-3/8"
	DT - 18" Pipe	4DT-18	18"	1604018	1604018B	16-3/8"
	DT - 24" Pipe	4DT-24	24"	1604024	1604024B	22-3/8"
	DT - 36" Pipe	4DT-36	36"	1604036	1604036B	34-3/8"
	DT - 48" Pipe	4DT-48	48"	1604048	1604048B	46-3/8"
5 x 8	DT - 6" Pipe	5DT-06	6"	1605006	1605006B	4-3/8"
	DT - 9" Pipe	5DT-09	9"	1605009	1605009B	7-3/8"
	DT - 12" Pipe	5DT-12	12"	1605012	1605012B	10-3/8"
	DT - 18" Pipe	5DT-18	18"	1605018	1605018B	16-3/8"
	DT - 24" Pipe	5DT-24	24"	1605024	1605024B	22-3/8"
	DT - 36" Pipe	5DT-36	36"	1605036	1605036B	34-3/8"
	DT - 48" Pipe	5DT-48	48"	1605048	1605048B	46-3/8"

NOTE: Add (B) to end of Part # to specify black exterior when ordering.


TELESCOPIC LENGTH



- Telescopic lengths adjust 14"–22" on TL14 or 38"–70" on TL38
- Available in powder coat black or unpainted

Size	Description	Part #	Sku #
4 x 6 5/8	Telescopic Length 14-22" 4 x 6-5/8"	4DT-TL14	1604084
	Telescopic Length 14-22" 4 x 6-5/8" Black	4DT-TL14B	1604084B
	Telescopic Length 38-70" 4 x 6-5/8"	4DT-TL38	1604086
	Telescopic Length 38-70" 4 x 6-5/8" Black	4DT-TL38B	1604086B

Part #	DIM A	DIM B	DIM C
4DT-TL14	4"	6.625"	14-22"
4DT-TL38	4"	6.625"	38-70"

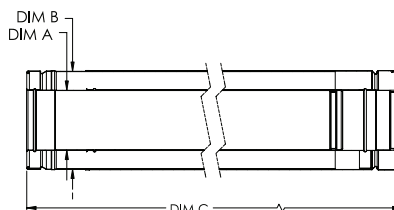

ADJUSTABLE LENGTH




- Adjustable length slides onto standard pipe section for adjustment from 4" to 10"
- Available in powder coat black or unpainted

Size	Description	Part #	Sku #
4 x 6 5/8	Adjustable Length 4-10" 4 x 6-5/8"	4DT-AJ12	1604082
	Adjustable Length 4-10" 4 x 6-5/8" Black	4DT-AJ12B	1604082B
5 x 8	Adjustable Length 4-10" 5 x 8"	5DT-AJ12	1605082
	Adjustable Length 4-10" 5 x 8" Black	5DT-AJ12B	1605082B

SIZE	DIM A
4 x 6-5/8"	12"
5 x 8"	12"

Direct-Temp Elbows

45° ELBOW




- 45° fixed elbow rotates at the joint connection to properly align installation
- Available in powder coat black or unpainted

Size	Description	Part #	SKU #
4 x 6^{5/8}	Elbow 4 x 6-5/8" 45 Degrees	4DT-EL45	1604215
	Elbow 4 x 6-5/8" 45 Degrees Black	4DT-EL45B	1604215B
5 x 8	Elbow 5 x 8" 45 Degrees	5DT-EL45	1605215
	Elbow 5 x 8" 45 Degrees Black	5DT-EL45B	1605215B

SIZE	DIM A	DIM B
4 x 6-5/8"	4.3"	4.3"
5 x 8"	5"	5"

90° ELBOW



- 90° fixed elbow rotates at the joint connection to properly align installation
- Available in powder coat black or unpainted

Size	Description	Part #	SKU #
4 x 6^{5/8}	Elbow 4 x 6-5/8" 90 Degrees	4DT-EL90S	1604230S
	Elbow 4 x 6-5/8" 90 Degrees Black	4DT-EL90SB	1604230SB
5 x 8	Elbow 5 x 8" 90 Degrees	5DT-EL90	1605230
	Elbow 5 x 8" 90 Degrees Black	5DT-EL90B	1605230B


SIZE	DIM A	DIM B
4 x 6-5/8"	6.5"	6.5"
5 x 8"	7.3"	7.3"

OFFSET CHART

Vent Length	4" x 6-5/8"		5" x 8"	
	Offset	Rise	Offset	Rise
Two 45's Only	4.125"	13.5"	5.875"	15.5"
6"	8"	16.125"	9"	19"
9"	10.25"	18.375"	11.25"	20.75"
12"	12.25"	20.375"	13.125"	23.125"
18"	17"	24.625"	17.375"	27.25"
24"	20.25"	29.25"	21.625"	31.5"
36"	29.25"	37.5"	30"	40"
48"	37.75"	46.875"	38"	48.625"


NOTE: There is +/- 1" tolerance in dimensions due to production variations.

Check with appliance manufacturer's installation instructions for permissible offset(s).

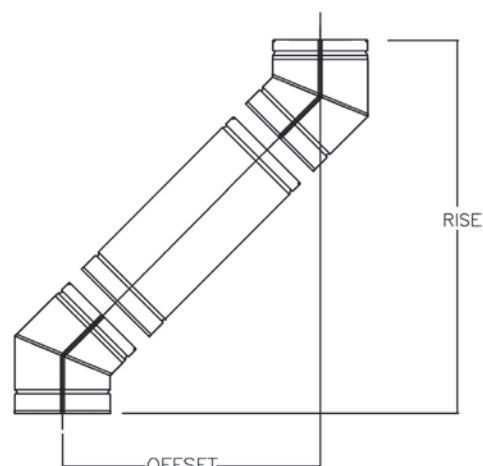

Direct-Temp Supports

CEILING SUPPORT

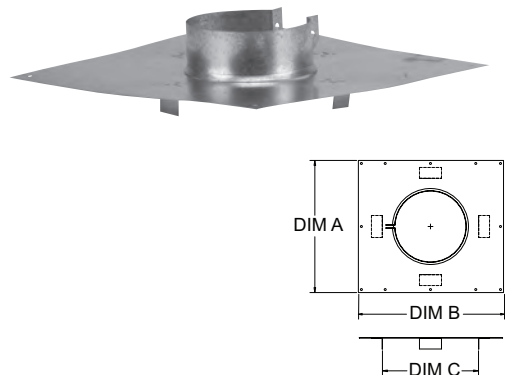


- Used as support on vertical applications when penetrating flat ceilings or floors
- Can support up to 40' of pipe

Size	Description	Part #	SKU #
4 x 6 5/8"	Ceiling Support 4 x 6-5/8"	4DT-CS	1604400
5 x 8"	Ceiling Support 5 x 8"	5DT-CS	1605400

SIZE	DIM A	DIM B	DIM C
4 x 6-5/8"	12"	12"	8.73"
5 x 8"	14"	14"	10.125"

WALL SUPPORT/BAND

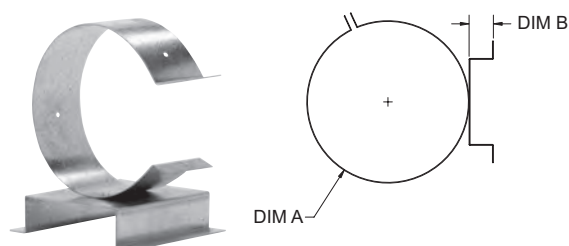


- Used as a support along the wall to provide stability and 1" clearance

Size	Description	Part #	SKU #
4 x 6 5/8"	Wall Support/Band 4 x 6-5/8"	4DT-WS/B	1604430
5 x 8"	Wall Support/Band 5 x 8"	5DT-WS/B	1605430

SIZE	DIM A	DIM B
4 x 6-5/8"	6.625"	1"
5 x 8"	8"	1"

CATHEDRAL CEILING SUPPORT BOX

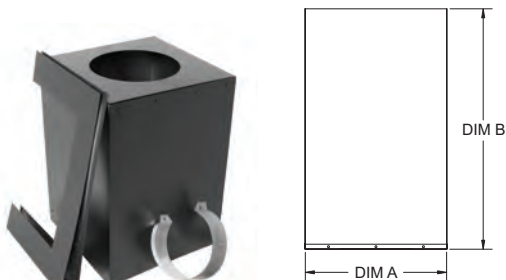

- Used to support Direct-Temp pipe when installing in a cathedral or pitched ceiling. CCS comes with Support Collar and Decorative two-piece Trim Plate
- Can support up to 40' of pipe

Size	Description	Part #	SKU #
4 x 6 5/8"	Cathedral Ceiling Spprt. Box 4 x 6-5/8" Blk.	4DT-CCS	1604424B
5 x 8"	Cathedral Ceiling Spprt. Box 5 x 8" Blk.	5DT-CCS	1605424B

SIZE	DIM A	DIM B
4 x 6-5/8"	10.625"	14"
5 x 8"	10.625"	14"

OFFSET SUPPORT




- Supports Direct-Temp pipe when using offsets or as a re-support on vertical runs that need additional support
- Use one Offset Support every 4'

Size	Description	Part #	SKU #
4 x 6 5/8"	Offset Support 4 x 6-5/8"	4DT-OS	1604435
5 x 8"	Offset Support 5 x 8"	5DT-OS	1605435

Direct-Temp Flashings and Collar

ADJUSTABLE ROOF FLASHING 0/12 TO 6/12

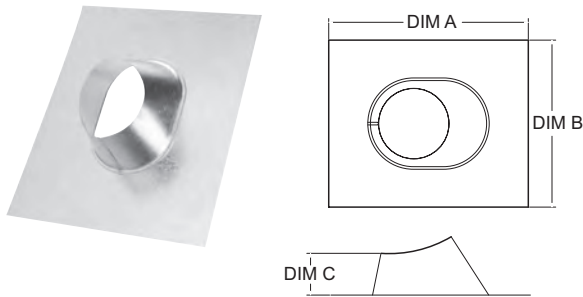


- Used to seal the opening where the Direct-Temp pipe penetrates the roof at 0/12 to 6/12 pitch

Size	Description	Part #	SKU #
4 x 6^{5/8}	0/12 - 6/12 4 x 6-5/8"	4DT-AF6	1604825
5 x 8	0/12 - 6/12 5 x 8"	5DT-AF6	1605825

SIZE	DIM A	DIM B	DIM C
4 x 6-5/8"	18"	15.25"	4"
5 x 8"	28.5"	24"	4"

ADJUSTABLE ROOF FLASHING 6/12 TO 12/12

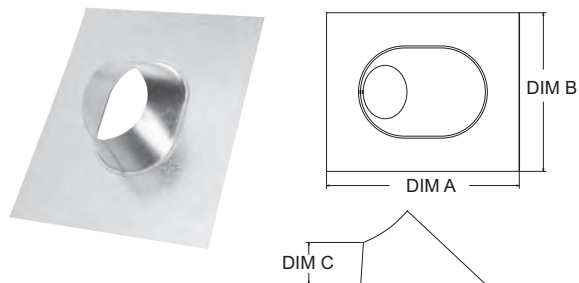


- Used to seal the opening where the Direct-Temp pipe penetrates the roof at 6/12 to 12/12 pitch

Size	Description	Part #	SKU #
4 x 6^{5/8}	6/12 - 12/12 4 x 6-5/8"	4DT-AF12	1604830
5 x 8	6/12 - 12/12 5 x 8"	5DT-AF12	1605830

SIZE	DIM A	DIM B	DIM C
4 x 6-5/8"	24.3"	20"	4"
5 x 8"	31.875"	27"	4"


RUBBER BOOT ROOF FLASHING

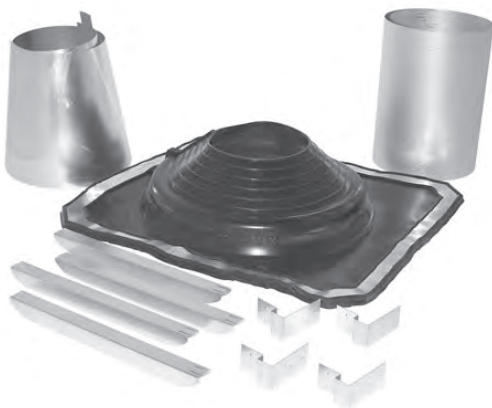

- Used for installations on corrugated roofs flat to 12/12 pitch to seal where Direct-Temp pipe penetrates the roof. Kit includes: rubber boot, shield assembly, spacer channels, mounting brackets, universal storm collar, mesh screen and hardware pack.

Size	Description	Part #	SKU #
4 x 6^{5/8}	Universal Rubber Boot Flashing Kit	URBAK	200275
5 x 8	Universal Rubber Boot Flashing Kit	URBAK	200275

STORM COLLAR

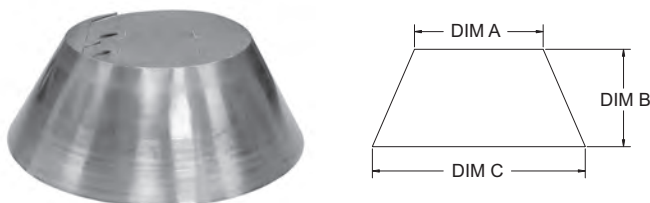


- Used with silicone sealant just above the roof flashing to provide a weather proof seal to the pipe

Size	Description	Part #	SKU #
4 x 6^{5/8}	Storm Collar 4 x 6-5/8"	4DT-SC	1604810
5 x 8	Storm Collar 5 x 8"	5DT-SC	1605810

SIZE	DIM A	DIM B	DIM C
4 x 6-5/8"	6.625"	5.5"	11"
5 x 8"	8"	5.5"	15"

Direct-Temp Shields


ADJUSTABLE ATTIC INSULATION SHIELD

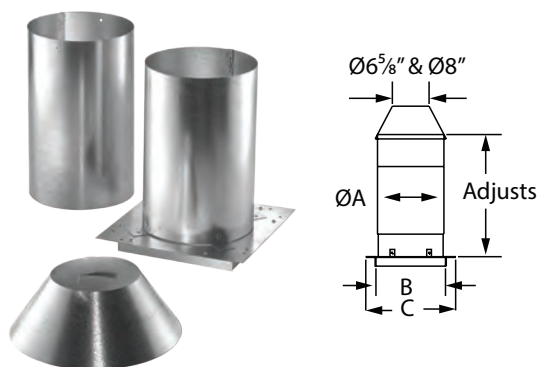

- Required for installations that pass through an attic to prevent insulation and debris from accumulating near the vent.
- Provides 1" clearance to combustibles.
- Includes base w/tube, extension tube and collar.
- Adjusts 12 13/16" to 20 13/16"

Size	A	B	C	Part #	Sk#	Pack
4" x 6 5/8"	8 13/16"	9"	11"	4DT-AAIS	1604491	1
5" x 8"	10 5/16"	11"	13"	5DT-AAIS	1605491	1

WALL THIMBLE

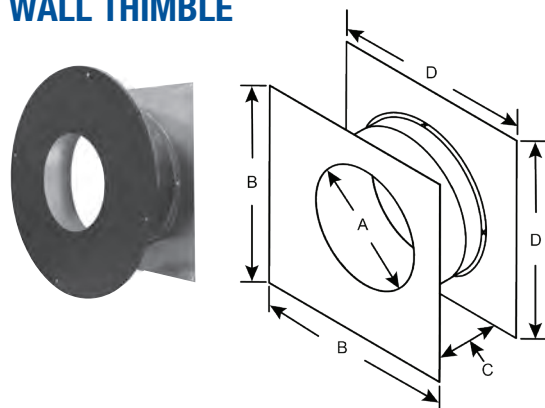


- Two-piece wall thimble easily slides together for installation on varying wall thicknesses. Serves a dual purpose as both a heat shield and firestop.
- Black Trim Plate available separately – Round or Square. See page 11.

Size	Description	Part #	Sk#
4 x 6 5/8"	Wall Thimble 4 x 6-5/8"	4DT-WT-1	1604461
5 x 8"	Wall Thimble 5 x 8"	5DT-WT-1	1605461

SIZE	DIM A	DIM B	MIN-MAX C	DIM D
4 x 6-5/8"	6.875"	9.125"	4.75" – 8.5"	13"
5 x 8"	8.25"	12.5"	6" – 11"	12.5"

FIRESTOP SPACER

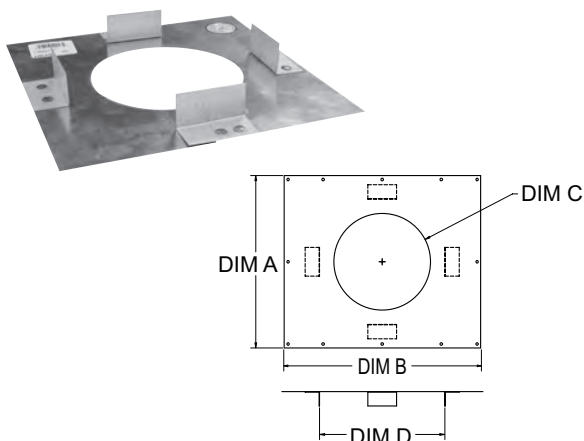

- Required when penetrating combustible materials. Refer to our installation instructions for specific requirements

Size	Description	Part #	Sk#
4 x 6 5/8"	Firestop Spacer 4 x 6-5/8"	4DT-FS	1604500
5 x 8"	Firestop Spacer 5 x 8"	5DT-FS	1605500

SIZE	DIM A	DIM B	DIM C	DIM D
4 x 6-5/8"	12"	12"	6.72"	8.73"
5 x 8"	14"	14"	8.125"	10.125"

APPLIANCE ADAPTER

- 4DT-AA Appliance Adapter can be used to ensure secure connection to twist-lock type appliance outlet collars



4DT-AA Appliance Adapter

4DT-AAV Vermont Castings Adapter


Size	Description	Part #	Sku #	Dim A
4 x 6 5/8	Appliance Adapter 4 x 6-5/8" Black	4DT-AA	1604245B	4"
	Vermont Castings Adapter 4 x 6-5/8" Black	4DT-AAV	1604246B	13-5/16"
	Appliance Adapter Universal/Napoleon 4 x 7" Black*	4DT-AA47(AAN)	1604247B	6"
5 x 8	Appliance Adapter 5 x 8"	5DT-AA	1605247	4"
	Napoleon Fireplace Adapter	5DT-AAN	1605247	5-3/8"

*For all direct vent appliances with 4" x 7" outlet, including Napoleon.

NOTE: - The Appliance Adapter is not required in every application.
- DIRECT-TEMP WILL SLIDE DIRECTLY ON TO MOST DIRECT VENT APPLIANCE OUTLETS

5 X 8 TO 4 X 6-5/8 REDUCER

- Our Direct-Temp® direct vent reducer allows you to adapt 5 x 8" Direct-Temp pipe diameter to the 4 x 6-5/8" pipe diameter for vertical run applications when permitted by appliance manufacturer

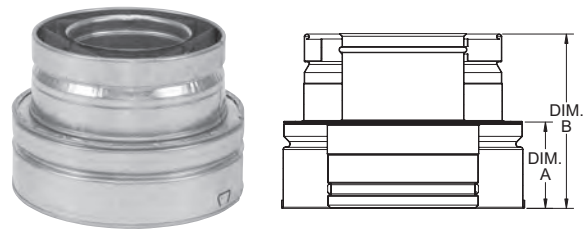

Size	Description	Part #	Sku #
5 x 8	5 x 8" to 4 x 6-5/8" DT Pipe Reducer	5DT-R4	1605364

SIZE	DIM A	DIM B
5 x 8"	2.88"	5.75"

DIRECT VENT TO DIRECT TEMP & DIRECT TEMP TO DIRECT VENT ADAPTERS

- Adapters to use 4" & 5" Selkirk Direct Temp with the 4" & 5" Amerivent Direct Vent product line
- Adapters to use 4" & 5" Amerivent Direct Temp with the 4" & 5" Selkirk Direct Vent product line



Description	Part #	Height
4" AMP DV to 4" SLK DT	1604280	6"
5" AMP DV to 5" SLK DT	1605280	6"
4" SLK DT to 4" AMP DV	1604281	6"
5" SLK DT to 5" AMP DV	1605281	6"

Miscellaneous

BLACK TOUCH-UP PAINT



- Forrest 1A54D206 is the recommended touch-up paint.

Part #

AVD-PTU

Direct-Temp Accessories

RESTRICTION DISK




- Use in accordance with appliance manufacturer's instructions only

Size	Description	Part #	Sku #
4 x 6 5/8"	Restriction Disk 4 x 6-5/8"	4DT-RD	1604285

SIZE	DIM A	DIM B
4 x 6-5/8"	5.25"	4.5"

ROUND TRIM PLATE

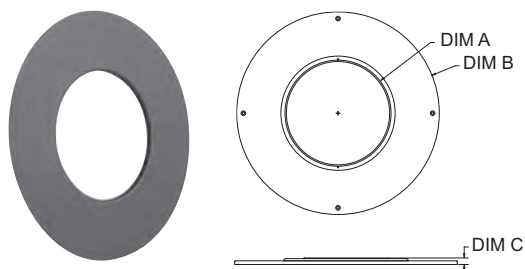


- Used to provide a finished look at the ceiling or wall for vertical or horizontal installations

Size	Description	Part #	Sku #
4 x 6 5/8"	Round Trim Plate 4 x 6-5/8" Black	4DT-TPR	1604502B
5 x 8"	Round Trim Plate 5 x 8" Black	5DT-TPR	1605502B

SIZE	DIM A	DIM B	DIM C
4 x 6-5/8"	6.875"	14"	.25"
5 x 8"	8.25"	19"	.312"

SQUARE TRIM PLATE

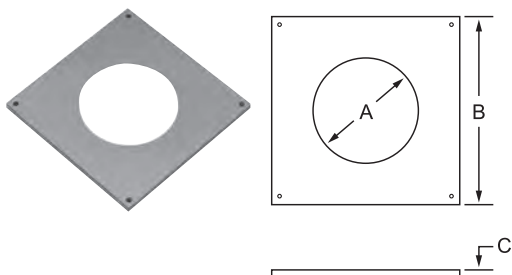


- Used to provide a finished look at the ceiling or wall for vertical or horizontal installations

Size	Description	Part #	Sku #
4 x 6 5/8"	Square Trim Plate Black	4DT-TPS	1604503B
5 x 8"	Square Trim Plate Black	5DT-TPS	1605503B

SIZE	DIM A	DIM B	DIM C
4 x 6-5/8"	6.875"	12"	.54"
5 x 8"	8.25"	14"	.54"

SUSI (SELKIRK UNIVERSAL SHIELDING INSULATION)

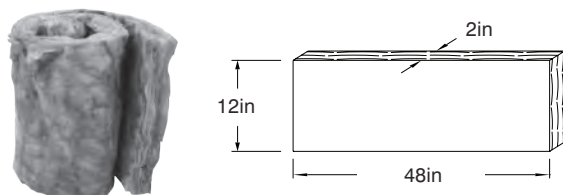


- Optional insulation for use with the Cathedral Ceiling Support Box, Attic Insulation Shield and Wall Thimble. The SUSI protects building materials against radiant heat from the vent and helps maintain temperatures within the vent system. The SUSI also reduces air infiltration into the dwelling.

Part #

SUSI 200001

Gas Accessories

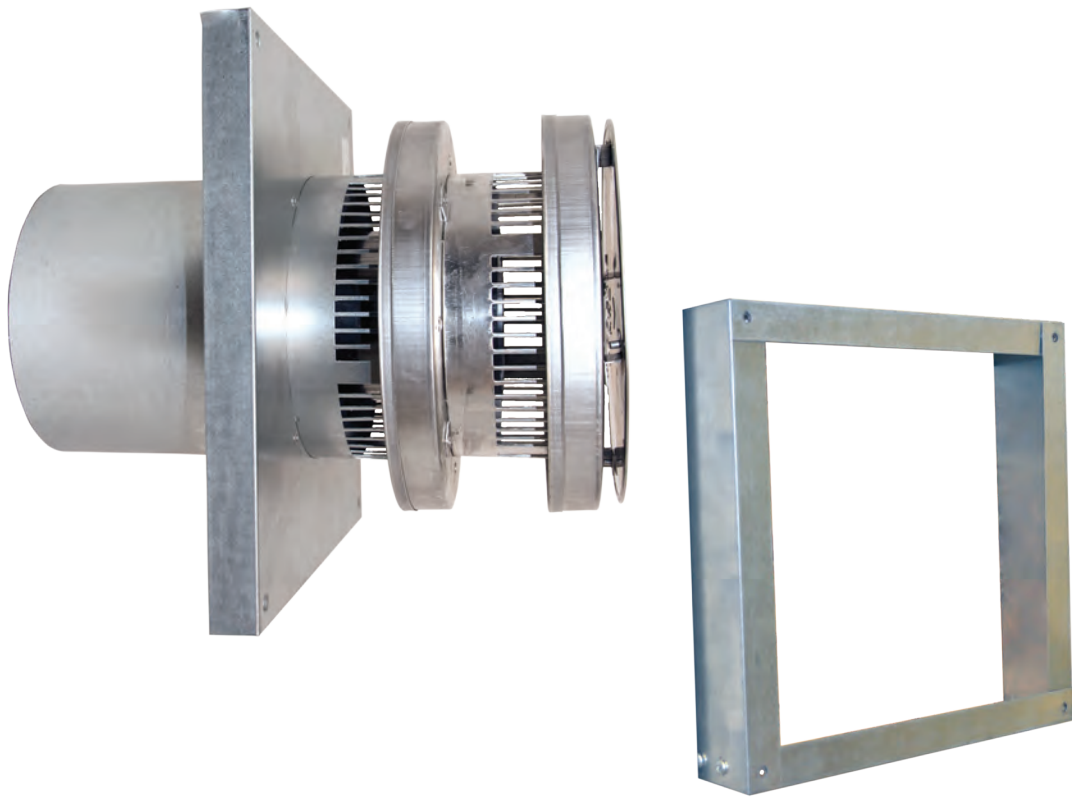


Direct-Temp Termination Kits

TERMINATION KITS


Horizontal Termination Kit "A" Includes:

90° Elbow, Wall Thimble, Horizontal Termination, Black Round Trim Plate, and Appliance Adapter

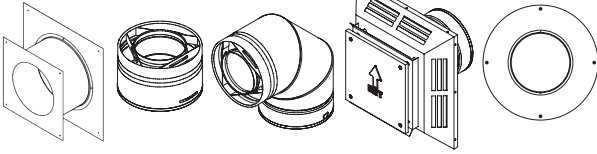


Vertical Termination Kit Includes:

Adjustable Flashing 0/12–6/12, Appliance Adapter, Storm Collar, and Vertical Termination



Horizontal Termination Kit "B" Includes:

90° Elbow, Wall Thimble, Horizontal Termination, Appliance Adapter, 24" Pipe, Black Round Trim Plate, and Adjustable Length Pipe (4"–10")

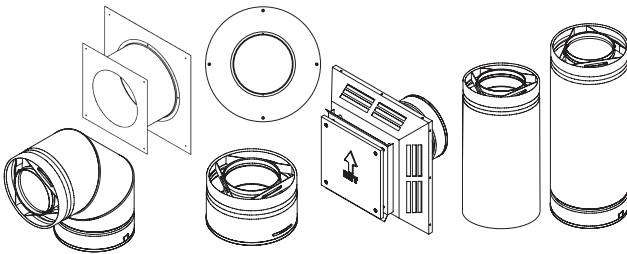

Size	Description	Part #	Sku #
4 x 6 5/8	Vertical Termination Kit	4DT-VKC	1604620
	Horizontal Termination Kit "A"	4DT-HKA	1604621
	Horizontal Termination Kit "B"	4DT-HKB	1604622



CHIMNEY CONVERSION KITS (USA ONLY)

Size	Description	Part #	Sku #
4 x 6 5/8	Masonry Chimney Conversion Kit	4DT-MCK	1604630
	CHIM. CONV. KIT A (for 6" ID / 8" OD Class A Chimney)	4DT-CCKA	1604631
	CHIM. CONV. KIT B (for 8" ID / 10" OD Class A Chimney)	4DT-CCKB	1604635



Masonry Chimney Conversion Kit
Connect to a masonry chimney using Selkirk aluminum Flexi-Liner (sold separately)



Chimney Conversion Kit
Connect to a 6" I.D. or 8" I.D. Class A chimney using Selkirk aluminum Flexi-Liner (sold separately)

Masonry Chimney Conversion Kit Includes:

Chimney Inlet Adapter, Chimney Outlet Adapter, and Flashing

Chimney Conversion Kit "A" Includes:

6" Chimney Inlet Connector, 6" Chimney Outlet Connector, and screw pack


Chimney Conversion Kit "B" Includes:

8" Chimney Inlet Connector, 8" Chimney Outlet Connector, and screw pack

Direct-Temp Termination Caps

VERTICAL TERMINATION

- Used as end cap for vertical applications only

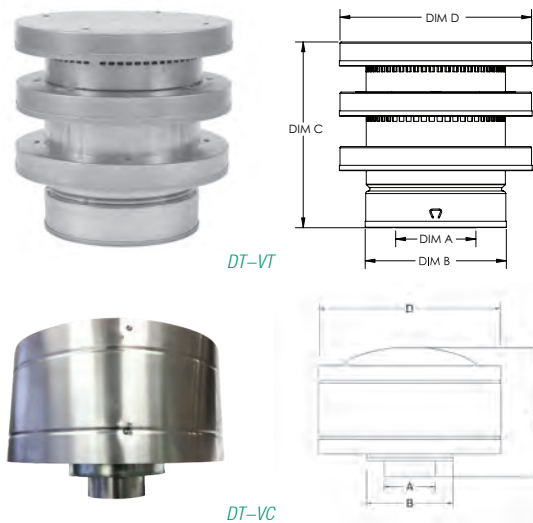

Size	Description	Part #	Sk#
4 x 6 5/8"	Vertical Termination 4 x 6-5/8"	4DT-VT	1604800
5 x 8"	Vertical Termination 5 x 8"	5DT-VT	1605800
4 x 6 5/8"	High Wind Vertical Cap 4 x 6-5/8"	4DT-VC	1604802
5 x 8"	High Wind Vertical Cap 5 x 8"	5DT-VC	1605802

DT-VT


SIZE	DIM A	DIM B	DIM C	DIM D
4 x 6-5/8"	4"	6.625"	9"	9 1/4"
5 x 8"	5"	8"	9 1/2"	11 1/4"

DT-VC

SIZE	DIM A	DIM B	DIM C	DIM D
4 x 6-5/8"	4"	6.625"	10"	12"
5 x 8"	5"	8"	10"	12"

ROUND HORIZONTAL CAP

- For horizontal venting applications
- Corrosion-resistant construction with stainless steel inner wall
- Low-restriction design improves efficiency and minimizes wall temperature

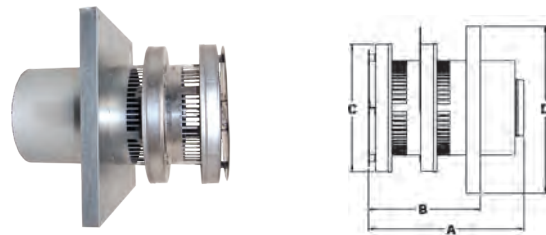

Size	Description	Part #	Sk#
4 x 6 5/8"	Round Horizontal Cap 4 x 6-5/8"	4DT-HCR	2003949
5 x 8"	Round Horizontal Cap 5 x 8"	5DT-HCR	2003950

SIZE	DIM A	DIM B	DIM C	DIM D
4 x 6-5/8"	11"	8"	9.125"	12"
5 x 8"	13"	8.5"	11"	17.25"

VINYL SIDING STANDOFF FOR ROUND HORIZONTAL CAP (BEFORE VINYL SIDING IS INSTALLED)


- Required for vinyl siding applications
- DT-VSK for use before vinyl siding is installed
- Assembly required
- Provides 3" extension from wall



Size	Description	Part #	Sk#
4 x 6 5/8"	Vinyl Siding Standoff - Before Installed	4DT-VSK	2003503
5 x 8"	Vinyl Siding Standoff - Before Installed	5DT-VSK	2003504

VINYL SIDING STANDOFF FOR ROUND HORIZONTAL CAP (AFTER VINYL SIDING IS INSTALLED)


- Required for vinyl siding applications
- DT-VSKB for use after vinyl siding is installed
- Assembly required
- Provides 3" extension from wall

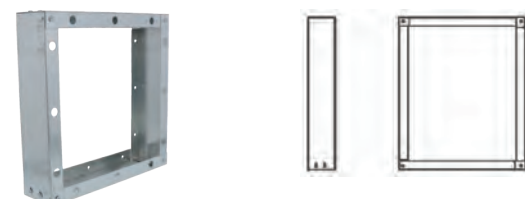

Size	Description	Part #	Sk#
4 x 6 5/8"	Vinyl Siding Standoff - After Installed	4DT-VSKB	2006469
5 x 8"	Vinyl Siding Standoff - After Installed	5DT-VSKB	2006470

Direct-Temp Termination Caps *continued*

ADJUSTABLE SQUARE HORIZONTAL CAP




- For horizontal venting applications
- New design provides installer an additional 5" of flexibility
- Now even simpler to connect the venting system to the termination
- No need to be exact in the length of your horizontal run
- Sleek, low profile design
- Supplied with insulation pad

Size	Description	Part #	SKU #
4 x 6 5/8	Horizontal Termination 4 x 6-5/8"	4DT-AHC	1604807
5 x 8	Horizontal Termination 5 x 8"	5DT-AHC	1605807

SIZE	DIM A	DIM B	DIM C
4 x 6.625"	13.5"	7"	8"
5 x 8"	16"	7"	8"

LOW PROFILE SIDING SHIELD – SQUARE TERMINATIONS




- DT-VS used with metal siding, brick or masonry finished surfaces

Size	Description	Part #	SKU #
4 x 6 5/8	Low Profile Siding Shield - Square	4DT-VS-1	1604811
5 x 8	Low Profile Siding Shield - Square	5DT-VS-1	1605811

SIZE	DIM A	DIM B	DIM C
4 x 6.625"	6.825"	17.4"	2"
5 x 8"	8.25"	19.8"	2"


VINYL SIDING STANDOFF FOR SQUARE HORIZONTAL CAP (BEFORE VINYL SIDING IS INSTALLED)



- Required for vinyl siding applications
- DT-VSS for use before vinyl siding is installed
- Assembly required
- Provides 3" extension from wall

Size	Description	Part #	SKU #
4 x 6 5/8	Square Vinyl Siding Standoffs - Before Installed	4DT-VSS	2004818
5 x 8	Square Vinyl Siding Standoffs - Before Installed	5DT-VSS	2004819

SQUARE VINYL SIDING STANDOFFS – AFTER VINYL SIDING INSTALLED (AFTER VINYL SIDING IS INSTALLED)




- Required for vinyl siding applications
- DT-VSSB for use after vinyl siding is installed
- Assembly required
- Provides 3" extension from wall

Size	Description	Part #	SKU #
4 x 6 5/8	Square Vinyl Siding Standoffs - After Installed	4DT-VSSB	2006471
5 x 8	Square Vinyl Siding Standoffs - After Installed	5DT-VSSB	2006472

Direct-Temp Termination Caps *continued*

SNORKEL TERMINATION

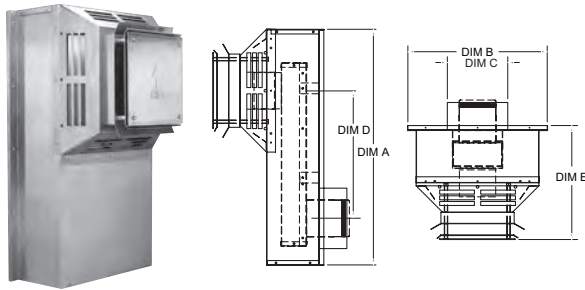

- Use when horizontal termination is too close to grade or additional height is needed

Size	Description	Part #	SKU #
4 x 6 5/8	14" Rise Snorkel Termination 4 x 6-5/8"	4DT-ST14	1604836
	36" Rise Snorkel Termination 4 x 6-5/8"	4DT-ST36	1604838
5 x 8	14" Rise Snorkel Termination 5 x 8"	5DT-ST14	1605836
	36" Rise Snorkel Termination 5 x 8"	5DT-ST36	1605838

4 x 6 5/8

SNORKEL SIZE	DIM A	DIM B	DIM C	DIM D	DIM E
14"	26"	15.25"	6.63"	14"	13.25"
36"	48"	15.25"	6.63"	36"	13.25"


5 x 8

SNORKEL SIZE	DIM A	DIM B	DIM C	DIM D	DIM E
14"	27.55"	17.81"	8.04"	14"	13.25"
36"	49.55"	17.81"	8.04"	36"	13.25"


Direct-Temp Adapters

CO-LINEARS – PARTS AND ADAPTERS

- Use with Selkirk 3" aluminum Flexi-Liner or equivalent.

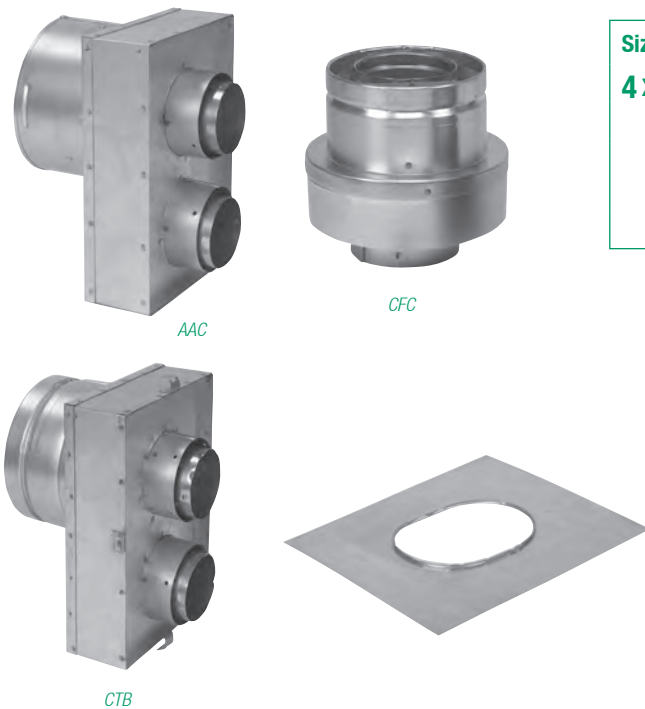


Size	Description	Part #	SKU #
4 x 6 5/8	Co-Linear Termination Box with Baseplate	4DT-CTB	1604650
	Co-Linear Appl. Adapter-Standard	4DT-AAC	1604655
	Co-Linear Appl. Adapter-Vermont Castings	4DT-AACV	1604656
	Co-Linear Appl. Adapter-Travis Industries	4DT-AACT	1604657
	Co-Linear Flex Connector	4DT-CFC	1604085

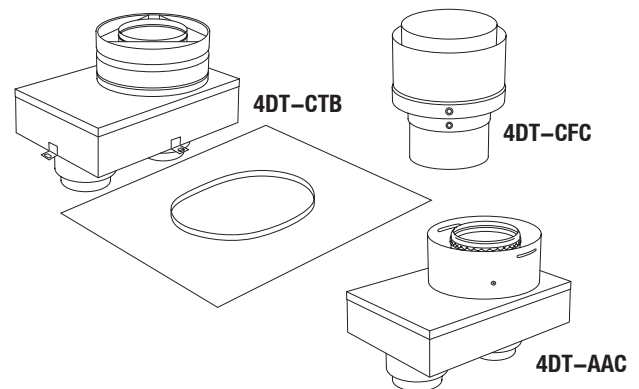

Direct-Temp Accessories



INTEGRATED CO-LINEAR CAP

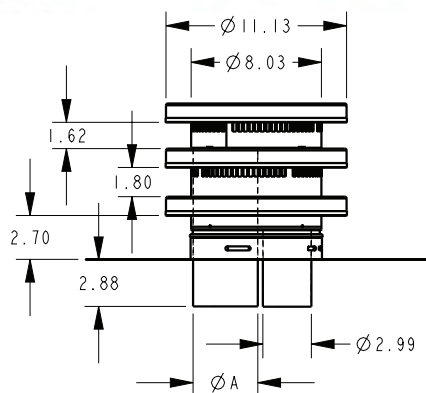

- No adapter required
- 16" x 16" flashing base
- Integrated air intake/exhaust connections

Size	Description	Part #	Skus #	Dim A
3 / 3	3" Co-linear Cap	4DT-CC33	1604643	3"
3 / 4	4" Co-linear Cap	4DT-CC43	1604644	4"

CO-LINEAR INSERT KITS



- Use when installing a direct vent co-linear gas insert into a masonry chimney
- Easy installation saves time and labor costs
- Kit Includes:
 - High Wind Termination Cap or Prairie Termination Cap with 18" x 18" base plate
 - Two 35 foot aluminum flexible liner lengths
 - Exhaust identified with red tape at both ends
 - Clamps & hardware pack

Size	Description	Part #	Skus #	Dim A
3 / 3	3"/3" 35' Aluminum Flex Length/High Wind Cap Kit	4DT-33IK35VB	1604633	3"
3 / 4	4"/3" 35' Aluminum Flex Length/High Wind Cap Kit	4DT-34IK35VB	1604634	4"
3 / 3	3"/3" 35' Aluminum Flex Length/Prairie Cap Kit	4DT-33IK35VBP	1604653	3"
3 / 4	4"/3" 35' Aluminum Flex Length/Prairie Cap Kit	4DT-34IK35VBP	1604654	4"

Note: Cap only available with the Co-Linear Insert Kit. Caps are not sold separately.

Pellet Accessories



PELLET VENT COMPONENTS

PELLET STOVE ADAPTERS




4DT-VPSA

Description	Part #	Sk#	A	B	C	D
VP Pellet Stove Adapter	4DT-VPSA	1604248	6.59"	6.125"	4.54"	2.75"
VP Pellet Stove Adapter Low Profile	4DT-VPSAL	1604249	6.59"	5.5"	4"	2.6" I.D.
UPP Pellet Stove Adapter	4UPP-DTA	824037	6.57"	7.75"	4.75"	N/A
UPP Pellet Stove Adapter-Black	4UPP-DTAB	824037B	6.57"	7.75"	4.75"	N/A
UPP Pellet Stove Adapter Low Profile	4DT-UPPSAL	1604840	9.25"	7"	4"	2.625"


NOTE: Allows pellet stove to connect to Direct Temp





4DT-UPPSAL

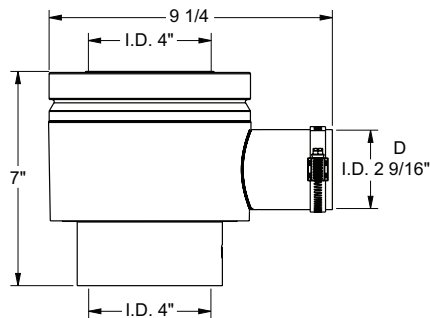

4UPP-DTA

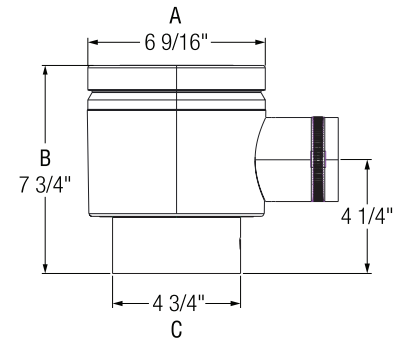

45° PELLET STOVE ADAPTER




Description	Part #	Sk#
VP Pellet Stove Adapter 45 Degree	4DT-VPSA45	1604250
UPP Pellet Stove Adapter 45 Degree	4DT-UPPSA45	1604841

NOTE: Allows pellet stove to connect to Direct Temp

- Includes 3 knock-out locations for flexibility when connecting stub for combustion air kit
- Used for appliances in corner installations

PELLET STOVE TERMINATION ADAPTER




Description	Part #	Sk#
Direct Vent Pellet Termination Adapter	4DT-VPTA	1604805

DIM A	DIM B	DIM C
4"	7"	6.67"

NOTE: Use in conjunction with horizontal Exit Cap (4VP-EC), Decorative Cone Cap (4DT-DCC) or Vertical Termination (4VP-VC)

45° HORIZONTAL TERMINATION ELBOW

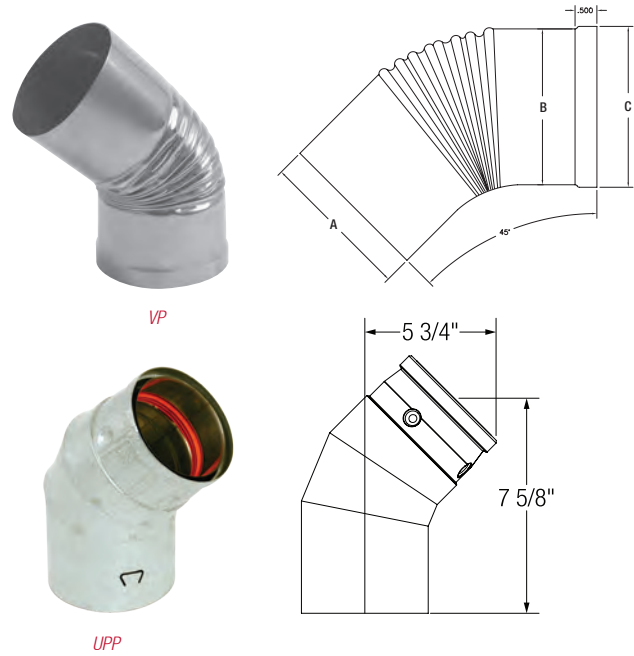

Description	Part #	Sku #
VP 45° Horizontal Termination Elbow*	4DT-VPTE	1604214
UPP 45° Horizontal Termination Elbow**	4UPP-45E	824008
UPP 45° Horizontal Termination Elbow Black**	4UPP-45EB	824008B

DIM A	DIM B	DIM C
3.915"	4.03"	4.16"

***NOTE:** Use in conjunction with Exit Cap (4VP-EC) or Decorative Cone Cap (4DT-DCC) to direct horizontal exhaust directionally

****NOTE:** Use in conjunction with Screen Cap (4UPP-45T)

DECORATIVE CONE CAP



Description	Part #	Sku #
VP Decorative Cone Cap	4DT-DCC	1604803

316 Stainless Steel

COMBUSTION AIR KIT

To direct combustion air from 4DT-VP5A to pellet stove incoming air inlet.




Description	Part #	Sku #
Combustion Air Kit	4DT-CAK	1604614

- KIT INCLUDES:**
- One hose clamp....adjusts from 1-1/2" to 3-1/2" to fit all pellet stoves
 - 3 feet of 3" ID aluminum flex pipe

OUTLET SCREEN

Attaches inside 4DT-DCC or 4VP-EC to prevent animals, birds and debris from entering horizontal vent.

Description	Part #	Sku #
VP Outlet Screen	4DT-VP0S	1604790




4DT-VP0S Outlet Screen installed

SPARK SCREEN

Attaches inside 4DT-DCC to reduce sparks and to prevent animals, birds and debris from entering. Easily removed for cleaning.

Description	Part #	Sku #
VP Spark Screen	4DT-VPSS	1604791

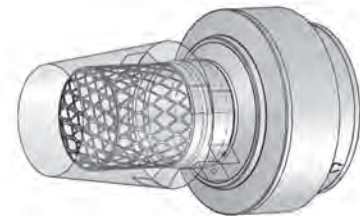


4DT-VPSS Spark Screen installed

VP PELLET TERMINATION KITS

VP Pellet Pipe common termination kits. Pipe lengths not included.

UP & OUT HORIZONTAL TERMINATION KIT*

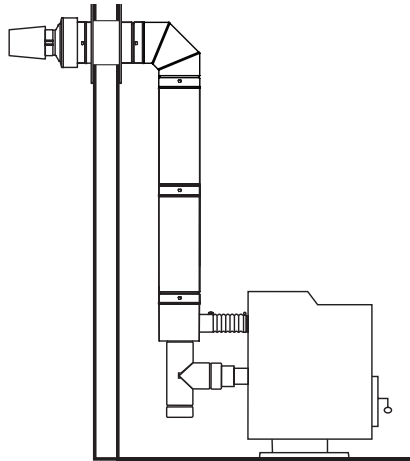

KIT INCLUDES:

- One 3" Pipe Connector, 3VP-PC
- One 3" to 4" Increaser, 3VP-I4
- One 4" Tee with Cap, 4VP-TS
- One Pellet Stove Adapter, 4DT-VP SA
- One Wall Thimble, 4DT-WT
- One 90° Elbow, 4DT-EL90SB
- One Pellet Stove Termination Adapter, 4DT-VP TA
- One Decorative Cone Cap, 4DT-DCC
- One Combustion Air Kit, 4DT-CAK
- One Black Round Trim Plate, 4DT-TPR

Description	Part #	Sk u #
Up and Out Horizontal Termination Kit*	4DT-VP HKB	1604680

**Kit includes everything but Direct-Temp pipe lengths.*

STRAIGHT OUT HORIZONTAL TERMINATION KIT*

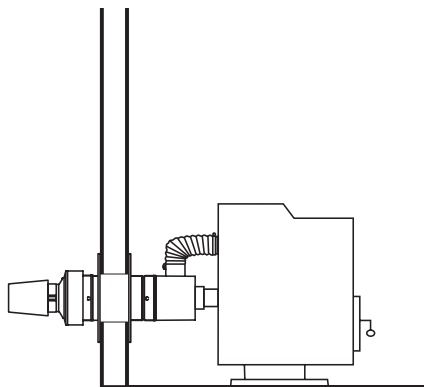

KIT INCLUDES:

- One 3" Pipe Connector, 3VP-PC
- One 3" to 4" Increaser, 3VP-I4
- One Pellet Stove Adapter, 4DT-VP SA
- One Wall Thimble, 4DT-WT
- One Pellet Stove Termination Adapter, 4DT-VP TA
- One Decorative Cone Cap, 4DT-DCC
- One Combustion Air Kit, 4DT-CAK
- One Black Round Trim Plate, 4DT-TPR

Description	Part #	Sk u #
Straight Out Horizontal Termination Kit*	4DT-VP HKA	1604682

**Kit includes everything but Direct-Temp pipe lengths.*

THROUGH-THE-ROOF VERTICAL TERMINATION KIT*

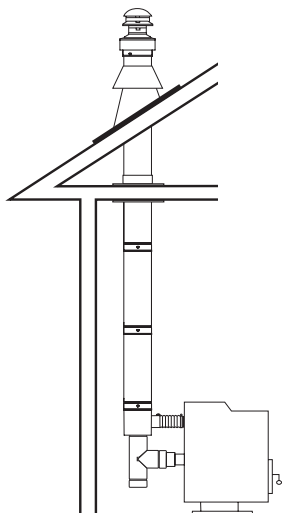
KIT INCLUDES:

- One 3" Pipe Connector, 3VP-PC
- One 3" to 4" Increaser, 3VP-I4
- One 4" Tee with Cap, 4VP-TS
- One Pellet Stove Adapter, 4DT-VP SA
- One Ceiling Support, 4DT-CS
- One Trim Plate, 4DT-TPR
- One Roof Flashing, 4DT-AF6
- One Storm Collar, 4DT-SC
- One Pellet Stove Termination Adapter, 4DT-VP TA
- One Vertical Cap, 4VP-VC
- One Combustion Air Kit, 4DT-CAK


Description	Part #	Sk u #
Through-the-Roof Vertical Termination Kit*	4DT-VP VK	1604681

**Kit includes everything but Direct-Temp pipe lengths.*

UPP PELLET TERMINATION KITS

Ultimate Pellet Pipe common termination kits. Pipe lengths not included.

UP & OUT HORIZONTAL TERMINATION KIT*

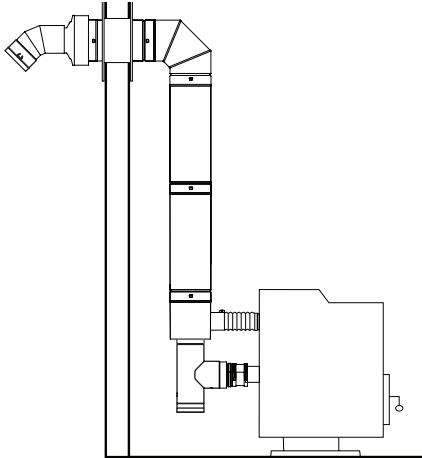


KIT INCLUDES:

- One 4UPP-DTA Pellet Adapter
- One 4DT-CAK Combustion Air Kit
- One 4DT-WT Wall Thimble
- One 4DT-VPTA –Termination Adapter
- One 4DT-EL90 – 90 Degree Elbow
- One 3UPP-ITB Increaser Tee and Cap (3" to 4")
- One 3UPP-AA – UPP Appliance Adapter (3")
- One 4UPP-45E – Pellet Elbow
- One 4UPP-45T – Pellet Horizontal Termination Screen
- One Black Round Trim Plate, 4DT-TPR

Description	Part #	SKU #
Up and Out Horizontal Termination Kit*	4DT-UPPHKB	824053

**Kit includes everything but Direct–Temp pipe lengths.*

STRAIGHT OUT HORIZONTAL TERMINATION KIT*

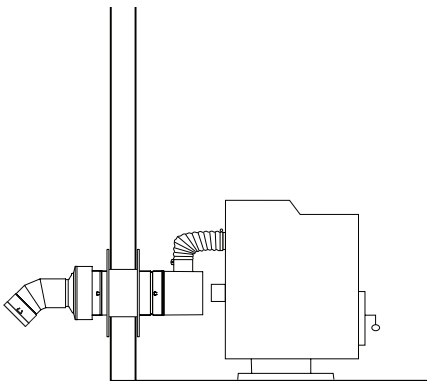


KIT INCLUDES:

- One 4DT-CAK Combustion Air Kit
- One 4DT-WT Wall Thimble
- One 4DT-VPTA Termination Adapter
- One 3UPP-I4 3-4" Increaser
- One 4UPP-DTA Direct Temp Adapter
- One 3UPP-AA Pellet Appliance Adapter
- One 4UPP-AA Pellet Appliance Adapter
- One 4UPP-45E – Pellet Elbow
- One 4UPP-45T – Pellet Horizontal Termination Screen
- One Black Round Trim Plate, 4DT-TPR

Description	Part #	SKU #
Straight Out Horizontal Termination Kit*	4DT-UPPHKA	824051

**Kit includes everything but Direct–Temp pipe lengths.*

THROUGH-THE-ROOF VERTICAL TERMINATION KIT*

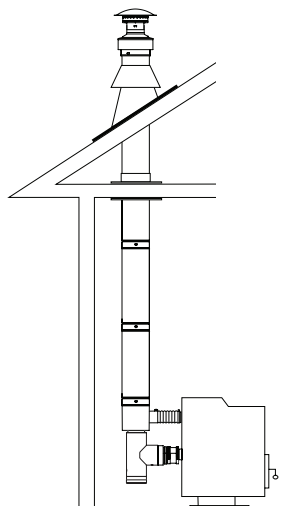

KIT INCLUDES:

- One 4UPP-DTA Pellet Adapter
- One 4DT-TPR Trim Plate
- One 4DT-CAK Combustion Air Kit
- One 4DT-SC Storm Collar
- One 4UPP-VC Vertical Termination Cap
- One 4DT-CS Ceiling Support
- One 4DT-VPTA Termination Adapter
- One 4DT-AF6 Adjustable Flashing (0/12 to 6/12)
- One 3UPP-AA UPP Appliance Adapter (3")
- One 3UPP-ITB Increaser Tee and Cap

Description	Part #	SKU #
Through-the-Roof Vertical Termination Kit*	4DT-UPPVK	824052

**Kit includes everything but Direct–Temp pipe lengths.*

Multi-Fuel System



Direct-Temp / Multi-Fuel (DT-M) Appliance Venting Solution

Direct-Temp / Multi-Fuel (DT-M) is a unique venting system designed to address the problem of highly corrosive flue gases produced by burning corn or other bio-fuels.

- Converts any conventional corn-burning or multi-fuel stove into a Direct Vent system.
- DT-M 3 x 5 and 4 x 7 systems easily connect to 3" or 4" flue outlets.
- Strong positive seal that's able to handle both positive and negative pressure direct venting applications.
- Laser-welded, double-wall system made from the toughest alloys.
- Concentric design eliminates the need for two separate penetrations.

Bio-Fuel Alternatives


- | | | |
|----------------|------------------------|-----------------------|
| • Corn | • Olive pits | • Processed silage |
| • Hulled wheat | • Cherry pits | • Grass Pellets |
| • Soy beans | • Bio-mass fuel grains | • Waste paper pellets |

Direct-Temp / Multi-Fuel (DT-M) Specifications


- Inner liner constructed of 29-4C Stainless Steel with built-in seal
- Outer jacket constructed of 409 Stainless Steel
- 1" clearance to combustibles
- Available in 3" and 4" diameters
- "Smart Choice" Lifetime Warranty

Typical Installations


Through-The-Roof Installation

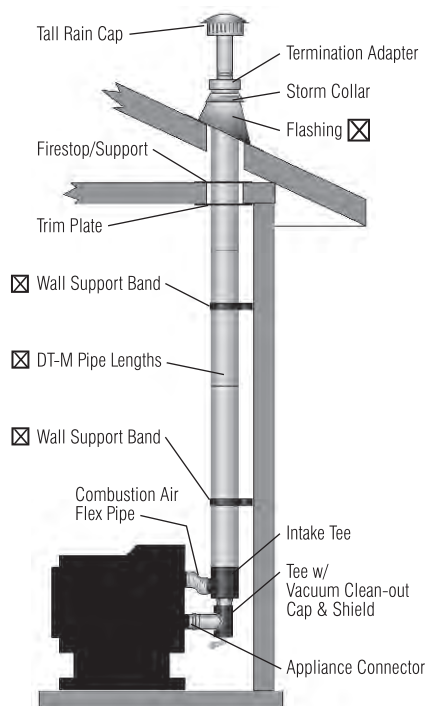

Up & Out Installation

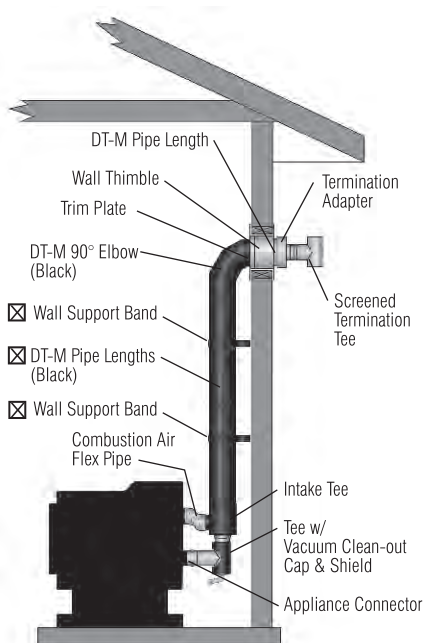

Straight Out Installation

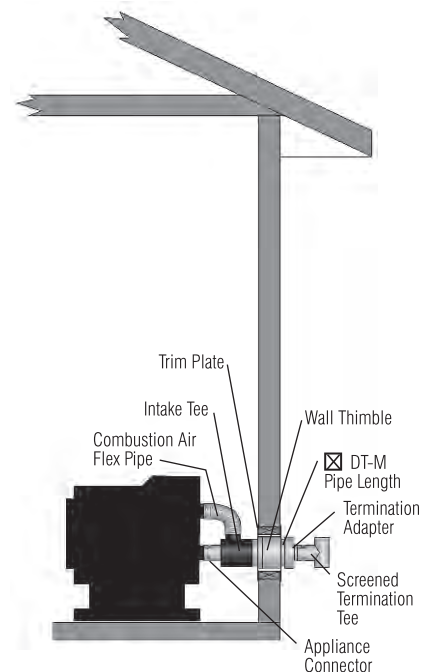


☒ = Items NOT included in Kits

Lengths

Straight Lengths

- Available in 6", 12", 24" and 36" lengths
- Available in 409 SS or black

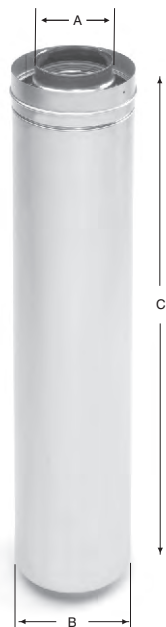

Size	Length	Dimensions			Installed Length	Part #	Part # (Black)
		A	B	C			
3" x 5"	6"	3"	5"	3.88"		SC03L6	SC03L6B
4" x 7"	6"	4"	7"	3.88"		SC04L6	SC04L6B

Size	Length	Dimensions			Installed Length	Part #	Part # (Black)
		A	B	C			
3" x 5"	12"	3"	5"	9.88"		SC03L12	SC03L12B
4" x 7"	12"	4"	7"	9.88"		SC04L12	SC04L12B

Size	Length	Dimensions			Installed Length	Part #	Part # (Black)
		A	B	C			
3" x 5"	24"	3"	5"	21.88"		SC03L24	SC03L24B
4" x 7"	24"	4"	7"	21.88"		SC04L24	SC04L24B

Size	Length	Dimensions			Installed Length	Part #	Part # (Black)
		A	B	C			
3" x 5"	36"	3"	5"	35.38"		SC03L36	SC03L36B
4" x 7"	36"	4"	7"	35.38"		SC04L36	SC04L36B

Adjustable Lengths



- Used to adjust pipe to a non-standard length
- Adjustable from 12.5" to 19.5"
- Available in 409 SS or black

Size	Length	Dimensions			Installed Length	Part #	Part # (Black)
		A	B	C			
3" x 5"	12.5" to 19.5"	3"	5"	12.5" to 19.5"		SC03AJ	SC03AJB
4" x 7"	12.5" to 19.5"	4"	7"	12.5" to 19.5"		SC04AJ	SC04AJB

Direct-Temp® Multi-Fuel Appliance Venting Solution

Elbows and Tees


45° Elbow



- Used to achieve offsets or changes in the direction of the vent system
- Degree of these welded seam elbows is not adjustable
- Available in 409 SS or black

Size	Dimensions				Part #	Part # (Black)
	A	B	C	D		
3" x 5"	3"	5"	3.1"	3.7"	SC03E45	SC03E45B
4" x 7"	4"	7"	3.3"	4.3"	SC04E45	SC04E45B


90° Elbow



- Used to achieve offsets or changes in the direction of the vent system
- Degree of these welded seam elbows is not adjustable
- Available in 409 SS or black

Size	Dimensions				Part #	Part # (Black)
	A	B	C	D		
3" x 5"	3"	5"	6.1"	7.0"	SC03E90	SC03E90B
4" x 7"	4"	7"	6.8"	7.75"	SC04E90	SC04E90B

Air Intake Tee

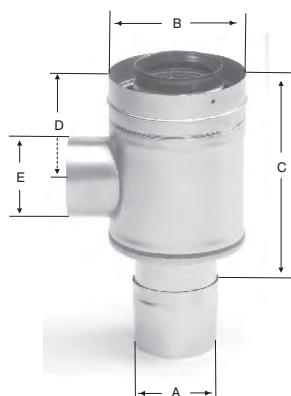


- Allows outside combustion air to be directed to the pellet stove and vents the flue gases to the outside
- Can be installed horizontally or vertically when connected to a Tee with Cleanout
- Available in 409 SS or black

Size	Dimensions					Part #	Part # (Black)
	A	B	C	D	E		
3" x 5"	3"	5"	9"	4.0"	3"	SC03TAD3	SC03TAD3B
4" x 7"	4"	7"	10"	4.6"	3"	SC04TAD3	SC04TAD3B

Direct-Temp® Multi-Fuel Appliance Venting Solution

Elbows and Tees

Tee w/Vacuum Cleanout Cap & Shield




- Used to change the orientation of the vent from horizontal to vertical
- Allows any ash to be removed via a vacuum

Size	Dimensions				Part #	Part # (Black)
	A	B	C	D		
3" x 5"	3"	3.5"	3"	6.3"	N/A	9316DTMB
3" to 4"	4"	4.5"	3"	6.3"	N/A	9416DTM3B
4" x 7"	4"	4.5"	4"	7.3"	N/A	9416DTMB

Supports


304 Support Clamps



- Used with horizontal systems to provide support at the required 6-foot intervals
- Support clamps by themselves do not maintain the necessary clearances to combustible materials: be sure to consider clearances when planning the system
- Support clamps are sold in pairs to clamp around the vent and suspend from single rod or cable, or used singularly as a saddle to rest the vent in

Size	Dimensions		Part #	Part # (Black)
	A			
3" DT-M	5"		4527SS	N/A
4" DT-M	7"		4727SS	N/A

1" Clearance Support Clamps




- Provides support to the DT-M system and establishes the required 1" clearance to combustible materials
- Secured in place via worm gear clamps

Size	Dimensions		Part #	Part # (Black)
	A			
3" DT-M	5"		SC03SUP1	N/A
4" DT-M	7"		SC04SUP1	N/A

Direct-Temp® Multi-Fuel Appliance Venting Solution

Supports


Vertical Support Leg



- Used to provide vertical support
- 20 gauge stainless steel support legs can be used below or above the roof

Size	Dimensions	Part #	Part # (Black)
	A		
3" DT-M	5"	SC03VSL	N/A
4" DT-M	7"	SC04VSL	N/A

1" Clearance Wall Support Band




- Provides vertical or horizontal support for the DT-M system
- Provides the required minimum clearance to combustibles
- Painted black for use in locations where it will be visible

Size	Dimensions	Part #	Part # black
	A		
3" DT-M	5"	N/A	SC03WB
4" DT-M	7"	N/A	SC04WB

Parts & Accessories

Appliance Connector - Inside Fit



- Inlet end connects to the appliance and the outlet connects to the Pellet Stove Adapter or to the Tee if venting vertically

Size	Dimensions			Part #	Part # (Black)
	A	B	C		
3"	2.9"	3"	4"	9363	N/A
3" to 4"	2.9"	4"	5.3"	9364	N/A
4"	3.9"	4"	4"	9464	N/A

Direct-Temp® Multi-Fuel Appliance Venting Solution

Parts & Accessories

Appliance Connector - Outside Fit



- Inlet end connects to the appliance and the outlet connects to the Pellet Stove Adapter or to the Tee if venting vertically

Size	Dimensions			Part #	Part # (Black)
	A	B	C		
3"	3.06"	3"	2-7/8"	9301MOD	N/A


Bixby Appliance Adapter



- Provides for a direct connection between a Bixby Appliance and 3" x 5" DT-M product

Size	Dimensions		Part #	Part # (Black)
	A			
3" x 5"	4"		N/A	SC03AD08


Firestop / Support / Wall Plate



- Required any time the DT-M vent penetrates a combustible ceiling or wall
- Spacers maintain the mandatory 1" air space clearance
- Can be used as a firestop or support in vertical or horizontal applications
- Serves as a support when DT-M Vent is secured to tabs in plate

Size	Dimensions		Part #	Part # (Black)
	A	B		
3" DT-M	5.06"	9"	SC03AFSP	N/A
4" DT-M	7.06"	11"	SC04AFSP	N/A

Trim Plate




- Used to provide a finished look at the ceiling for vertical installations
- Painted black

Size	Dimensions		Part #	Part # (Black)
	A	B		
3" DT-M	5.13"	12"	N/A	SC03TP
4" DT-M	7.13"	14"	N/A	SC04TP

Direct-Temp® Multi-Fuel Appliance Venting Solution

Parts & Accessories

Wall Thimble




- Used when the vent pipe passes through a wall

Size	Dimensions			Part #	Part # (Black)
	A	B	C		
3" DT-M	5.06"	9"	4.5" to 7"	SC03WT	N/A
4" DT-M	7.06"	11"	4.5" to 7"	SC04WT	N/A

NOTE: add SUSI to this part for increased performance and safety


SUSI - Selkirk Universal Shielding Insulation

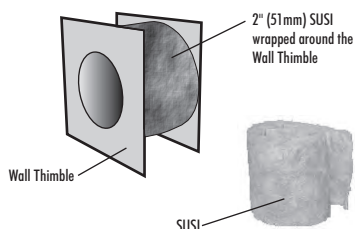

- Insulation used with Wall Thimble for increased performance and safety

Size	Dimensions	Part #	Part # (Black)
Universal	2" x 12" x 48"	SUSI	N/A


Roof Flashings



- Used to seal the opening where the pipe penetrates the roof
- Must be installed with a Storm Collar (ordered separately)

Size	Dimensions				Roof Pitch	Part #	Part # (Black)
	A	B	C	D			
3" DT-M	5.5"	7.5"	12.5"	6.0"	Flat to 2/12 Pitch	SC03TCF	N/A
3" DT-M	5.5"	7.5"	12.5"	6.0"	2/12 to 6/12 Pitch	SC03TCFA	N/A
3" DT-M	5.5"	7.5"	12.5"	6.0"	6/12 to 12/12 Pitch	SC03TCFB	N/A
4" DT-M	7.5"	9.5"	14.5"	6.0"	Flat to 2/12 Pitch	SC04TCF	N/A
4" DT-M	7.5"	9.5"	14.5"	6.0"	2/12 to 6/12 Pitch	SC04TCFA	N/A
4" DT-M	7.5"	9.5"	14.5"	6.0"	6/12 to 12/12 Pitch	SC04TCFB	N/A

304 Storm Collar



- Used to provide a weather proof seal to pipe above roof flashing
- Tighten and apply silicone sealant to upper edge
- Made from Type 304 Stainless Steel

Size	Dimensions	Part #	Part # (Black)
	A		
3" DT-M	5"	4526SS	N/A
4" DT-M	7"	4726SS	N/A

Direct-Temp® Multi-Fuel Appliance Venting Solution

Outside the House Parts


4DT-CAK Combustion Air Kit



- Provides an avenue for combustion air to flow from the Pellet Stove Adapter to the combustion air inlet of the appliance
- Includes 36" length of Aluminum Flex and Hose Clamp

Size	Length	Part #	Part # (Black)
3"	3'	4DT-CAK	N/A


Tall Rain Cap

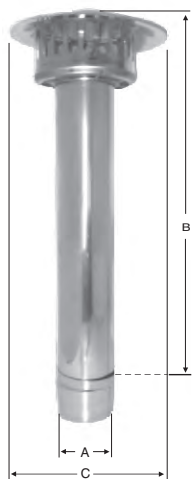

- Used as a termination for vertical systems
- Prevents rain water from entering the vent
- 29-4C construction
- Extension prevents flue gases from entering/ contaminating the intake air

Size	Dimensions			Part #	Part # (Black)
	A	B	C		
3" DT-M	3"	17.5"	5"	SC03RCX	N/A
4" DT-M	4"	18.3"	7"	SC04RCX	N/A

Termination Adapter




- Attaches to the last length of pipe in a vertical run
- Complete installation with a termination raincap
- Extra housing provides passage way for intake air

Size	Dimensions				Part #	Part # (Black)
	A	B	C	D		
3" DT-M	3"	5"	3.8"	7.1"	SC03VT	N/A
4" DT-M	4"	7"	3.8"	9.1"	SC04VT	N/A

Direct-Temp® Multi-Fuel Appliance Venting Solution

Outside the House Parts


Free Flow Horizontal Termination Cap



- Used as a termination on horizontal systems

Size	Dimensions		Part #	Part # (Black)
	A	B		
3" DT-M	3"	6.25"	9390FFHT	N/A
4" DT-M	4"	7.25"	9490FFHT	N/A


Screened Termination Tee



- Used as a termination on horizontal or vertical systems

Size	Dimensions			Part #	Part # black
	A	B	C		
3" DT-M	3"	5.5"	6"	9390TEE	N/A
4" DT-M	4"	6.0"	7"	9490TEE	N/A

45° Screened Termination Elbow



- Used as a termination on horizontal or vertical systems

Size	Dimensions				Part #	Part # (Black)
	A	B	C	D		
3" DT-M	3"	3.8"	5.3"	6.8"	9311TERM	N/A
4" DT-M	4"	5.3"	6"	8.0"	9411TERM	N/A

90° Screened Termination Elbow



- Used to terminate a horizontal system
- Directs the exhaust down

Size	Dimensions		Part #	Part # (Black)
	A			
3" DT-M	3"		9314TERM	N/A
4" DT-M	4"		9414TERM	N/A

Direct-Temp® Multi-Fuel Appliance Venting Solution

Support Kits

Selkirk has put together 3 DT-M kits to get your project done . . .

We have taken the guess work out of installation by putting the most common parts for each installation all in one box. These 3 kits depict the most common installations. Simply decide which of these scenarios fits your need, then pick up your Direct-Temp lengths and if required the proper roof flashing

Vertical Kit

When your chimney goes up through a ceiling, then thru the roof, you'll need the VERTICAL KIT - *DTM-VK which includes:

- Tee with Vacuum Cleanout Cap & Shield
- Air Intake Tee - Black
- Firestop/Support
- Trim Plate
- Appliance Adapter
- 304 Storm Collar
- Termination Adapter
- Tall Rain Cap
- Combustion Air Kit

SIZE


3"
4"

PRODUCT CODE

3DTM-VK
4DTM-VK

Now just add:

DT-M Lengths available in 6", 12", 24" and 36" lengths
and the appropriate **Roof Flashing**
Flat - 2/12
2/12 - 6/12
6/12 - 12/12

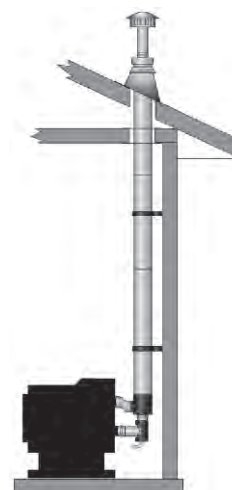

Up & Out Kit

When your chimney goes up and then out the wall you'll need the Up & Out KIT - *DTM-UK which includes:

- Tee with Vacuum Cleanout Cap & Shield
- Air Intake Tee - Black
- 90° Elbow - Black
- Trim Plate
- Wall Thimble
- (1) Wall Band/Support
- Appliance Adapter
- Termination Adapter
- Screened Termination Tee
- Combustion Air Kit

SIZE

4"

PRODUCT CODE

4DTM-UK

Now just add:

DT-M Lengths available in 6", 12", 24" and 36" lengths



Horizontal Kit

When your chimney goes straight out the wall you'll need the HORIZONTAL KIT - *DTM-HK which includes:

- Air Intake Tee - Black
- Trim Plate
- Wall Thimble
- Appliance Adapter
- Termination Adapter
- Screened Termination Tee
- Combustion Air Kit

SIZE

3"
4"

PRODUCT CODE

3DTM-HK
4DTM-HK

Now just add:

DT-M Lengths available in 6", 12", 24" and 36" lengths





BUILD FOR THE FUTURE

Our Portfolio of Brands

Airmate	www.airmate.com
Ameriflow	www.ameriflowregisters.com
Amerivent.....	www.ameri-vent.com
AMPCO.....	www.ampcostacks.com
Builder's Best	www.buildersbest.com
Duravent	www.duravent.com
Hart & Cooley	www.hartandcooley.com
Heatfab	www.heatfab.com
Lima.....	www.limaregister.com
Milcor	www.milcorinc.com
Portals Plus.....	www.portalsplus.com
RPS.....	www.rpscurbs.com
Security Chimneys.....	www.securitychimneys.com
Selkirk.....	www.selkirkcorp.com

Corporate Headquarters

Duravent Group
28 W. Adams, Suite 1810
Detroit, MI 48226
Tel: 800.835.4429
Email: info@duraventgroup.com
www.duraventgroup.com

Contact Us

For more information about our products or to contact us directly, please go to any of our websites and click on the Contact section on the website.

 AMERIVENT®

 SELKIRK®

duravent[™]
GROUP

BUILD FOR THE FUTURE

www.duraventgroup.com



For warranty information:
Scan this QR code or visit
www.duraventgroup.com/warranties