



SUPERPRO[®]

Chimney Catalog

FUEL TYPE: GAS | OIL

CANADA ONLY




| | |
|--------------------------------------|-------|
| Typical Installation | 3 |
| Technical Data Sheet | 4 |
| Stainless Steel Chimney lengths..... | 5 |
| Adjustable Chimney Lengths | 6 |
| Stainless Steel Elbows | 7-8 |
| Tee Components | 9 |
| Supports | 10-11 |
| Shields..... | 12 |
| Flashings and Storm Collars | 13-14 |
| Premium Rain Caps | 15 |
| Parts and Accessories | 16-17 |
| Fireplace Parts | 18 |
| Support Kits..... | 19 |


Typical Installation

CEILING SUPPORT INSTALLATIONS


One Story

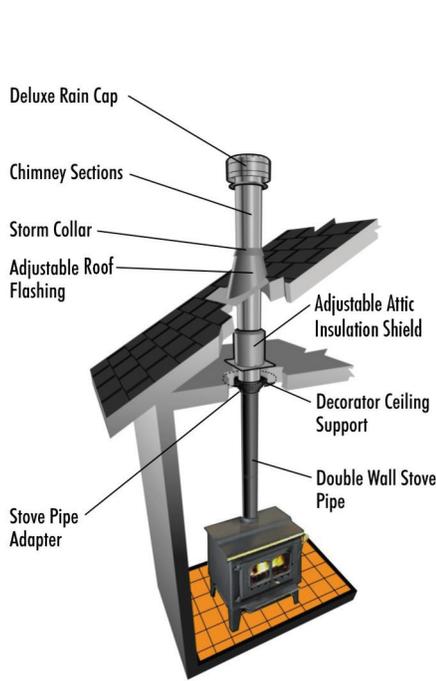

Two Story

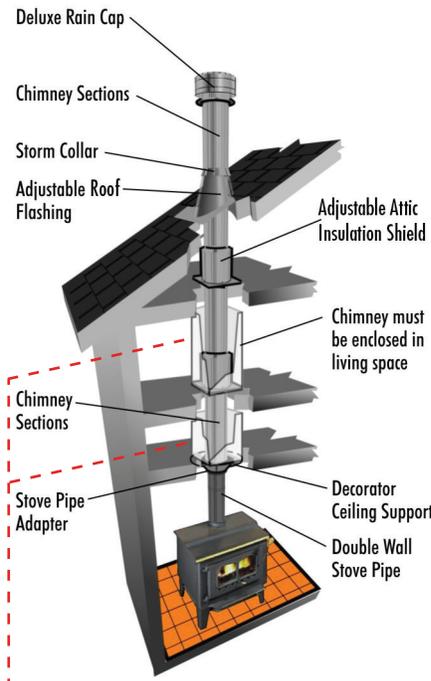


Elbow Installation

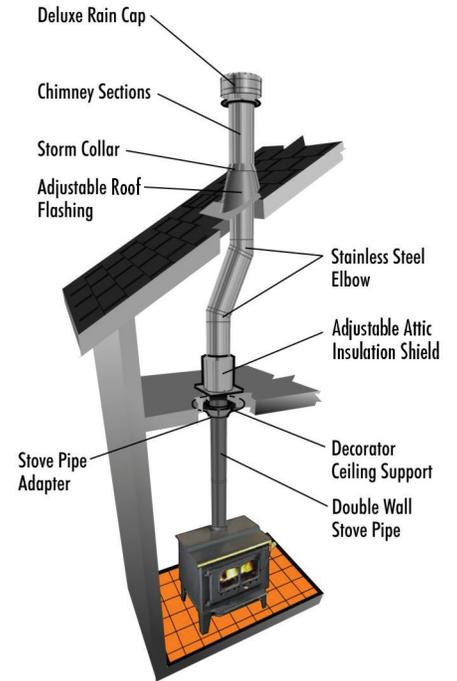


CEILING SUPPORT INSTALLATIONS

With Square Ceiling/Cathedral Support

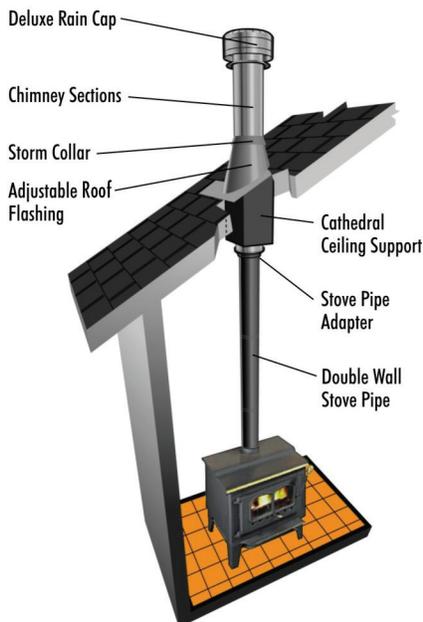


WALL SUPPORT INSTALLATIONS

One Story

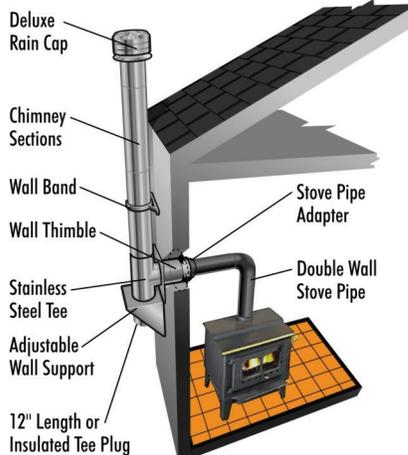

Through a Soffit

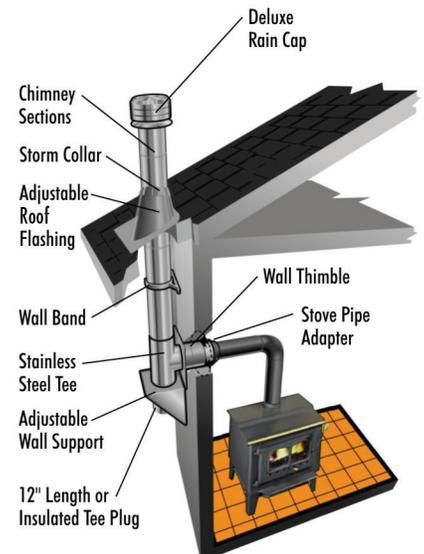

USE USP STOVE PIPE FOR OPTIMUM SYSTEM PERFORMANCE

Note: Technical data, photographs, drawings and installations may vary and are for reference only. Actual installations must be conducted according to the data and drawings shown in the installation instructions.

SUPERPRO.

TECHNICAL DATA SHEET

FOR THE CHIMNEY PROFESSIONAL WHO DEMANDS THE BEST...

SuperPro incorporates the latest technology in factory-built chimney design; providing superior performance, durability, and safety. SuperPro is designed to accompany today's appliances, which are engineered to produce low emissions and high heat. This makes SuperPro the choice of professionals who are looking for a better-quality, factory built chimney system.

CERTIFICATION & APPLICATIONS

SuperPro is Safety Tested and Listed to applicable UL/ULC Standards. These include:

Canada: ULC S-604

Safety Standard for chimneys serving liquid/gas fuel appliances

This chimney system may be used on appliances that burn Oil or Gas. SuperPro Model SPR may also be used with specific listed factory-built fireplaces listed to UL 127 or ULC-S610.

USA: UL 103-HT

Safety Standards for chimneys serving solid fuel and liquid fuel appliances. This chimney system has been designed for use on wood stoves, fireplaces and residential furnaces in the U. S. market.

Allowable Flue Gas Temperatures are:

| | |
|---------------------|---------------------------------|
| Maximum Continuous | 1000° F / 540° C |
| Brief Forced Firing | 1400° F / 760° C (60 min.) |
| Creosote Burn Out | 2100° F / 1150° C (3 x 10 min.) |

SMART CHOICE LIFETIME WARRANTY

The SuperPro Smart Choice Lifetime Warranty applies to all Chimney components (not just insulated lengths) making SuperPro chimney the smart choice, every time. (See written Warranty for details).

ENHANCED FEATURES

Premium Grade Stainless Steel construction of both the inner liner and outer casing make SuperPro chimney extremely corrosion resistant. Embossed couplers do not allow moisture to penetrate the chimney's outer wall. Sections simply 'twist-lock' together and may be secured with optional Locking Bands. The SuperPro product line features **Deluxe Chimney Support Components** that will enhance any installation.

SUPPORTS/FRAMING

All SuperPro Supports are designed to carry four times the combined weight of each system at maximum allowable height.

Support and Framing Dimensions Table


| Support | Ceiling Support | Wall Support | Cath. Ceiling Support | Roof Support |
|----------|--------------------|-------------------|-----------------------|--------------|
| | 50' | 38' | 38' | 50' |
| Diameter | Framing Dimensions | | | |
| 5" Dia. | 11-3/8" x 11-3/8" | 14-3/8" x 14-3/8" | 11" x 11" | 11" x 11" |
| 6" Dia. | 12-3/8" x 12-3/8" | 14-3/8" x 14-3/8" | 12" x 12" | 12" x 12" |
| 7" Dia. | 13-3/8" x 13-3/8" | 14-3/8" x 14-3/8" | 13" x 13" | 13" x 13" |
| 8" Dia. | 14-3/8" x 14-3/8" | 14-3/8" x 14-3/8" | 14" x 14" | 14" x 14" |

CONSTRUCTION

| | |
|---------------------|---|
| Inner Liner (Flue): | Premium Grade Stainless Steel 0.016" thickness |
| Outer Casing: | Premium Grade Stainless Steel 0.016" thickness |

Note: All SuperPro Twist-Lock Couplers are embossed (not lanced) and seams are weather-proofed to prevent moisture from entering the chimney.

Insulation: The 1" space between the inner/outer walls is Solid Packed with Mineral Wool Fibre insulation to provide superior insulating qualities, in a "slim-line" design. Solid Pack design performs favorably to Blanket type and Air-Cooled chimney designs.

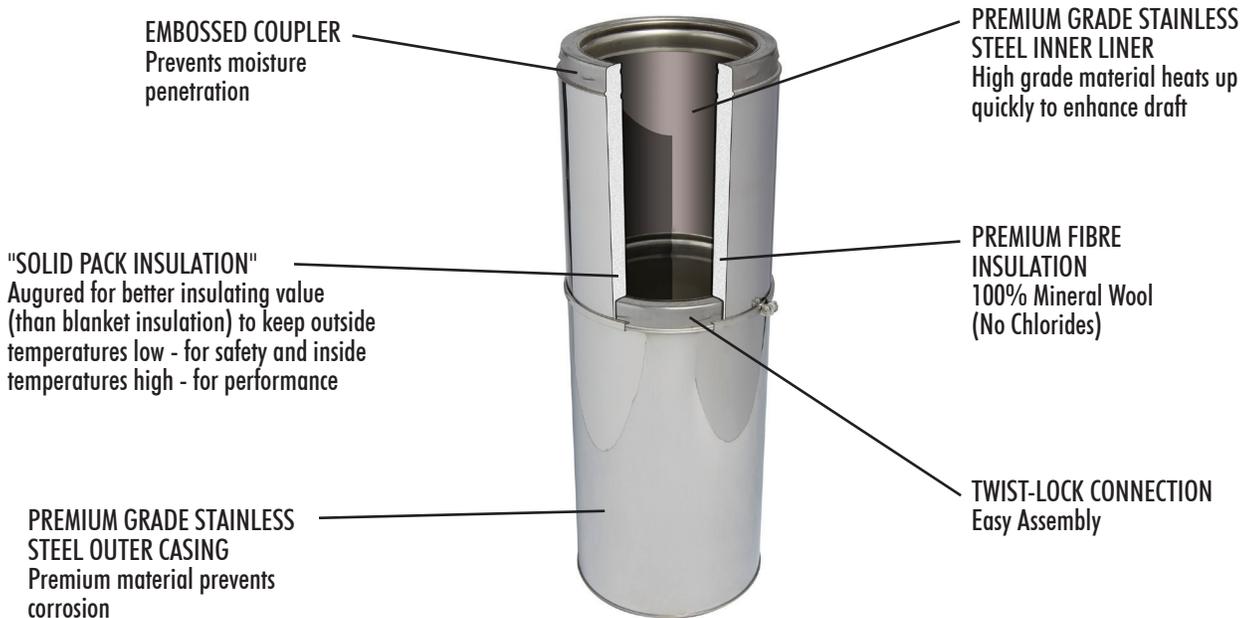


The Best Warranty in the Industry

Selkirk features an advanced engineering design and premium quality material which allow us to offer a Lifetime Warranty on all component parts. See written warranty for details.

Stainless Steel Chimney Lengths


The chimney must extend at least three feet above the highest point where it passes through the roof surface and at least two feet higher than any part of the building within a horizontal distance of ten feet.

HEIGHT REQUIREMENTS

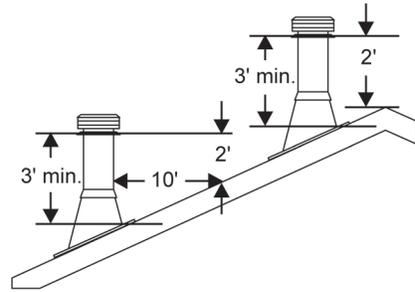


- Slim, advanced design allows for installation between 16" centers
- A 2" clearance to combustible materials must be maintained at all times, except in areas protected by factory supplied support certified for reduced clearance
- Secure twist-lock design couples chimney sections together with just a 1/8th turn
- Sectional overlap of 1-1/8"
- Chimneys are sized according to the inner diameter and are available in 5", 6", 7" and 8"

CHIMNEY SECTIONS

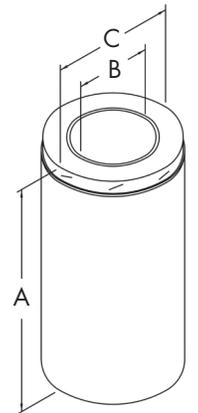

| Size | A | B | C | Product Code | Pack |
|-------------------|-----|----|-----|--------------|------|
| 5" x 36" | 36" | 5" | 7" | SPR5L36 | 1 |
| 5" x 24" | 24" | 5" | 7" | SPR5L24 | 1 |
| 5" x 18" | 18" | 5" | 7" | SPR5L18 | 1 |
| 5" x 12" | 12" | 5" | 7" | SPR5L12 | 1 |
| 5" x 6" | 6" | 5" | 7" | SPR5L6 | 1 |
| 6" SECTION | | | | | |
| 6" x 48" | 48" | 6" | 8" | SPR6L48 | 1 |
| 6" x 36" | 36" | 6" | 8" | SPR6L36 | 1 |
| 6" x 24" | 24" | 6" | 8" | SPR6L24 | 1 |
| 6" x 18" | 18" | 6" | 8" | SPR6L18 | 1 |
| 6" x 12" | 12" | 6" | 8" | SPR6L12 | 1 |
| 6" x 6" | 6" | 6" | 8" | SPR6L6 | 1 |
| 7" SECTION | | | | | |
| 7" x 48" | 48" | 7" | 9" | SPR7L48 | 1 |
| 7" x 36" | 36" | 7" | 9" | SPR7L36 | 1 |
| 7" x 24" | 24" | 7" | 9" | SPR7L24 | 1 |
| 7" x 18" | 18" | 7" | 9" | SPR7L18 | 1 |
| 7" x 12" | 12" | 7" | 9" | SPR7L12 | 1 |
| 7" x 6" | 6" | 7" | 9" | SPR7L6 | 1 |
| 8" SECTION | | | | | |
| 8" x 48" | 48" | 8" | 10" | SPR8L48 | 1 |
| 8" x 36" | 36" | 8" | 10" | SPR8L36 | 1 |
| 8" x 24" | 24" | 8" | 10" | SPR8L24 | 1 |
| 8" x 18" | 18" | 8" | 10" | SPR8L18 | 1 |
| 8" x 12" | 12" | 8" | 10" | SPR8L12 | 1 |
| 8" x 6" | 6" | 8" | 10" | SPR8L6 | 1 |


Adjustable Chimney Length

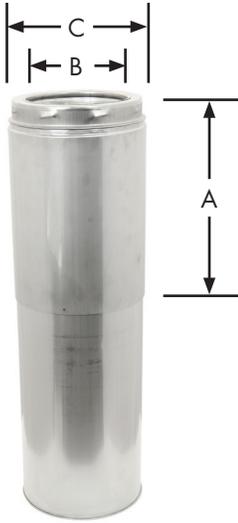

- SuperPro Adjustable Length
- Used to adjust the system to an exact overall height
- Used between elbows for a required offset distance
- All stainless construction and includes hardware
- Length adjusts from 2" to 9-1/2"

| Size | A | B | C | Product Code | Pack |
|----------|----------|----|-----|--------------|------|
| 5" x 12" | Adj. 12" | 5" | 7" | SPR5AL12 | 1 |
| 6" x 12" | Adj. 12" | 6" | 8" | SPR6AL12 | 1 |
| 7" x 12" | Adj. 12" | 7" | 9" | SPR7AL12 | 1 |
| 8" x 12" | Adj. 12" | 8" | 10" | SPR8AL12 | 1 |

LOCKING BANDS

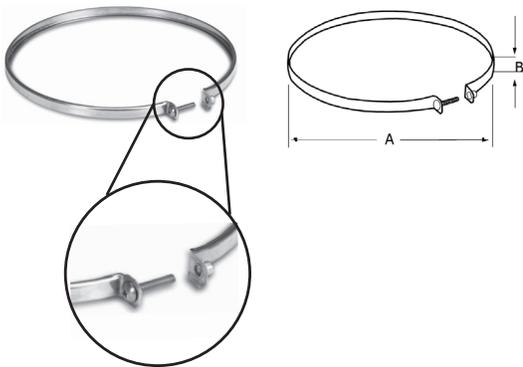

- Two flanges engage the curls in each end of the adjoining sections holding them securely together
- Supplied with Captured Nut & Bolt
- Locking Bands must be used:
 - on all sections that make up an offset
 - on tee branch to attach a chimney length
 - on any length suspended below the Cathedral or Roof Support
- While Locking Bands are not required on other chimney lengths, their use is recommended for added safety and stability. It also provides a more attractive appearance


| Size | A | B | Product Code | Pack |
|------|-----|-------|--------------|------|
| 5" | 7" | 7/16" | SPR5SLB | 5 |
| 6" | 8" | 7/16" | SPR6SLB | 5 |
| 7" | 9" | 7/16" | SPR7SLB | 5 |
| 8" | 10" | 7/16" | SPR8SLB | 5 |

Stainless Steel Elbows

15° OFFSET CHART

| Offset | | | | Height | | | | Lengths Required | | | | |
|--------|--------|--------|--------|--------|--------|--------|--------|------------------|-----|-----|-----|-----|
| 5" | 6" | 7" | 8" | 5" | 6" | 7" | 8" | 6" | 12" | 18" | 24" | 36" |
| 1-1/2 | 1-1/8 | 1-1/8 | 1-1/4 | 9 | 10 | 10-1/4 | 10-3/8 | - | - | - | - | - |
| 2-1/8 | 2-3/8 | 2-3/8 | 2-1/2 | 13-1/2 | 14-1/4 | 15 | 15-5/8 | 1 | - | - | - | - |
| 4 | 4 | 4 | 4 | 19-1/8 | 20-1/2 | 20-3/4 | 21 | - | 1 | - | - | - |
| 5-1/2 | 5-1/2 | 5-1/2 | 5-1/2 | 25 | 26-1/4 | 26-1/2 | 26-3/4 | - | - | 1 | - | - |
| 7-1/2 | 7 | 7 | 7 | 30-1/2 | 32 | 32-1/4 | 32-1/2 | - | - | - | 1 | - |
| 10-1/8 | 10-1/8 | 10-1/4 | 10-1/4 | 42 | 43-5/8 | 44 | 44-1/8 | - | - | - | - | 1 |
| 11-1/4 | 11-3/8 | 11-1/2 | 11-1/2 | 48-1/4 | 48-3/8 | 48-5/8 | 48-7/8 | 1 | - | - | - | 1 |
| 12-3/4 | 13 | 13 | 13 | 54 | 54-1/8 | 54-3/8 | 54-5/8 | - | 1 | - | - | 1 |
| 14-3/8 | 14-1/2 | 14-1/2 | 14-5/8 | 59-3/4 | 60 | 60-1/8 | 60-3/8 | - | - | 1 | - | 1 |
| 16 | 16-1/8 | 16-1/8 | 16-1/8 | 65-1/2 | 65-3/4 | 66 | 66-1/4 | - | - | - | 1 | 1 |
| 19 | 19 | 19 | 19 | 76-1/4 | 76-1/4 | 76-1/2 | 76-3/4 | - | 1 | - | 1 | 1 |

This chart has three columns for elbow angle required to achieve your desired offset. The first column ("Offset") is the horizontal measurement, at the chimney center line, of the offset needed to get around an obstacle. The second column ("Height") is the height of the assembled offset elbow to the top of the return elbow. Column 3 shows the appropriate lengths required.

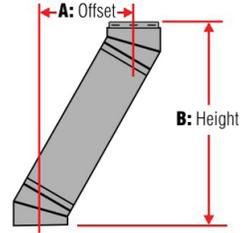

1. Determine the distance of the offset required
2. On the chart, find the predetermined distance required for the elbow kit under the corresponding chimney diameter
3. After finding the offset, follow across the chart to find the specified height and appropriate chimney lengths required under their corresponding diameters

All measurements in inches. Offset tolerances ± one inch.

30° OFFSET CHART

| Offset | | | | Height | | | | Lengths Required | | | | |
|--------|--------|--------|--------|--------|--------|--------|--------|------------------|-----|-----|-----|-----|
| 5" | 6" | 7" | 8" | 5" | 6" | 7" | 8" | 6" | 12" | 18" | 24" | 36" |
| 3 | 2-3/4 | 3-1/8 | 3-1/2 | 10 | 11-5/8 | 13 | 14-1/2 | - | - | - | - | - |
| 5-1/4 | 5-1/4 | 5-5/8 | 6 | 14 | 15-7/8 | 17-1/4 | 18-3/8 | 1 | - | - | - | - |
| 9 | 8-1/4 | 8-5/8 | 9 | 19-1/4 | 21 | 22-3/8 | 24 | - | 1 | - | - | - |
| 11-1/4 | 11-1/4 | 11-5/8 | 12 | 24-1/2 | 26-1/4 | 27-5/8 | 29-1/8 | - | - | 1 | - | - |
| 14-1/4 | 14-1/4 | 14-5/8 | 15 | 29-3/4 | 31-3/8 | 32-7/8 | 32-3/8 | - | - | - | 1 | - |
| 20 | 20-1/4 | 20-5/8 | 21 | 39-3/4 | 41-7/8 | 43-1/4 | 44-3/4 | - | - | - | - | 1 |
| 21-7/8 | 22-5/8 | 23 | 23-1/2 | 44-1/2 | 46 | 47-1/2 | 49 | 1 | - | - | - | 1 |
| 23-7/8 | 25-5/8 | 26 | 26-1/2 | 50-1/8 | 51-1/4 | 52-5/8 | 54-1/8 | - | 1 | - | - | 1 |
| 27-1/8 | 28-5/8 | 29 | 29-1/2 | 55-1/8 | 56-3/8 | 57-3/8 | 59-3/8 | - | - | 1 | - | 1 |
| 30-3/8 | 31-5/8 | 32 | 32 | 60-5/8 | 61-5/8 | 63 | 64-1/2 | - | - | - | 1 | 1 |
| 37 | 37-1/8 | 37-1/2 | 38 | 69-3/8 | 71 | 72-1/2 | 74 | - | 1 | - | 1 | 1 |

45° OFFSET CHART

| Offset | | | | Height | | | | Lengths Required | | | | |
|----------|--------|--------|--------|---------|--------|--------|--------|------------------|-----|-----|-----|-----|
| 5" | 6" | 7" | 8" | 5" | 6" | 7" | 8" | 6" | 12" | 18" | 24" | 36" |
| 6 | 4-3/8 | 5-1/2 | 5-3/4 | 10-1/8 | 12 | 14 | 15-1/8 | - | - | - | - | - |
| 9-1/8 | 7-3/4 | 9-3/4 | 9-1/2 | 13-5/16 | 15-5/8 | 18 | 19-1/4 | 1 | - | - | - | - |
| 13-3/8 | 11-7/8 | 13 | 13 | 17-1/2 | 19-3/4 | 21-3/4 | 22-1/2 | - | 1 | - | - | - |
| 17-5/8 | 16 | 17-1/4 | 17 | 21-3/4 | 23-7/8 | 25-3/8 | 27 | - | - | 1 | - | - |
| 21-13/16 | 20-1/2 | 21-3/4 | 21-5/8 | 26 | 27-3/4 | 29-7/8 | 31 | - | - | - | 1 | - |
| 29-5/16 | 23-7/8 | 25-5/8 | 24-5/8 | 33-7/16 | 31-3/8 | 32-3/4 | 34-1/2 | - | 1 | - | 1 | - |
| 30-3/8 | 28-1/2 | 30-5/8 | 29-5/8 | 34-1/2 | 36-7/8 | 38-1/8 | 39-7/8 | - | - | - | - | 1 |
| 37-3/4 | 36-1/4 | 38-1/8 | 38-1/8 | 41-7/8 | 44-3/8 | 45-1/8 | 47 | - | 1 | - | - | 1 |
| 42 | 40-1/8 | 42-3/4 | 41-7/8 | 46-3/16 | 49-1/4 | 49-1/4 | 51-1/2 | - | - | 1 | - | 1 |
| 46-1/4 | 47-7/8 | 50-1/2 | 49 | 50-7/16 | 56-1/2 | 57-3/8 | 59-3/8 | - | - | - | 1 | 1 |
| 53-5/8 | 41-1/2 | 38-1/4 | 38-1/2 | 57-7/8 | 45-5/8 | 46-1/2 | 48-7/8 | - | 1 | - | 1 | 1 |

NOTE: 45° Elbow Kits may be used in Canada only.

ELBOW KITS INCLUDE:

- 2 ELBOWS
- 4 LOCKING BANDS
- 1 ELBOW SUPPORT
- HARDWARE PACK




INSULATED 15°, 30° AND 45° ELBOW KITS

- The Insulated Elbow is used when an offset is required
- Locking Bands must be used on all elbows
- A maximum of 6 feet is allowable between elbows
- Elbow is fully insulated and can be used at the same 2" clearance as chimney lengths
- Elbow support must be used with all offset installations
- Elbows do not have locking ridges and can be rotated to attain optimum positioning, and allow chimney to return to correct vertical alignment, prior to installing Locking Bands

NOTE: 45° Elbow Kits may be used in Canada only.


Stainless Steel Elbows continued

15° ELBOW




| Size | A | B | C | Product Code | Pack |
|----------|--------|---------|----------|--------------|------|
| 15° - 5" | 3-3/8" | 2-7/16" | 1-15/16" | SPR5EL15K | 1 |
| 15° - 6" | 3-3/8" | 2-1/2" | 2" | SPR6EL15K | 1 |
| 15° - 7" | 3-3/8" | 2-9/16" | 2-1/16" | SPR7EL15K | 1 |
| 15° - 8" | 3-3/8" | 2-5/8" | 2-1/8" | SPR8EL15K | 1 |

30° ELBOW



| Size | A | B | C | Product Code | Pack |
|----------|--------|---------|----------|--------------|------|
| 30° - 5" | 2-3/4" | 2-9/16" | 2-9/16" | SPR5EL30K | 1 |
| 30° - 6" | 3-1/4" | 3-1/16" | 2-9/16" | SPR6EL30K | 1 |
| 30° - 7" | 3-3/4" | 3-7/16" | 2-15/16" | SPR7EL30K | 1 |
| 30° - 8" | 4-1/4" | 3-7/8" | 3-3/8" | SPR8EL30K | 1 |

45° ELBOW



| Size | A | B | C | Product Code | Pack |
|----------|----------|--------|---------|--------------|------|
| 45° - 5" | 1-15/16" | 2-3/4" | 2-3/8" | SPR5EL45K | 1 |
| 45° - 6" | 2-1/8" | 3-1/8" | 2-9/16" | SPR6EL45K | 1 |
| 45° - 7" | 2-3/8" | 3-3/8" | 3" | SPR7EL45K | 1 |
| 45° - 8" | 2-9/16" | 3-3/4" | 3-5/16" | SPR8EL45K | 1 |


NOTE: 45° Elbows may be used in Canada only.

Tee Components

- The insulated chimney tee is used for through-the-wall installation using a wall support
- A chimney length is attached to the tee branch using a Locking Band to pass safely through a wall
- Supplied with uninsulated Tee Plug

| Size | A | B | C | D | E | Product Code | Pack |
|------|-----|----|---------|--------|---------|--------------|------|
| 5" | 7" | 5" | 10-1/2" | 5" | 5" | SPR5ITP | 1 |
| 6" | 8" | 6" | 11-1/2" | 5-5/8" | 5-3/4" | SPR6ITP | 1 |
| 7" | 9" | 7" | 12-1/4" | 6-1/4" | 6-3/16" | SPR7ITP | 1 |
| 8" | 10" | 8" | 13-3/8" | 6-5/8" | 6-1/2" | SPR8ITP | 1 |


INSULATED TEE WITH PLUG

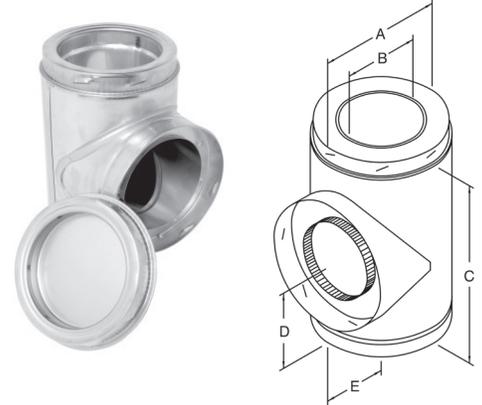

- Used under the AWS Wall Support
- Removable to provide easy access for chimney inspection and maintenance
- Insulated to help maintain flue gas temperature

| Size | A | B | C | Product Code | Pack |
|------|-----|----|--------|--------------|------|
| 5" | 7" | 5" | 2-7/8" | J51TPI | 1 |
| 6" | 8" | 6" | 2-7/8" | J61TPI | 1 |
| 7" | 9" | 7" | 2-7/8" | J71TPI | 1 |
| 8" | 10" | 8" | 2-7/8" | J81TPI | 1 |

INSULATED TEE PLUG

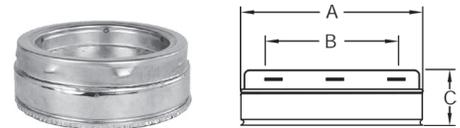


- Replacement Non-Twist Lock Insulated Tee Cap used with the WS Wall Support
- Removable to provide easy access for chimney inspection and maintenance
- Insulated to help maintain flue gas temperature

| Size | A | B | C | Product Code | Pack |
|------|--------|----------|---------|--------------|------|
| 5" | 6-1/8" | 4-31/32" | 1-9/32" | SPR5NTITC | 1 |
| 6" | 7-1/8" | 5-31/32" | 1-9/32" | SPR6NTITC | 1 |
| 7" | 8-1/8" | 6-31/32" | 1-9/32" | SPR7NTITC | 1 |
| 8" | 9-1/8" | 7-31/32" | 1-9/32" | SPR8NTITC | 1 |

NON-TWIST LOCK INSULATED TEE CAP




ADJUSTABLE WALL SUPPORT

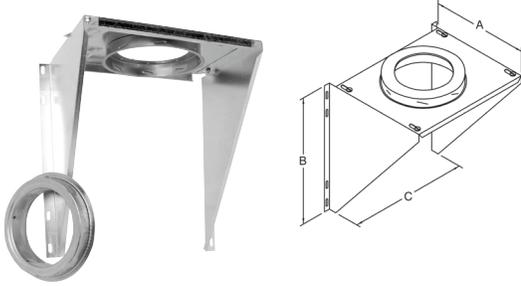

- Used to support the chimney on a through-the-wall installation
- Will support up to 38 feet of chimney
- Includes wall support top plate with female coupler attached, male adapter ring, side brackets and hardware

| Size | A | B | C | Product Code | Pack |
|------|-----|---------|-----|--------------|------|
| 5" | 10" | 17-1/8" | 16" | JSC5AWS | 1 |
| 6" | 11" | 17-1/8" | 16" | JSC6AWS | 1 |
| 7" | 12" | 17-1/8" | 16" | JSC7AWS | 1 |
| 8" | 13" | 17-1/8" | 16" | JSC8AWS | 1 |


ADJUSTABLE INTERMEDIATE WALL SUPPORT

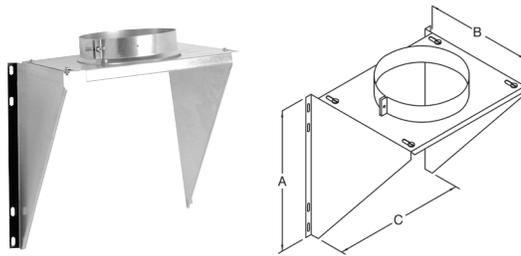

- Used as supplementary support when chimney system height exceeds maximum height allowed by Wall Support
- Supports an additional 38 feet of chimney
- Includes Top Plate, Support Band, Side Brackets and Hardware

| Size | A | B | C | Product Code | Pack |
|------|---------|-----|-----|--------------|------|
| 6" | 17-1/8" | 11" | 16" | JSC6AIWS | 1 |
| 7" | 17-1/8" | 12" | 16" | JSC7AIWS | 1 |
| 8" | 17-1/8" | 13" | 16" | JSC8AIWS | 1 |


ADJUSTABLE WALL SUPPORT WITH INSULATED TEE CAP

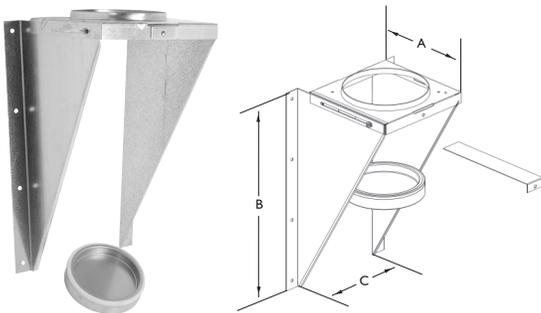

- Used to support chimney on a through-the-wall installation
- Will support between 30 feet and 74 feet of chimney height based on size & orientation from wall
- Adjustment of 2" to 6" from a vertical wall
- Includes wall support top plate, side brackets, hardware, non-twist lock insulated tee cap, and L-bracket to contain tee cap

| Size | A | B | C | Product Code | Pack |
|------|---------|---------|-----|--------------|------|
| 5" | 10-5/8" | 18-7/8" | 12" | JSC5WS | 1 |
| 6" | 10-5/8" | 18-7/8" | 12" | JSC6WS | 1 |
| 7" | 11-5/8" | 20-1/2" | 13" | JSC7WS | 1 |
| 8" | 12-5/8" | 21-7/8" | 14" | JSC8WS | 1 |

UNIVERSAL EXTENDED WALL SUPPORT

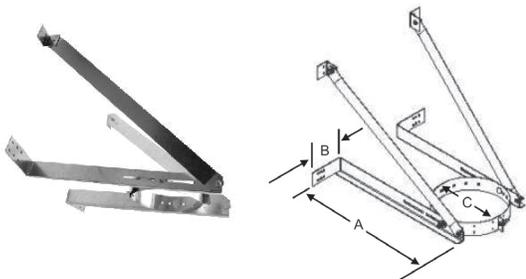

- Designed to support a vertical wall installation above the insulated tee
- Will support up to 28 feet of chimney
- Adjusts up to 12" from a vertical wall & will allow to pass by a 12" overhang


| Size | A | B | C | Product Code | Pack |
|----------|-----|----|-----------|--------------|------|
| 6" to 8" | 22" | 4" | 8" to 10" | 0800900 | 1 |

Supports continued

- Supports up to 50 feet of chimney
- Matte black support gives a finished appearance

| Size | A | B | C | Product Code | Pack |
|------|---------|---------|---------|--------------|------|
| 6" | 17-7/8" | 12-3/8" | 8-1/4" | JSC6DCSS | 1 |
| 7" | 17-7/8" | 13-3/8" | 9-1/4" | JSC7DCSS | 1 |
| 8" | 19-5/8" | 14-3/8" | 10-1/4" | JSC8DCSS | 1 |


DECORATOR CEILING SUPPORT-SPUN

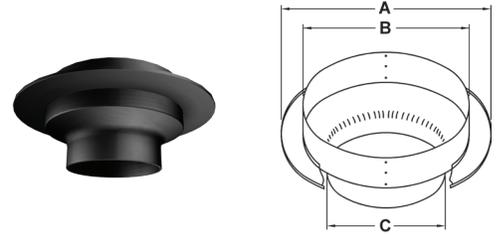

- For use in ceiling support installations
- Supports up to 50 feet of chimney
- Matte black finish gives a premium finished appearance

| Size | A | B | C | Product Code | Pack |
|------|---------|---------|---------|--------------|------|
| 5" | 17-7/8" | 11-3/8" | 7-1/4" | SPR5CSB | 1 |
| 6" | 17-7/8" | 12-3/8" | 8-1/4" | SPR6CSB | 1 |
| 7" | 17-7/8" | 13-3/8" | 9-1/4" | SPR7CSB | 1 |
| 8" | 19-5/8" | 14-3/8" | 10-1/4" | SPR8CSB | 1 |


DECORATOR CEILING SUPPORT

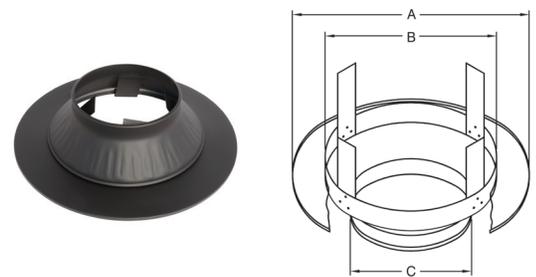

- Used in pitched ceiling support installations
- Supports up to 38 feet of chimney
- Matte black finish
- Includes Support Box, Support Band and Ceiling Trim pieces

| Size | A | B | C | Product Code | Pack |
|------|----------|-----|-----|--------------|------|
| 5" | 7-3/16" | 11" | 17" | SPR5CCSB | 1 |
| 6" | 8-3/16" | 12" | 17" | SPR6CCSB | 1 |
| 7" | 9-3/16" | 13" | 17" | SPR7CCSB | 1 |
| 8" | 10-3/16" | 14" | 17" | SPR8CCSB | 1 |


CATHEDRAL CEILING SUPPORT BOX

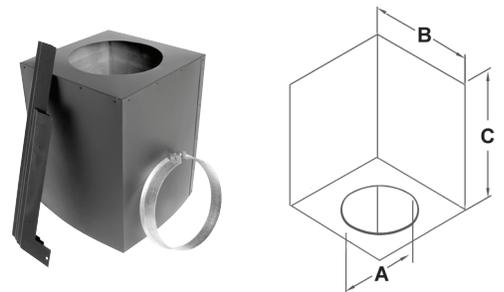

- The Roof Support may be used on a floor, ceiling or roof and adjusts to any roof pitch
- It may be used above an offset to support the offset or as a supplementary support when the chimney height exceeds that of the primary support
- The Roof Support will support a total height of 50 feet of chimney


| Size | A | B | Product Code | Pack |
|------|-----|----|--------------|------|
| 5" | 7" | 5" | JSC5RS | 1 |
| 6" | 8" | 5" | JSC6RS | 1 |
| 7" | 9" | 5" | JSC7RS | 1 |
| 8" | 10" | 5" | JSC8RS | 1 |

ROOF SUPPORT

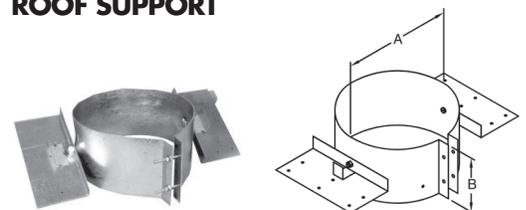

Shields


ADJUSTABLE ATTIC INSULATION SHIELD

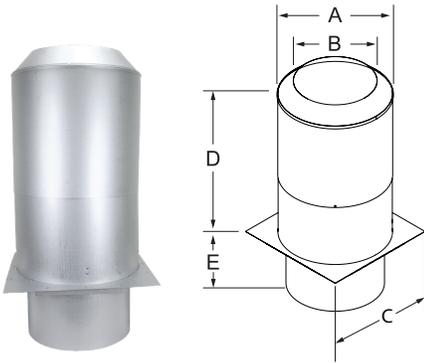

- The AAIS must be installed where the chimney enters the attic space in any installation
- Designed to keep insulation away from the chimney, and to maintain the mandatory 2" clearance to combustibles
- Adjustable from 12" to 22" for flexible installation
- Drop-Down Shield protects joist area

| Size | A | B | C | D | E | Product Code | Pack |
|------|----------|----------|-----|------------|--------|--------------|------|
| 5" | 11-7/16" | 7-3/16" | 13" | 12" to 22" | 8-1/2" | JSC5AAIS | 1 |
| 6" | 12-7/16" | 8-3/16" | 14" | 12" to 22" | 8-1/2" | JSC6AAIS | 1 |
| 7" | 13-7/16" | 9-3/16" | 15" | 12" to 22" | 8-1/2" | JSC7AAIS | 1 |
| 8" | 14-7/16" | 10-3/16" | 16" | 12" to 22" | 8-1/2" | JSC8AAIS | 1 |


FIRESTOP RADIATION SHIELD

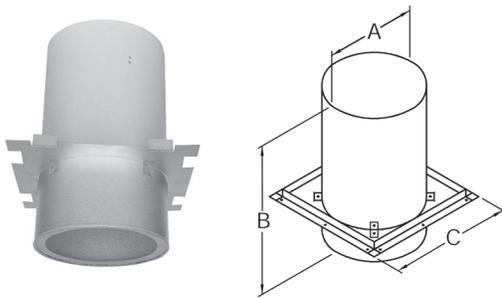

- Also known as a Firestop Joist Shield
- Required where the chimney passes from one lower living space to another living space
- Maintains the mandatory 2" clearance to combustibles

| Size | A | B | C | Product Code | Pack |
|------|-----|-----|-----|--------------|------|
| 5" | 9" | 19" | 13" | JSC5FRS | 1 |
| 6" | 10" | 19" | 14" | JSC6FRS | 1 |
| 7" | 11" | 19" | 15" | JSC7FRS | 1 |
| 8" | 12" | 19" | 16" | JSC8FRS | 1 |


RAFTER RADIATION SHIELD

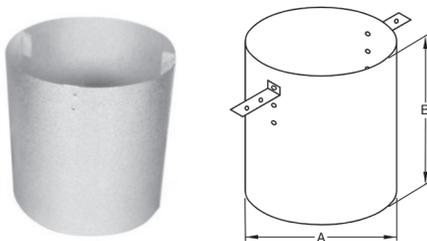

- The RRS must be installed where the chimney is enclosed immediately below the roof line

| Size | A | B | Product Code | Pack |
|------|-----|-----|--------------|------|
| 5" | 9" | 12" | JSC5RRS | 1 |
| 6" | 10" | 12" | JSC6RRS | 1 |
| 7" | 11" | 12" | JSC7RRS | 1 |
| 8" | 12" | 12" | JSC8RRS | 1 |

WALL THIMBLE

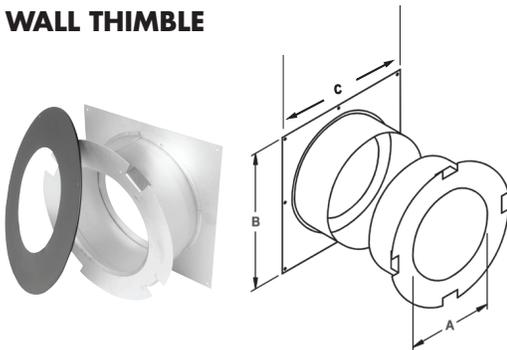

Add JUSI (pg. 17) to the Wall Thimble for increased performance and safety.


- Used in a wall support installation
- Radiation shield is included with spacers which maintain the mandatory 2" clearance to combustibles
- Attractive matte black finishing trim is included
- Extends to fit 7" wall thickness

| Size | A | B | C | Product Code | Pack |
|------|---------|-----|---------|--------------|------|
| 5" | 7-1/8" | 16" | 16-1/8" | SPR5WTB | 1 |
| 6" | 8-1/8" | 16" | 16-1/8" | SPR6WTB | 1 |
| 7" | 9-1/8" | 16" | 16-1/8" | SPR7WTB | 1 |
| 8" | 10-1/8" | 16" | 16-1/8" | SPR8WTB | 1 |

Flashings and Storm Collars

To determine what Roof Flashing you'll require, you must work out the pitch of your roof. To determine the pitch, you'll need two rulers and a level. Measure the number of inches from the end of the level down to the roof.

ROOF FLASHING SELECTION CHART

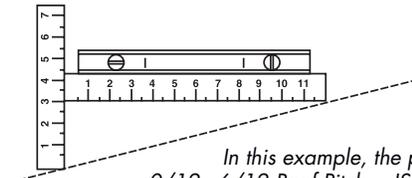


In this example, the pitch is 3/12.
 0/12 - 6/12 Roof Pitch = JSC 6 or 7 AAF
 6/12 - 12/12 Roof Pitch = JSC 6 or 7 AF2

- Used where the chimney passes through a roof with a pitch of Flat to 6/12
- Comes complete with Storm Collar
- All seams are sealed with Silicone Sealant
- Galvalume construction

| Size | A | Product Code | Pack |
|------|-------------------|--------------|------|
| 5" | 24" x 24" | JSC5AAF-3 | 3 |
| 6" | 24" x 24" | JSC6AAF-3 | 3 |
| 7" | 24" x 24" | JSC7AAF-3 | 3 |
| 8" | 27-1/2" x 27-1/2" | JSC8AAF-3 | 3 |


ADJUSTABLE FLASHING ASSEMBLY- FLAT TO 6/12

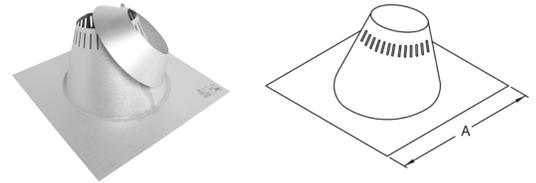

- Used where the chimney passes through a roof with a pitch of 6/12 to 12/12
- Comes complete with Storm Collar
- All seams are sealed with Silicone Sealant
- Galvalume construction

| Size | A | Product Code | Pack |
|------|---------------|--------------|------|
| 5" | 30" x 21-1/2" | JSC5AF2-3 | 3 |
| 6" | 30" x 21-1/2" | JSC6AF2-3 | 3 |
| 7" | 30" x 21-1/2" | JSC7AF2-3 | 3 |
| 8" | 30" x 21-1/2" | JSC8AF2-3 | 3 |


ADJUSTABLE FLASHING ASSEMBLY- 6/12 TO 12/12

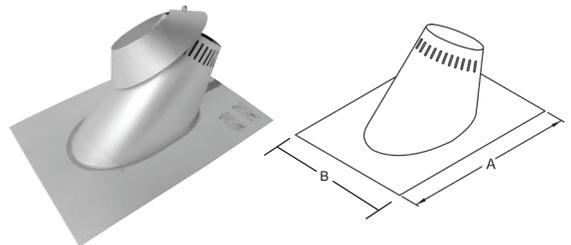


- Used on flat roof surfaces
- All seams are sealed with Silicone Sealant
- Comes complete with Storm Collar

| Size | A | B | Product Code | Pack |
|------|-----|-----|--------------|------|
| 5" | 24" | 12" | JSC5ATC | 3 |
| 6" | 24" | 12" | JSC6ATC | 3 |
| 7" | 24" | 12" | JSC7ATC | 3 |
| 8" | 24" | 12" | JSC8ATC | 3 |

TALL CONE FLASHING

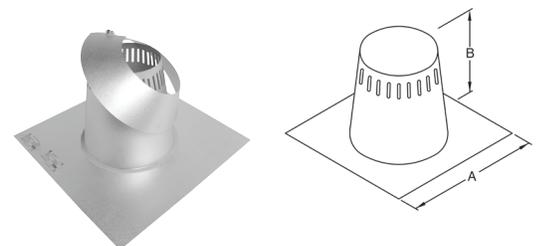


PEAK FLASHING - 3/12 TO 6/12

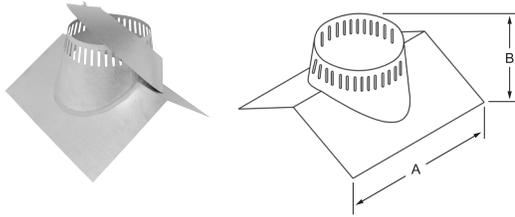

- Available in 7" only
- Required where the chimney passes through a peaked roof with a pitch of 3/12 to 6/12
- Comes complete with Storm Collar

| Size | A | B | Product Code | Pack |
|------|-----|-----|--------------|------|
| 7" | 22" | 10" | JSC7P1 | 1 |

PEAK FLASHING - 7/12 TO 9/12

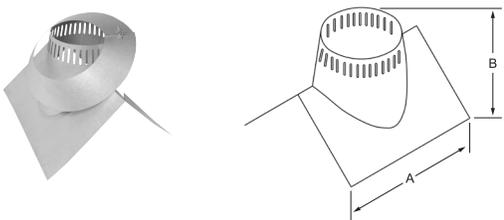

- Available in 7" only
- Required where the chimney passes through a peaked roof with a pitch of 7/12 to 9/12
- Comes complete with Storm Collar

| Size | A | B | Product Code | Pack |
|------|-----|-----|--------------|------|
| 7" | 20" | 14" | JSC7P2 | 1 |


RUBBER BOOT FLASHING KIT



- This kit fits 5", 6", 7" and 8" Chimneys
- Used where the chimney passes through a corrugated roof
- Rubber Boot Flashing fits roof pitches up to 12/12 (10/12 for 8")
- Kit includes rubber boot, spacer kit, special storm collar and mounting hardware

| Size | Product Code | Pack |
|------|--------------|------|
| ALL | JURBFK1 | 1 |

ALUMINUM STORM COLLAR



Used in conjunction with Roof Flashing to keep precipitation out.

| Size | A | B | Product Code | Pack |
|------|-----|--------|--------------|------|
| 5" | 7" | 5-1/2" | JSC56ASC-1 | 1 |
| 6" | 8" | 5-1/2" | JSC56ASC-1 | 1 |
| 7" | 9" | 5-1/2" | JSC78ASC-1 | 1 |
| 8" | 10" | 5-1/2" | JSC78ASC-1 | 1 |

SILICONE SEALANT FOR STORM COLLAR



Used to seal Storm Collar to chimney length above cone of flashing.

| Size | Product Code | Pack |
|--------------|--------------|------|
| 3 ounce tube | JRTV | 1 |

Premium Rain Caps

- Advanced design, premium quality stainless steel
- Provides protection against the elements
- Twist-lock connection for secure installation

| Size | A | B | C | Product Code | Pack |
|------|-----|--------|---------|--------------|------|
| 5" | 7" | 7-1/8" | 11-1/4" | SPR5DRC | 1 |
| 6" | 8" | 7-1/4" | 11-1/4" | SPR6DRC | 1 |
| 7" | 9" | 7-1/2" | 13-1/4" | SPR7DRC | 1 |
| 8" | 10" | 7-5/8" | 14-1/4" | SPR8DRC | 1 |


Stainless steel mesh wire fits inside Rain Cap.

| Size | Dimensions | Product Code | Pack |
|------|--------------|--------------|------|
| 5" | 4-1/2" x 26" | JSC5SPAR | 10 |
| 6" | 4-1/2" x 26" | JSC6SPAR | 10 |
| 7" | 4-1/2" x 29" | JSC7SPAR | 10 |
| 8" | 4-1/2" x 32" | JSC8SPAR | 10 |


- Designed to address chimneys with downdraft issues.
- Diverts wind and rain to ensure flue gases are directed outward efficiently & effectively.
- Constructed of 300 Series Stainless Steel for strength & durability.
- Available in 5", 6", 7", 8" & 10" Diameters
- Listed & approved to UL 103HT

| Size | A | B | C | Product No. | Part No. | Pack |
|------|---------|-----|--------|-------------|----------|------|
| 5" | 17-1/4" | 6" | 4-3/4" | 195802 | 5DK | 1 |
| 6" | 19-1/4" | 7" | 5-3/4" | 196802 | 6DK | 1 |
| 7" | 19-1/4" | 8" | 6-3/4" | 197802 | 7DK | 1 |
| 8" | 19-1/4" | 9" | 7-3/4" | 198802 | 8DK | 1 |
| 10" | 19-1/4" | 11" | 9-3/4" | 1910802 | 10DK | 1 |


DELUXE RAIN CAP

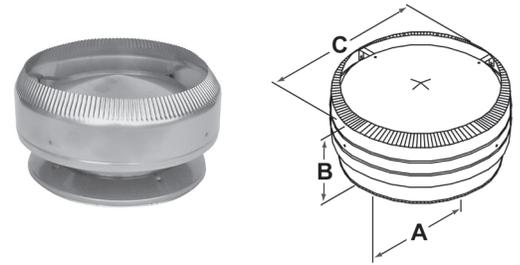

SPARK ARRESTOR

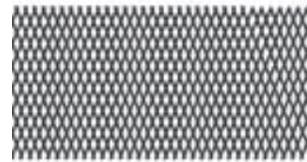


DIKAPT CHIMNEY CAP

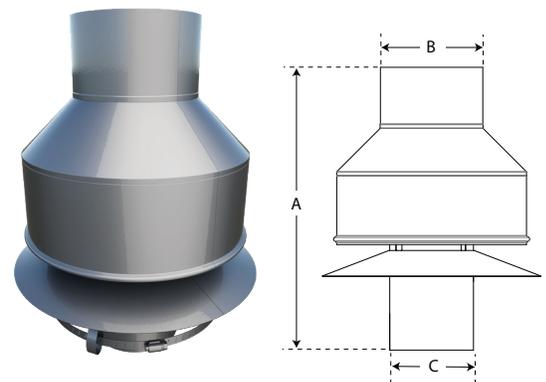

Parts and Accessories


UNIVERSAL WALL BAND

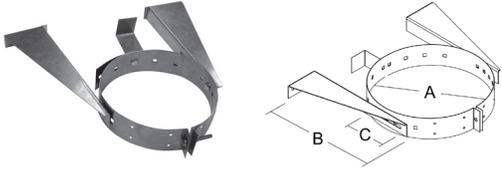

- Provides lateral support for the chimney when installed adjacent to a wall
- Provides more than 4" of horizontal adjustability to clear some overhangs and obstructions
- Required at 8 foot or closer intervals to stabilize the chimney, whenever it is supported along a vertical wall

| Size | A | B | C | Product Code | Pack |
|----------|-----------|-----|----|--------------|------|
| 6" to 8" | 8" to 10" | 17" | 4" | JSC-UWB | 1 |


WALL BAND

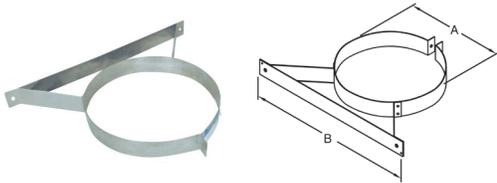

- Stainless steel construction
- Provides lateral support for the chimney when installed adjacent to a wall
- Maintains the mandatory 2" clearance to combustibles
- Installed on first length above the Tee, then every 8 feet thereafter

| Size | A | B | Product Code | Pack |
|------|-----|-----|--------------|------|
| 5" | 7" | 17" | JSC5WB | 1 |
| 6" | 8" | 17" | JSC6WB | 1 |
| 7" | 9" | 17" | JSC7WB | 1 |
| 8" | 10" | 17" | JSC8WB | 1 |

BLACK STOVE PIPE ADAPTER

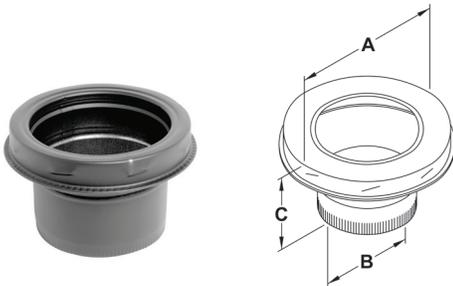

- For a quick and easy transition from black stove pipe to factory-built chimney
- Twist-lock for easy connection

| Size | A | B | C | Product Code | Pack |
|------|-----|----|----|--------------|------|
| 5" | 7" | 5" | 5" | JSC5ASE | 1 |
| 6" | 8" | 6" | 5" | JSC6ASE | 1 |
| 7" | 9" | 7" | 5" | JSC7ASE | 1 |
| 8" | 10" | 8" | 5" | JSC8ASE | 1 |

Parts and Accessories continued

- Used where the chimney passes through a soffit to provide a finished appearance
- Maintains the mandatory 2" clearance to combustibles

| Size | A | B | Product Code | Pack |
|------|---------|-----|--------------|------|
| 5" | 7-1/8" | 13" | JSC5FP | 1 |
| 6" | 8-1/8" | 14" | JSC6FP | 1 |
| 7" | 9-1/8" | 15" | JSC7FP | 1 |
| 8" | 10-1/8" | 16" | JSC8FP | 1 |

- Designed to provide extra stability for chimney system above roof line
- Required when the chimney extends 5 feet or more above the roof. Use one kit every 5 feet
- Telescoping legs can adjust from 5' to 9'
- Support band adjusts to fit 6", 7", and 8" chimney

| Size | Dimensions | Product Code | Pack |
|----------|------------------------|--------------|------|
| 6" to 8" | Band adjusts 8" to 10" | 0843900 | 1 |


- Designed to deflect snow and ice while preventing unnecessary strain or damage to chimney
- Mounts directly above chimney pipe with easy panel assembly
- Made from heavy gauge galvanized steel

| Size | Product Code | Pack |
|----------|--------------|------|
| 5" to 8" | 2001922 | 1 |

- Insulation for use with:
 - Adjustable Attic Insulation Shield (JSC*AAIS)
 - Wall Thimble (SPR*WTB)
 - Cathedral Ceiling Support (SPR*CCSB)
- Reduces cold air infiltration into the dwelling
- Provides additional protection against heat from the chimney

| Size | Dimensions | Product Code | Pack |
|-----------|----------------|--------------|------|
| Universal | 2" x 12" x 48" | JUSI | 1 |

FINISHING PLATE

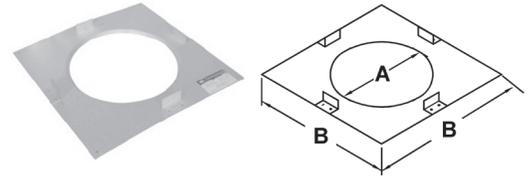


HEAVY DUTY UNIVERSAL ROOF BRACE KIT



UNIVERSAL SNOW SPLITTER




JUSI-UNIVERSAL SHIELDING INSULATION

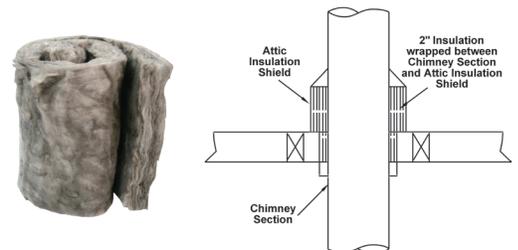

Fireplace Parts


ADAPTOR PLATE

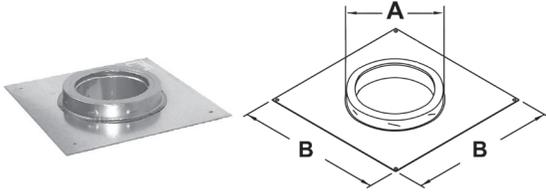

Used with specific factory-built fireplaces listed to UL 127 or CAN/ULC-S610.

| Size | A | B | Product Code | Pack |
|------|-----|---------|--------------|------|
| 5" | 7" | 11-5/8" | JSC5AP | 1 |
| 6" | 8" | 11-5/8" | JSC6AP | 1 |
| 7" | 9" | 11-5/8" | JSC7AP | 1 |
| 8" | 10" | 11-5/8" | JSC8AP | 1 |


INSULATED CHASE PLUG

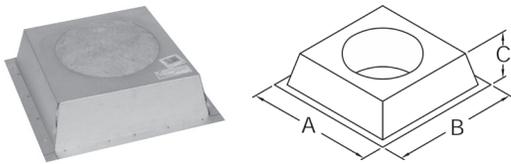

- Recommended to reduce air infiltration through the chase in cold climates.
- Maintains the thermal envelope of your home
- For use with wood-burning fireplaces certified with Model SPR chimney
- A trim plate is provided when a 6" chimney is used

| Size | A | B | C | Product Code | Pack |
|---------|-----|-----|--------|--------------|------|
| 6" & 7" | 15" | 15" | 4-1/4" | JSC7CP | 1 |


30°/45° INSULATED WALL PLUG

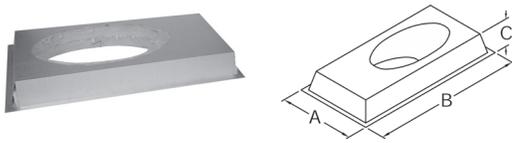

- For use where the chimney passes through a wall at a 30° & 45° angle
- Insulated to maintain the thermal envelope of your home
- For use with wood-burning fireplaces certified with Model SPR chimney
- A trim plate is provided - to be used when a 6" diameter chimney is used with 30° or 45° angle or when a 7" diameter chimney is used with 45° angle

| Size | A | B | C | Product Code | Pack |
|---------|-----|-----|--------|--------------|------|
| 6" & 7" | 15" | 15" | 4-1/4" | JSC7WC | 1 |

45° FACE PLATE

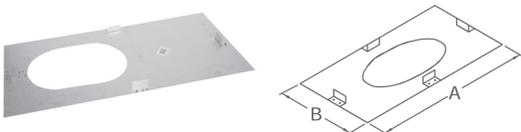

- For use where the chimney passes through a wall at a 45° angle
- For use with wood-burning fireplaces certified with Model SPR chimney

| Size | A | B | Product Code | Pack |
|------|-----|-----|--------------|------|
| 7" | 15" | 31" | JSC7WFP4 | 1 |

Support Kits

SUPERPRO HAS PUT TOGETHER 3 CHIMNEY KITS TO GET YOUR PROJECT DONE...

SuperPro has taken the guess work out of chimney installation by putting the most common parts for each installation all in one box. These 3 kits depict the most common installations. Simply decide which of these scenarios fits your need, then pick up your chimney lengths, roof flashing and elbows (if required).

When your chimney goes up through a flat ceiling, then thru the roof, you may choose the MODEL SPR DECORATOR CEILING SUPPORT INSTALLATION KIT - SPR*DCSK-N

- Deluxe Rain Cap
- Adjustable Attic Insulation Shield
- Decorator Ceiling Support
- Stove Pipe Adaptor

NOTE: For a two story application, an additional Firestop Radiation Shield must be installed.

...Now you just need your roof flashing and chimney lengths.

DECORATOR CEILING SUPPORT KIT



| Size | Product Code |
|------|--------------|
| 5" | SPR5DCSK-N |
| 6" | SPR6DCSK-N |
| 7" | SPR7DCSK-N |
| 8" | SPR8DCSK-N |

When your chimney goes out a cathedral or open beam ceiling, you may choose the MODEL SPR CATHEDRAL CEILING SUPPORT INSTALLATION KIT - SPR*CCSK

- Deluxe Rain Cap
- Cathedral Ceiling Support
- Draw Band
- Trim Kit
- Stove Pipe Adaptor

...Now you just need your roof flashing and chimney lengths

CATHEDRAL CEILING SUPPORT KIT



| Size | Product Code |
|------|--------------|
| 6" | SPR6CCSK |
| 7" | SPR7CCSK |
| 8" | SPR8CCSK |


When your chimney goes out a wall and then runs straight up, you'll need the MODEL SPR WALL SUPPORT INSTALLATION KIT - SPR*WSK

- Deluxe Rain Cap
- Wall Bands (2)
- Stove Pipe Adaptor
- Wall Thimble
- Stainless Steel Tee
- Adjustable Wall Support (WS) with Non-Twist Lock Insulated Tee Cap

...Now you just need:

- Vertical Chimney lengths
- Through the wall length (must extend at least 3" into the room)

WALL SUPPORT KIT

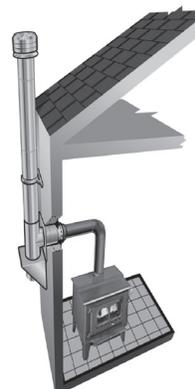

| Size | Product Code |
|------|--------------|
| 5" | SPR5WSK |
| 6" | SPR6WSK |
| 7" | SPR7WSK |
| 8" | SPR8WSK |



BUILD FOR THE FUTURE

Our Portfolio of Brands

| | |
|------------------------|--|
| AirMate | www.airmate.com |
| AmeriFlow..... | www.ameriflowregisters.com |
| Amerivent..... | www.ameri-vent.com |
| AMPCO..... | www.ampcostacks.com |
| Builder's Best | www.buildersbest.com |
| Duravent | www.duravent.com |
| Hart & Cooley..... | www.hartandcooley.com |
| Heatfab | www.heatfab.com |
| Lima..... | www.limaregister.com |
| Milcor | www.milcorinc.com |
| Portals Plus..... | www.portalsplus.com |
| RPS..... | www.rpscurbs.com |
| Security Chimneys..... | www.securitychimneys.com |
| Selkirk..... | www.selkirkcorp.com |

Corporate Headquarters

Duravent Group
28 W. Adams, Suite 1810
Detroit, MI 48226
Tel: 800.835.4429
Email: info@duraventgroup.com
www.duraventgroup.com

Contact Us

For more information about our products or to contact us directly, please go to any of our websites and click on the Contact section on the website.



duravent[™]
GROUP

BUILD FOR THE FUTURE

www.duraventgroup.com



For warranty information:
Scan this QR code or visit
www.duraventgroup.com/warranties