



Ultra-Temp[®]/Galva-Temp[®]

Chimney Catalog

FUEL TYPE: GAS | OIL | WOOD | COAL

US ONLY



TABLE OF CONTENTS

Typical Installations3-4

Technical Data Sheet5-6

Chimney Lengths7-9

Elbows and Tees 10-12

Chimney Offset Table 11

Supports 13-17

Chimney Kits 18-19

Rain Caps/Storm Collar20-21

Flashings.....22-23

Shields.....24-25

Adapters..... 26

Accessories27-29

4" HT chimney.....30-32

Typical Installations


Short or tall, large or small, there is a Selkirk Chimney System to suit every need or appliance. The following diagrams are intended as guides to proper part selection for several common chimney installations. Keep in mind that these diagrams do not show the exact details for installation of the various chimney parts. They supplement the instructions by illustrating a wider variety of complete chimney systems. While the primary emphasis in the diagrams is on solid-fuel appliances, the type of appliance originally selected must never affect the installation of the chimney.

Whether the chimney is initially connected to a gas, oil or wood-burning appliance, the parts used and clearances to combustibles are always the same. Remember that at some future time, the same chimney may serve a wood furnace, even if it started out with gas or oil.


1. Maintain the minimum 2" AIRSPACE clearance to combustibles and to any insulation except SUSI.
2. For joint security—use Locking Bands or screws for the chimney and its connector.

NOTE: The drawings shown of these installations are solely for assistance in product selection. Reference should be made to the Selkirk Chimney System installation instructions for full and exact details of a correct installation.

1. Masonry Fireplace using Selkirk Chimney

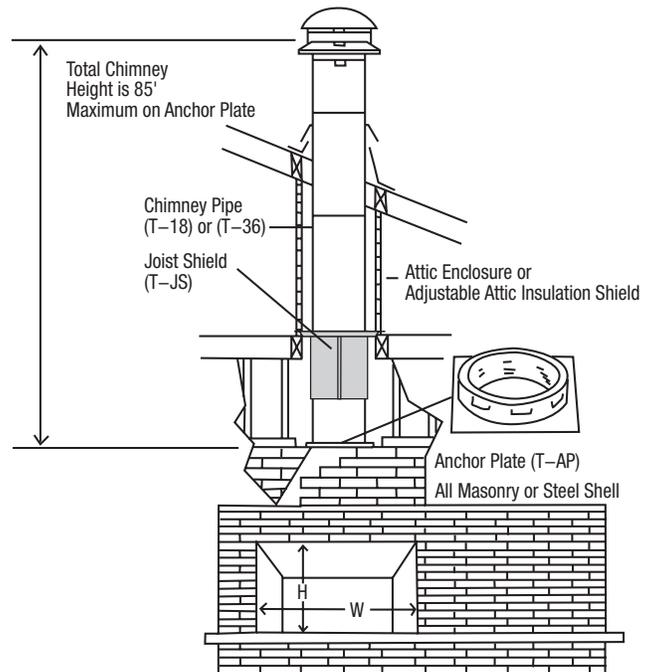


2. Basement Heater with Tee-supported outside chimney

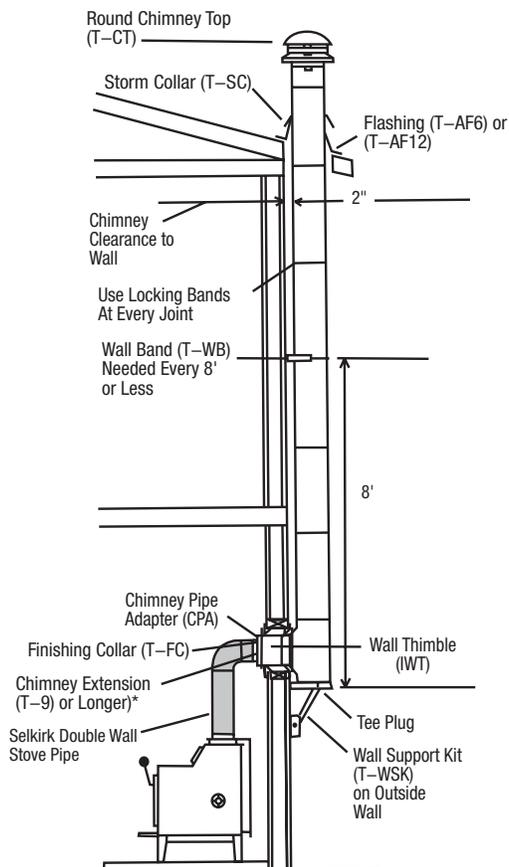


*The end of the chimney section must extend into the room a minimum of 4-1/2" beyond the face of the wall.

3. Wood Stove with chimney offset to avoid ridge

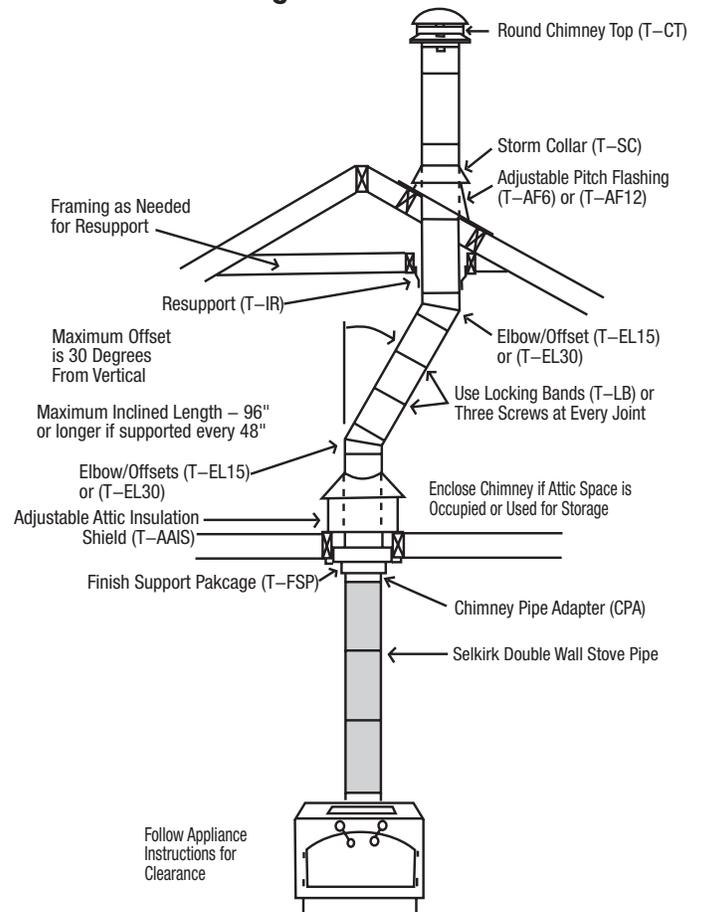


Follow Appliance Instructions for Clearance


4. Solid Fuel Appliance with a short vertical chimney

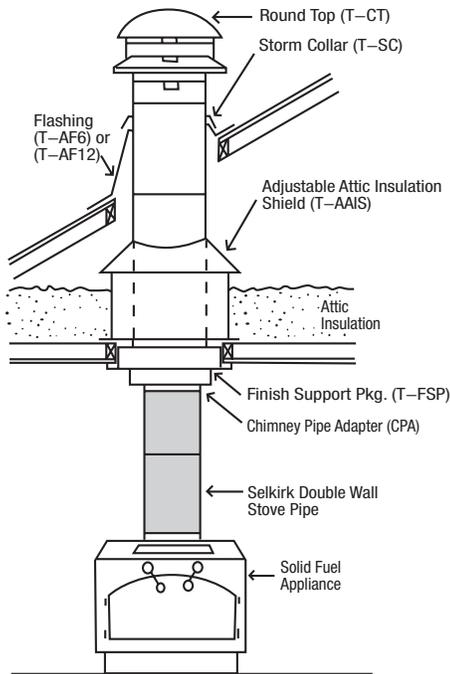


5. Combination of Furnace and Water Heater on one chimney

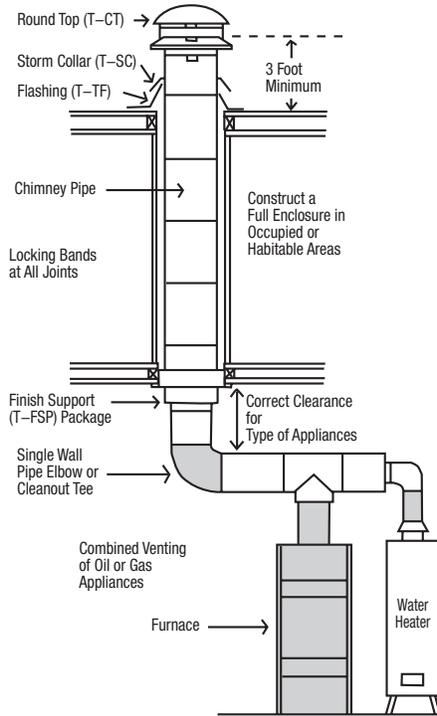

6. Wood Heater with its chimney through an upstairs enclosure

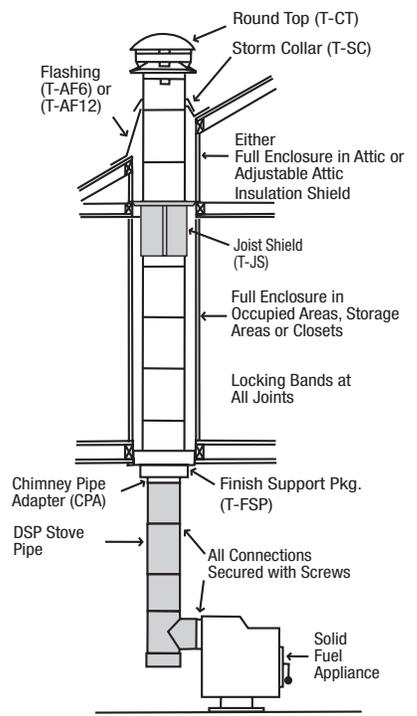


7. Pitched Roof with Attic

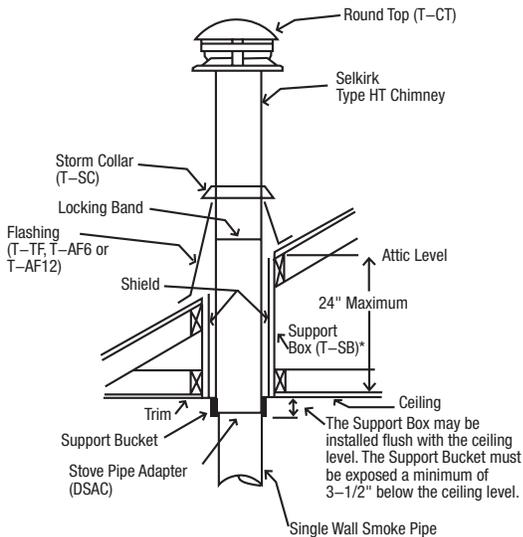

* Support Box also intended for use in mobile home and A-frame installations.

8. A-Frame with chimney on a steep pitch roof

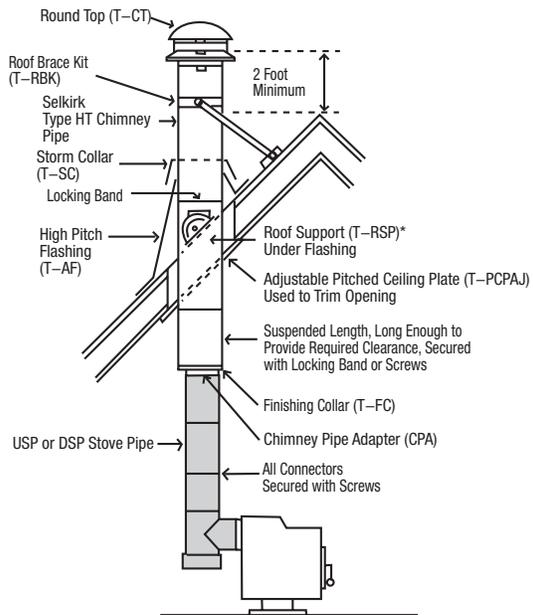

* Support Box may also be used. Please consult installation instructions for more information.

NOTE ON CHIMNEY/STOVE PIPE CONNECTIONS

These diagrams show Ultra-Temp/Galva-Temp Chimney Systems connected to Selkirk Double Wall Stove Pipe using the Chimney Pipe Adapter. Ultra-Temp/Galva-Temp Chimneys may be connected to Single-Wall Stove Pipe using the DSA, DSAC or CPA. For additional information on Selkirk Double Wall Stove Pipe go to www.selkirkcorp.com.

ULTRA-TEMP®/GALVA-TEMP® All-Fuel Chimney

TECHNICAL DATA SHEET

IMPORTANT

This catalog references ULTRA-TEMP/GALVA-TEMP Chimney Systems with maximum test temperatures under Underwriters' Laboratories Safety Standard for Factory-Built Chimneys (UL®-103).

ULTRA-TEMP® HT/GALVA-TEMP® HT

Diameter Sizes:	4" (UT), 5", 6", 7" & 8"
Part Identification:	Letter UT and GT
Clearances:	2" of airspace to Combustibles
Listing:	UL 103 Type HT
Temperature Ratings:	2100°F (Maximum Test 10 min.) 1400°F (Maximum for 60 min.) 1000°F (Maximum Continuous Operating Temperatures)



ULTRA-TEMP®/GALVA-TEMP®

Diameter Sizes:	10"
Part Identification:	Letter U and G
Clearances:	2" of airspace to Combustibles
Listing:	UL 103
Temperature Ratings:	1700°F (Maximum Test 10 min.) 1400°F (Maximum for 60 min.) 1000°F (Maximum Continuous Operating Temperatures)

The Selkirk Chimney System (SCS) is ideal for venting residential heating appliances burning wood, #2 oil, and natural and LP gas. They have been specifically designed for today's modern, high-efficiency "airtight" wood stoves. They are designed for gravity (natural draft), nonpositive internal pressure venting only. The SCS is usable on any appliance having a power burner (such as an oil furnace) if that appliance operates with neutral or negative draft at its outlet. Non-residential appliances which may cause positive pressure in the chimney should use a Selkirk Commercial Model PS or IPS system.

NOTE: See separate catalog for Canadian installation.

See separate DuraTech LDC catalog for 12" - 24" diameters.

FRAMING / SUPPORTS:

All Selkirk Supports are designed to carry four times the combined weight of each system at maximum allowable height.

FRAMING TABLE TO MAINTAIN 2" AIR SPACE CLEARANCE

CHIMNEY SIZE	4"	5"	6"	7"	8"	10"
Ceiling or Finish Support	**9" x 9"	11-1/4" x 11-1/4"	12-1/4" x 12-1/4"	13-1/4" x 13-1/4"	14-1/4" x 14-1/4"	16-1/4" x 16-1/4"
Ceiling Penetrations	10" x 10"	11" x 11"	12" x 12"	13" x 13"	14" x 14"	16" x 16"
Floor Openings	10" x 10"	11" x 11"	12" x 12"	13" x 13"	14" x 14"	16" x 16"
Roof Openings	10" x 10"	11" x 11"	12" x 12"	13" x 13"	14" x 14"	16" x 16"
Wall Openings	10" x 10"	11" x 11"	12" x 12"	13" x 13"	14" x 14"	16" x 16"

* All framing dimensions may be up to 1/2" more, but not less than the above values.
Check support dimensions before using.

** 4" chimney approved for use at clearance provided by Ceiling Support

SUPPORT TABLE MAX. HEIGHT

SUPPORT TYPE	PART NO.	SIZE	
		5", 6", 7", 8" FEET OF CHIMNEY	10" FEET OF CHIMNEY
Anchor Plate	AP	85	85
Finish Or Ceiling Support	FSP, CSP	50	50
Insulated Tee	IT	50	40
Wall Support Kit	WSK	See Sheet S-5	40
Roof Support (A)	RSP, RSK	30	30
Interior Resupport	IR	18	18
Support Box	SB	20	—

NOTE: (A) 20 feet of chimney may be suspended below a roof support with all joints securely threaded, using locking bands or screws.

Sloped ceilings and roofs will not have a square opening, but need to maintain 2".
The table only works on flat roof +/- or ceiling penetrations.

4" components support 50 feet: Ceiling Support (BCS), Wall Support (WS), Roof Support (RS) and Anchor Plate (AP).

ULTRA-TEMP®/GALVA-TEMP® All-Fuel Chimney

CHIMNEY HEIGHT ABOVE ROOF

Requirement #1: The chimney must extend not less than 3ft. above the highest point at which the chimney comes in contact with the roof

Requirement #2: The chimney must extend not less than 2ft. above the highest roof surface or structure within a horizontal distance of 10ft.

CHIMNEY HEIGHT CHART TO MEET THE 3, 2, 10 FOOT RULE ABOVE THE ROOF

DISTANCE FROM PEAK	PITCH OF ROOF											
	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
	CHIMNEY HEIGHT ABOVE ROOF (INCHES)											
10'	36	44	54	64	74	84	94	104	114	124	134	144
9'	36	42	51	60	69	78	87	96	105	114	123	132
8'	36	40	48	56	64	72	80	88	96	104	112	120
7'	36	38	45	52	59	66	73	80	87	94	101	108
6'	36	36	42	48	54	60	66	72	78	84	90	96
5'	36	36	39	44	49	54	59	64	69	74	79	84
4'	36	36	36	40	44	48	52	56	60	64	68	72
3'	36	36	36	36	39	42	45	48	51	54	57	60
2'	36	36	36	36	36	36	38	40	42	44	46	48
1'	36	36	36	36	36	36	36	36	36	36	36	36


Step 1 = Multiply the upper part from the pitch of roof by the # of feet away from the peak

Step 2 = Add 24" to your calculation to meet requirement #2

Step 3 = Height of chimney required to extend above the roof line

*Measurements in Blue highlights have been moved to 36" to meet requirement #1

The chimney must extend at least three feet above the highest point where it passes through the roof surface and at least two feet higher than any part of the building within a horizontal distance of ten feet.

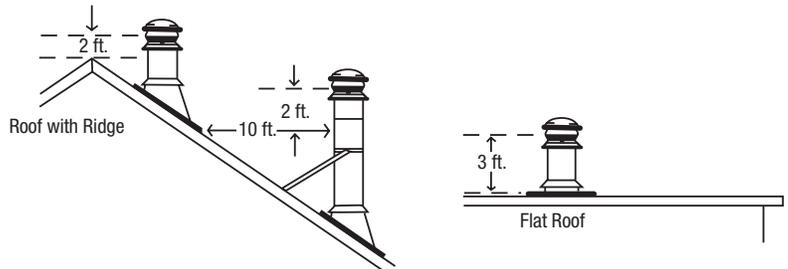

CHIMNEY PARTS GUIDE


The following section offers pictorial references, specifications and a brief description of major components to aid in the design of an Ultra-Temp - Type HT, Galva-Temp - Type HT, Ultra-Temp and Galva-Temp Chimney System. Galva-Temp is for interior application or enclosed (chase).



Chimney Lengths

- Stainless steel inner and outer pipe.
- All insulated pipe lengths are furnished with a Locking Band.
- Secure twist-lock design couples chimney sections together with just a 1/8 turn.
- To calculate installed length, subtract 1-1/4" per joint.
- Insulated chimney requires 2" clearance to combustible material.
- Ultra-Temp and Galva-Temp can be combined to make a complete and cost effective installation.

INSULATED LENGTHS ULTRA-TEMP

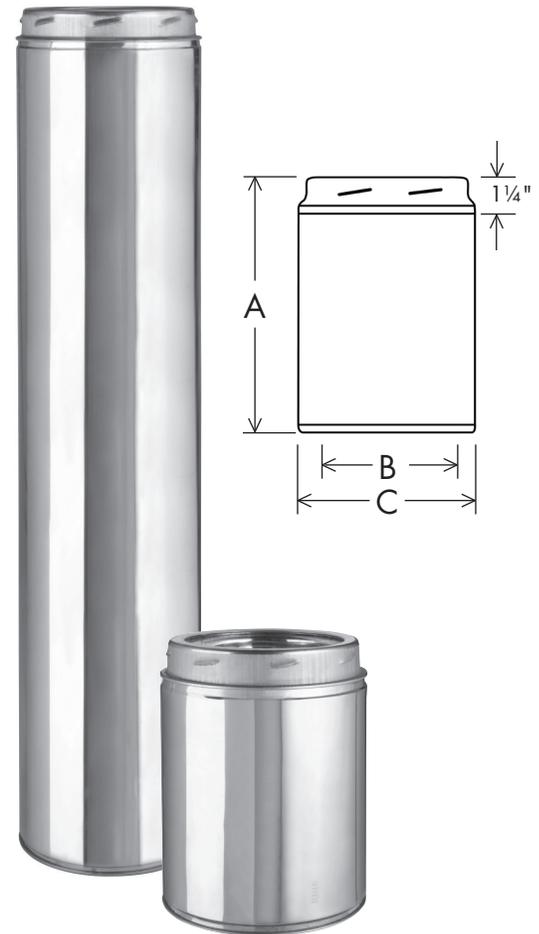

ULTRA-TEMP - TYPE HT


Size	A	B	C	Product No.	Part No.	Pack
5"	6"	5"	7"	205006U	5UT-6	1
	9"	5"	7"	205009U	5UT-9	1
	12"	5"	7"	205012U	5UT-12	1
	18"	5"	7"	205018U	5UT-18	1
	36"	5"	7"	205036U	5UT-36	1
6"	6"	6"	8"	206006U	6UT-6	1
	9"	6"	8"	206009U	6UT-9	1
	12"	6"	8"	206012U	6UT-12	1
	18"	6"	8"	206018U	6UT-18	1
	24"	6"	8"	206024U	6UT-24	1
	36"	6"	8"	206036U	6UT-36	1
	48"	6"	8"	206148U	6UT-48	1
7"	6"	7"	9"	207006U	7UT-6	1
	9"	7"	9"	207009U	7UT-9	1
	12"	7"	9"	207012U	7UT-12	1
	18"	7"	9"	207018U	7UT-18	1
	24"	7"	9"	207024U	7UT-24	1
	36"	7"	9"	207036U	7UT-36	1
8"	6"	8"	10"	208006U	8UT-6	1
	9"	8"	10"	208009U	8UT-9	1
	12"	8"	10"	208012U	8UT-12	1
	18"	8"	10"	208018U	8UT-18	1
	24"	8"	10"	208024U	8UT-24	1
	36"	8"	10"	208036U	8UT-36	1
	48"	8"	10"	208148U	8UT-48	1

ULTRA-TEMP

Size	A	B	C	Product No.	Part No.	Pack
10"	6"	10"	12"	210006U	10UT-6	1
	9"	10"	12"	210009U	10UT-9	1
	12"	10"	12"	210012U	10UT-12	1
	18"	10"	12"	210018U	10UT-18	1
	24"	10"	12"	210024U	10UT-24	1
	36"	10"	12"	210036U	10UT-36	1

Chimney Lengths

INSULATED LENGTHS GALVA-TEMP

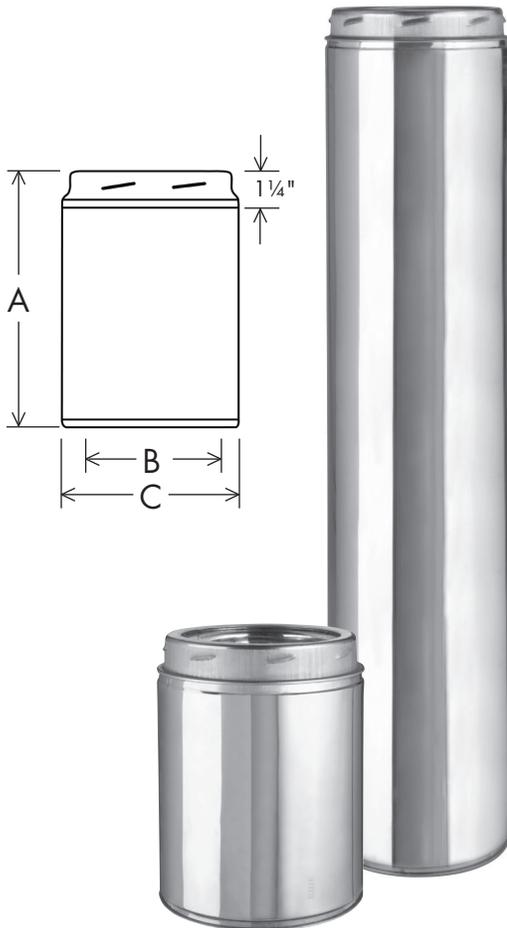

- Stainless steel inner and galvanized outer pipe.
- All insulated pipe lengths are furnished with a Locking Band.
- Secure twist-lock design couples chimney sections together with just a 1/8 turn.
- To calculate installed length, subtract 1-1/4" per joint.
- Insulated chimney requires 2" clearance to combustible material.
- Galva-Temp and Ultra-Temp can be combined to make a complete and cost effective installation.

GALVA-TEMP - TYPE HT

Size	A	B	C	Product No.	Part No.	Pack
6"	6"	6"	8"	206006G	6GT-6	1
	9"	6"	8"	206009G	6GT-9	1
	18"	6"	8"	206018G	6GT-18	1
	36"	6"	8"	206036G	6GT-36	1
	48"	6"	8"	206148G	6GT-48	1
7"	6"	7"	9"	207006G	7GT-6	1
	9"	7"	9"	207009G	7GT-9	1
	18"	7"	9"	207018G	7GT-18	1
	36"	7"	9"	207036G	7GT-36	1
	48"	7"	9"	207148G	7GT-48	1
8"	6"	8"	10"	208006G	8GT-6	1
	9"	8"	10"	208009G	8GT-9	1
	18"	8"	10"	208018G	8GT-18	1
	36"	8"	10"	208036G	8GT-36	1
	48"	8"	10"	208148G	8GT-48	1

GALVA-TEMP


Size	A	B	C	Product No.	Part No.	Pack
10"	12"	10"	12"	210012G	10GT-12	1
	18"	10"	12"	210018G	10GT-18	1
	24"	10"	12"	210024G	10GT-24	1
	36"	10"	12"	210036G	10GT-36	1

Chimney Lengths *continued*

- Overall length of 12".
- Adjustable from 2" to 9-1/2".
- Used in offset applications.
- Supplied with Locking Band.

Size	A	Product No.	Part No.	Pack
5"	12"	205011U	5UT-11AJ	1
6"	12"	206011U	6UT-11AJ	1
7"	12"	207011U	7UT-11AJ	1
8"	12"	208011U	8UT-11AJ	1

ULTRA-TEMP ADJUSTABLE LENGTH

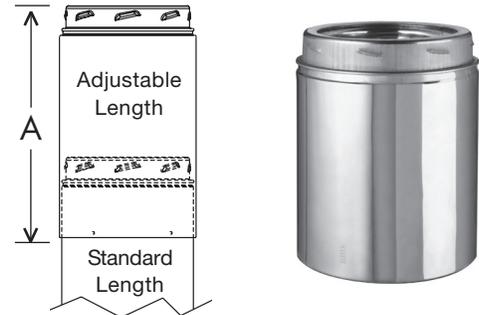


NOTE: Adjustable lengths must be installed above a fixed length - they cannot be installed immediately above a support, tee or elbow.

- Versatile, simple device for increasing stability of a chimney.
- Inward flanges around the band fit into grooves at chimney length joints.
- Reinforces joints of chimney and prevents accidental uncoupling.
- Locking Band is included with all insulated lengths, tees and elbow kits.
- Made of stainless steel.

Size	A	B	Product No.	Part No.	Pack
5"	7"	7/16"	205450	5T-LB	4
6"	8"	7/16"	206450	6T-LB	4
7"	9"	7/16"	207450	7T-LB	4
8"	10"	7/16"	208450	8T-LB	4
10"	12"	7/16"	210450	10S-LB	4

LOCKING BANDS

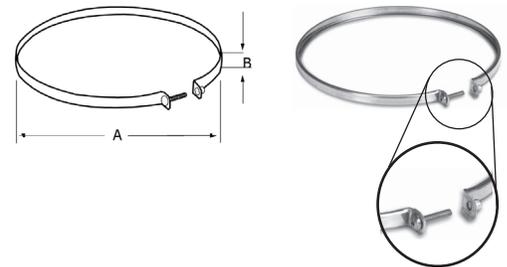

- **Kits Include:** 2 Elbows, 2 Locking Bands and Interior Resupport in one box.
- **REQUIRED:** Locking bands (two packaged with each elbow kit) allow 360 degree rotation and lock the components together at the exact offset required. Elbows can be used on the same two-inch air space clearance as chimney sections.
- The first vertical length of chimney above an offset should be resupported, using an Interior Resupport Assembly securely clamped to the pipe just below a Locking Band, with its straps nailed to a nearby structure.


Note: For additional information see Installation Instructions or visit www.selkirkcorp.com

ELBOW KITS



Elbows and Tees

15° INSULATED ELBOW KIT

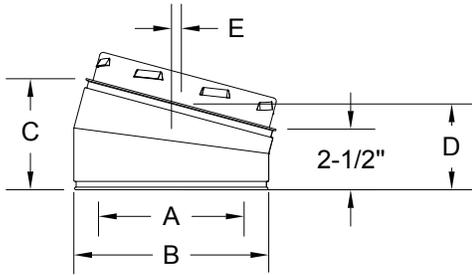


ULTRA-TEMP

Size (A)	B	C	D	E	Product No.	Part No.	Pack
5"	7"	4-5/16"	3-7/16"	3/8"	205206	5T-EL 15 KIT	1
6"	8"	4-9/16"	3-9/16"	3/8"	206206	6T-EL 15 KIT	1
7"	9"	4-7/8"	3-11/16"	7/16"	207206	7T-EL 15 KIT	1
8"	10"	5-1/8"	3-3/4"	7/16"	208206	8T-EL 15 KIT	1
10"	12"	5-5/8"	4-1/16"	1/2"	210206	10S-EL 15 KIT	1

GALVA-TEMP

Size	A	B	Product No.	Part No.	Pack
6"	11-5/8"	3-1/16"	206206G	6GT-EL 15 KIT	1
7"	12-1/2"	3-3/16"	207206G	7GT-EL 15 KIT	1
8"	12-5/8"	3-5/16"	208206G	8GT-EL 15 KIT	1

30° INSULATED ELBOW KIT

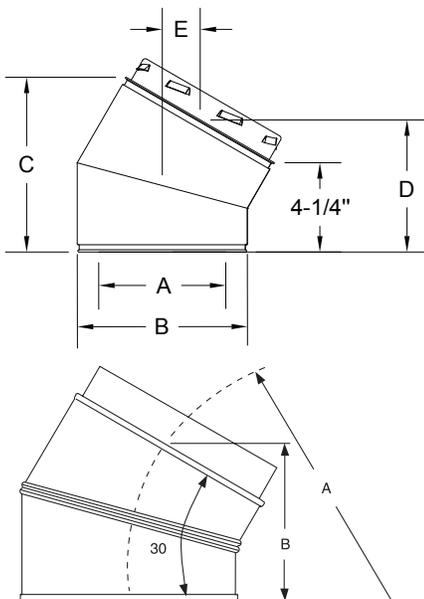

ULTRA-TEMP

Size (A)	B	C	D	E	Product No.	Part No.	Pack
5"	7"	8"	6-1/4"	1-3/4"	205211	5T-EL 30 KIT	1
6"	8"	8-1/4"	6-1/4"	1-3/4"	206211	6T-EL 30 KIT	1
7"	9"	9-1/4"	7"	2"	207211	7T-EL 30 KIT	1
8"	10"	10"	7-3/8"	2-1/8"	208211	8T-EL 30 KIT	1
10"	12"	10"	7"	2"	210211	10S-EL 30 KIT	1


GALVA-TEMP

Size	A	B	Product No.	Part No.	Pack
6"	12-1/2"	6-1/4"	206211G	6GT-EL 30 KIT	1
7"	13-3/4"	7"	207211G	7GT-EL 30 KIT	1
8"	14-3/4"	7-3/8"	208211G	8GT-EL 30 KIT	1
10"	13-5/8"	7"	210211G	10G-EL 30 KIT	1

Elbows and Tees continued

Chimney Offset Table

Part No.	2 Elbows w/o Pipe		2 Elbows + 6" Section		2 Elbows + 9" Section		2 Elbows + 12" Section		2 Elbows + 18" Section		2 Elbows + 24" Section		2 Elbows + 36" Section		2 Elbows + 48" Section	
	O	H	O	H	O	H	O	H	O	H	O	H	O	H	O	H
5GT/UT - 15°	7/8"	6-13/16"	2-1/16"	1-1/8"	2-3/16"	14"	3-9/16"	17"	5-1/8"	22-3/4"	6-11/16"	28-1/2"	9-13/16"	40-1/8"	N/A	N/A
6GT/UT - 15°	15/16"	7-1/16"	2-1/8"	11-3/8"	2-7/8"	14-1/4"	3-5/8"	17-1/4"	5-3/16"	23"	6-3/4"	28-3/4"	9-7/8"	40-3/8"	13"	52"
7GT/UT - 15°	1"	7-5/16"	2-1/8"	11-11/16"	2-5/16"	14-9/16"	3-11/16"	17-7/16"	5-1/4"	23-1/4"	6-13/16"	29-1/16"	9-7/8"	40-5/8"	13"	52-1/4"
8GT/UT - 15°	1"	7-9/16"	2-3/16"	11-15/16"	2-15/16"	14-13/16"	3-11/16"	17-11/16"	5-1/4"	23-1/2"	6-13/16"	29-5/16"	9-15/16"	40-7/8"	13-1/16"	52-1/2"
5GT/UT - 30°	3-3/8"	12-9/16"	4-9/16"	16-7/8"	5-5/16"	19-3/4"	6-1/16"	22-3/4"	7-5/8"	28-1/2"	9-3/16"	34-1/4"	12-5/16"	45-7/8"	N/A	N/A
6GT/UT - 30°	3-3/8"	12-9/16"	4-9/16"	16-7/8"	5-5/16"	19-3/4"	6-1/16"	22-3/4"	7-5/8"	28-1/2"	9-3/16"	34-1/4"	12-5/16"	45-7/8"	15-7/16"	57-1/2"
7GT/UT - 30°	3-3/4"	14-1/16"	4-15/16"	18-7/16"	5-11/16"	21-5/16"	6-7/16"	24-3/16"	8"	30"	9-9/16"	35-13/16"	12-11/16"	47-3/8"	15-13/16"	59"
8GT/UT - 30°	4"	14-13/16"	5-1/8"	19-3/16"	5-15/16"	22-1/16"	6-11/16"	24-15/16"	8-1/4"	30-3/4"	9-13/16"	36-9/16"	12-7/8"	48-1/8"	16"	59-3/4"
10GT/UT - 15°	1-1/16"	8-1/8"	2-1/4"	12-1/2"	3"	15-3/8"	3-3/4"	18-1/4"	5-5/16"	24-1/16"	6-7/8"	29-7/8"	10"	41-7/16"	N/A	N/A
10GT/UT - 30°	3-3/4"	14"	4-15/16"	18-3/8"	5-11/16"	21-1/4"	6-7/16"	24-1/8"	8"	29-15/16"	9-9/16"	35-3/4"	12-11/16"	47-5/16"	N/A	N/A

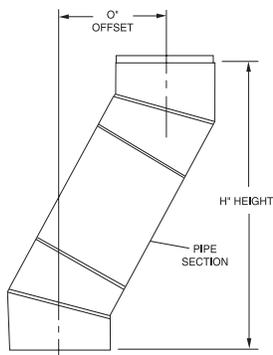


O = Offset; H = Height

NOTE: O = Offset; H = Height

All dimensions and indicated lengths assume a 1.25" overlap... 5" through 10"; 15 degree elbows are new 2 gore design.

INSULATED TEE AND PLUG

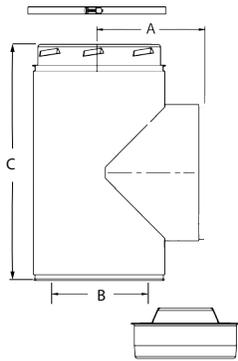

- Allows the horizontal connection of the chimney to the appliance.
- Can be used on the interior or exterior of the building, in combination with a Wall Support Assembly.
- The Tee Cap provided allows access for inspection and cleaning.
- Includes Locking Band.

STAINLESS INSULATED TEE WITH INSULATED TEE PLUG - TYPE HT

Size	A	B	C	Product No.	Part No.	Pack
5"	6-3/8"	5-1/16"	13-7/8"	205100	5T-HT	1
6"	6-1/2"	6-1/16"	14-1/8"	206100	6T-HT	1
7"	7"	7-1/16"	15-1/8"	207100	7T-HT	1
8"	7-1/2"	8-1/16"	16-1/8"	208100	8T-HT	1


STAINLESS INSULATED TEE WITH INSULATED TEE PLUG

Size	A	B	C	Product No.	Part No.	Pack
10"	8-1/2"	10-1/16"	18-1/8"	210100	10S-HT	1

GALVANIZED INSULATED TEE W/INSULATED TEE PLUG - TYPE HT

Size	A	B	C	Product No.	Part No.	Pack
6"	6-3/8"	6-3/8"	12-3/4"	206100G	6GT-HT	1
7"	6-7/8"	6-7/8"	13-3/4"	207100G	7GT-HT	1
8"	7-3/8"	7-3/8"	14-3/4"	208100G	8GT-HT	1

INSULATED TEE PLUG

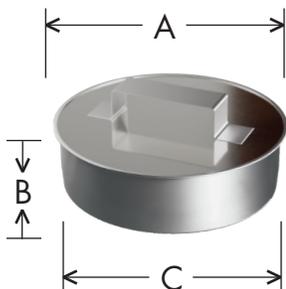

- Removable to provide easy access for chimney maintenance and inspection.
- Insulated to help maintain flue gas temperature.

Size	A	B	C	Product Code	Part No.	Pack
5"	5-3/8"	2"	4-15/16"	205102	5T-IP	1
6"	6-3/8"	2"	5-15/16"	206102	6T-IP	1
7"	7-3/8"	2"	6-15/16"	207102	7T-IP	1
8"	8-3/8"	2"	7-15/16"	208102	8T-IP	1
10"	10-3/8"	2"	9-15/16"	210102	10S-IP	1

Supports

- An ideal support assembly for open cathedral ceiling installations. Fits all roof pitches and requires only simple framing. Mounts easily on to top of roof through opening that allows 2" clearance. Maximum length of chimney which can be suspended below is 20' supported. Maximum total length is 30'.
- The Roof Support Package (RSP) contains one 18" length of pipe, roof brackets and necessary hardware.
- The roof brackets and hardware may be purchased without the pipe section by ordering a Roof Support Kit (RSK).
- The brackets may be assembled to any standard pipe length at any desired height. Locking bands must be used at each pipe joint when installing either the RSP or RSK.

ULTRA-TEMP

Size	A	B	Framing	Product No.	Part No.	Pack
5"	5"	7"	11" x t"	205420	5T-RSP	1
6"	6"	8"	12" x t"	206420	6T-RSP	1
7"	7"	9"	13" x t"	207420	7T-RSP	1
8"	8"	10"	14" x t"	208420	8T-RSP	1
10"	10"	12"	16" x t"	210420	10S-RSP	1

For 6" - 10" Galva-Temp Chimney use Ultra-Temp Roof Support Package or RSK Roof Support Kit.

ROOF SUPPORT KIT

Brackets and mounting hardware only

- May be attached to any standard pipe length.

200420 RSK (works on all diameters)


- This new design gives you the flexibility of securing the 5", 6", 7" or 8" diameter chimney with a heavy duty band. The band allows you to slide the installed length vertically to properly position this section in the system. Installation requirements are the same as our standard RSP. The URSA can hold 30' of pipe total – up to 20' can be below.

UNIVERSAL ROOF SUPPORT ASSEMBLY - 5"- 8" DIA. PIPE

A	B	C	Product No.	Part No.	Pack
8"	Adjustable 7"-10"	5-3/4"	200250	URSA	1

Brackets and mounting hardware with band


ROOF SUPPORT PACKAGE

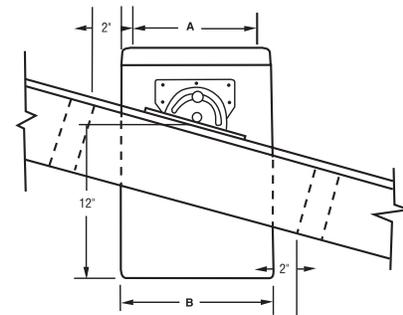

Note: *"t" varies with slope.



UNIVERSAL ROOF SUPPORT ASSEMBLY

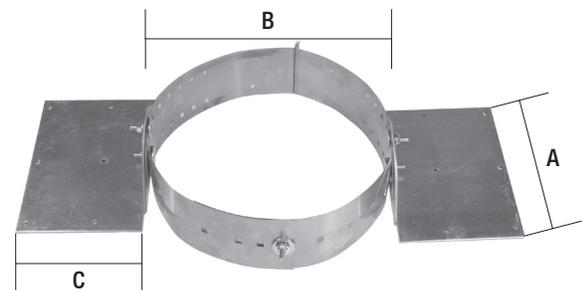


HEAVY DUTY UNIVERSAL ROOF BRACE KIT



- The Universal Roof Brace Kit is designed to provide extra stability for the chimney system above roof line, and is required when the chimney extends 5 feet or more above the roof.
- One kit should be used for every 5' of chimney.
- Includes telescoping legs that adjust from 5'-9' and a support band that adjusts to fit chimneys from 5" to 8" ID.

Size	Product No.	Part No.	Pack
5" to 8" ID	0843900	HDRBK	1

ROOF BRACE KIT

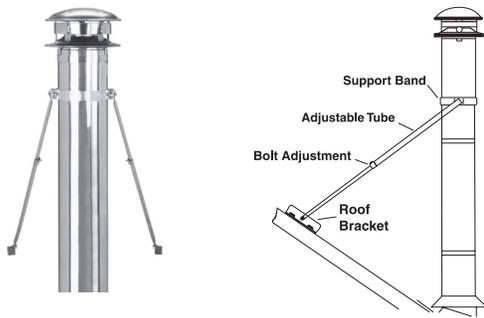


- A Roof Brace Kit can be used whenever there is a need to stabilize the chimney above the roof level. The Roof Brace Kit should be used at a midpoint on the chimney. Braces adjust from 4' to 7-1/2'.

ROOF BRACE KITS REQUIREMENTS

up to 4'	None
5' to 10'	1
over 10'	1 every 5'

Size	Product No.	Part No.	Pack
6"	206440	6T-RBK	1
7"	207440	7T-RBK	1
8"	208440	8T-RBK	1

WALL SUPPORT KIT - Now Supports 60 Vertical Feet at 2" from Wall

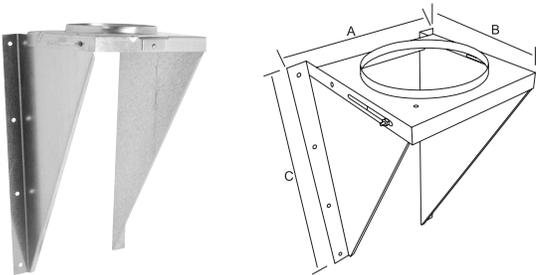

NOTE: Will allow for an adjustment of 2" to 6" from a vertical wall.

- The Type HT Wall Support Kit has been tested for use fully enclosed and has been designed in 5", 6", 7" and 8" sizes to carry up to 60' of height. The capacity of the 10" is 40' of chimney.
- The Wall Support is intended for use with the Insulated Tee as an interior or exterior support where the chimney has a lateral connection. It is also useful where the pipe connection passes through a combustible interior or exterior wall.
- Braces may be fastened to the wall either above or below the plate for chimneys which penetrate through the wall.

Size	A	B	C	Product No.	Part No.	Pack
5"	9-1/4"	10-5/8"	18-7/8"	205430	5T-WSK	1
6"	9-1/4"	10-5/8"	18-7/8"	206430	6T-WSK	1
7"	10-1/4"	11-5/8"	20-1/2"	207430	7T-WSK	1
8"	11-1/4"	12-5/8"	21-7/8"	208430	8T-WSK	1
10"	16"	14-5/8"	25-1/4"	210430	10S-WSK	1

Supports continued

- Designed to support up to 29' of ULTRA-TEMP Chimney in an installation above the tee or above an offset. It can also serve as an intermediate support.
- This universal design will work on 5", 6", 7" and 8" diameters.

Size	Product No.	Part No.	Pack
5", 6", 7", 8"	200260	UWRSA	1

VERTICAL SUPPORT CHART	
Diameter	Height of Support
5"	29'
6"	28'
7"	25'
8"	20'

- Designed to support a vertical installation above the insulated tee, the Universal Extended Wall Support can support up to 28 feet of chimney.
- It adjusts up to 12" from the vertical wall and can pass by a 12" overhang.

Size	A	B	C	Product No.	Part No.	Pack
6"-8"	22"	5"	8"-10"	0805900	UEWS	1


- Required to support offset at the immediate section of chimney above the upper elbow of an offset.
- Supports 18'.
- Straps are 17.5" in length.

Size	Product No.	Part No.	Pack
5"	205435	5T-IR	1
6"	206435	6T-IR	1
7"	207435	7T-IR	1
8"	208435	8T-IR	1
10"	210435	10S-IR	1


- Incorporates the flexibility to work on 5", 6", 7" and 8" diameters and is an excellent method for resupporting chimney systems that have offsets or vertical runs that require additional support (up to 18').
- Straps measure 18".

Size	Product No.	Part No.	Pack
5"- 8" Dia. Pipe	200230	UIRA	1


UNIVERSAL WALL SUPPORT / RESUPPORT ASSEMBLY

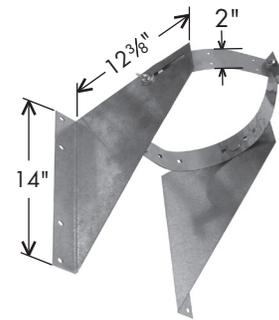

UNIVERSAL EXTENDED WALL SUPPORT

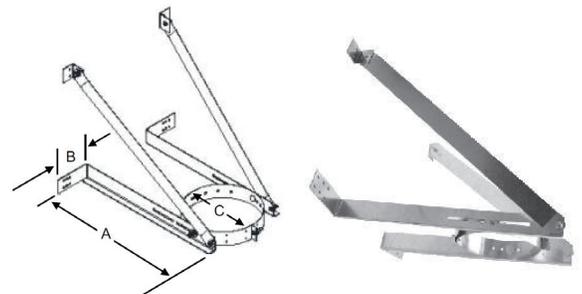

INTERIOR RESUPPORT

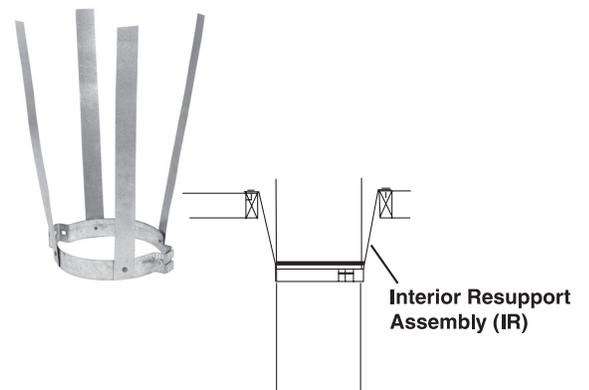

UNIVERSAL INTERIOR RESUPPORT



TEE CAP RETAINER



- The Universal Tee Cap Retainer secures the tee cap on the bottom side of an Insulated Tee.
- It can adjust to fit all chimneys ranging from 5"-8" in diameter. Required when Insulated Tee is suspended below a Universal Wall Support or Universal Extended Wall Support.

Size	Product No.	Part No.	Pack
5" to 8"	2002530	UTCR	1

CEILING SUPPORTS



- The Finish Support Package (FSP) is available with a square trim plate in 6", 7" and 8" sizes.
- The FSPR has a round trim plate and is available in a 5", 6" or 8" size.
- The Ceiling Support (CSP) in 10" size is unpainted and comes with a square trim plate only.
- With proper framing, all ceiling supports assure at least 2" minimum clearance to combustibles at the support level and can carry up to 50' of vertical chimney height.

ROUND CEILING SUPPORT

O.D.	Framing Dimensions	Round Plate Dimensions	From Ceiling	Product No.	Part No.	Pack
Dim "A"	Dim "B"	Dim "C"	Dim "D"			
5-1/4"	11-1/4" x 11-1/4"	17"	3-1/2"	205411	5T-CSPR	1
6-1/4"	12-1/4" x 12-1/4"	19"	3-1/2"	206411	6T-FSPR	1
8-1/4"	14-1/4" x 14-1/4"	22"	3-1/2"	208411	8T-FSPR	1

SQUARE CEILING SUPPORT


O.D.	Framing Dimensions	Square Plate Dimensions	From Ceiling	Product No.	Part No.	Pack
Dim "A"	Dim "B"	Dim "C"	Dim "D"			
6-1/4"	12-1/4" x 12-1/4"	14-1/4"	3-1/2"	206410	6T-FSP	1
7-1/4"	13-1/4" x 13-1/4"	15-1/4"	3-1/2"	207410	7T-FSP	1
8-1/4"	14-1/4" x 14-1/4"	16-1/4"	3-1/2"	208410	8T-FSP	1
10-1/4"	16-1/4" x 16-1/4"	18-1/4"	3-1/2"	210415	10S-CSP	1

Supports continued

- The Anchor Plate provides a secure attachment for the chimney to smoke chamber outlet on masonry fireplaces, reducing footing loads and speeding construction.
- The Anchor Plate can be used for adapting the UT Chimney to a "Listed" Factory-Built fireplace certified for use with model UT. Follow the installation instructions accompanying the fireplace.
- Stainless steel and heavy gauge steel construction for long life.
- Retains chimney with a twist-lock connection.
- Supports up to 85'.

A	B	Product No.	Part No.	Pack
6"	9-1/4"	206400	6T-AP	1
7"	10-1/4"	207400	7T-AP	1
8"	11-1/4"	208400	8T-AP	1
10"	13-1/4"	210400	10S-AP	1


ANCHOR PLATE

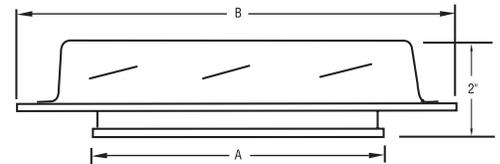

- Now when installing Selkirk's 10" diameter chimney on a masonry fireplace, you can use our new Anchor Plate with an easy operating, built-in damper. Also includes a 6' rope wire for easy operation of damper.

Dia.	A	B	C	Product No.	Part No.	Pack
10"	16"	16"	5-1/8"	210404	10S-APD	1

ANCHOR PLATE WITH DAMPER (10" DIA.)

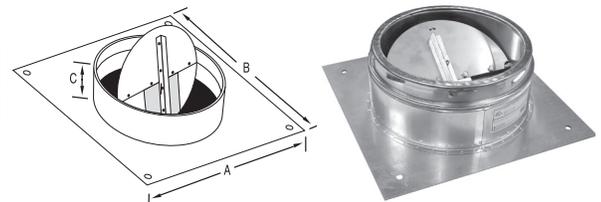


- The Support Box is intended for use when installing chimney in an A-frame, in a mobile home, in an unfinished ceiling, or in a ceiling under a narrow section of roof.
- It provides a finished installation at the ceiling level and will support up to 20' of 6", 7" or 8" diameter chimney.
- The part also provides shielding from insulation when installed in an unoccupied attic space.
- The Support Box assembly is comprised of a black box designed for installation inside 16" O.C. joists, a cylindrical shield, support bucket, ceiling trim and four screws.

Size	A	B	C	D	Product No.	Part No.	Pack
6"	6-1/4"	24"	14-1/4"	10"	206424	6T-SB	1
7"	7-1/4"	24"	14-1/4"	11"	207424	7T-SB	1
8"	8-1/4"	24"	14-1/4"	12"	208424	8T-SB	1

SUPPORT BOX / CATHEDRAL CEILING / MOBILE HOME SUPPORT



Black Matte Finish

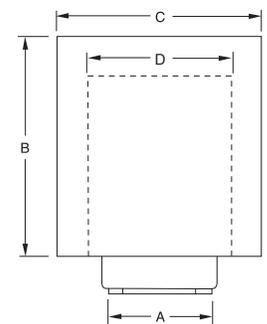

Note: Add SUSL to this part for increased performance and safety. (See Pg. 25)

Chimney Kits

ROOF TERMINATION KIT (RTK)




- Includes the basic components for a standard installation. Contents: CT, AF-6 & SC.

Size	Product No.	Part No.	Description	Pack
6"	206600	6T-RTK	Roof Termination Kit (2/12 - 6/12)	1
8"	208600	8T-RTK	Roof Termination Kit (2/12 - 6/12)	1

Ultra-Temp HT Chimney Kits

Three basic Chimney Kits designed around one of the standard support systems. Select the kit that is right for your installation along with the required insulated pipe sections and you'll have what you need to complete most installations.

FLAT CEILING SUPPORT KIT (FCK-N)

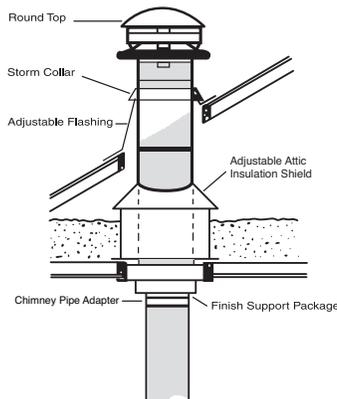

- Provides the support package and termination parts for a chimney that is supported by a flat ceiling and passes through an attic area and penetrates a 2/12 to 6/12 pitch roof. Just add Pipe Lengths and the Flat Ceiling Support Kit (FCK-N) has all necessary parts for complete installation.
- Depending upon your roof design and the position of your chimney on the roof, it may be necessary to install a Roof Brace Kit to provide required stability for your chimney above the roof.
- An Adjustable Attic Insulation Shield is a required part of the installation even if you have no insulation in the area where your chimney passes through the attic. The only exception to this AAIS installation is if you install a full enclosure around the chimney in the attic area at the minimum two inch clearance.

Contents:

- Round Top **CT**
- Adjustable Attic Insulation Shield **AAIS**
- Storm Collar **SC**
- Finish Support Pkg. **FSP**
- Adjustable Flashing **AF-6**
- Chimney Pipe Adapter **CPA**

Size	Product No.	Part No.	Description	Pack
6"	206493	6T-FCK-N	Flat Ceiling Support Kit	1
8"	208493	8T-FCK-N	Flat Ceiling Support Kit	1

Chimney Kits *continued*


- For installation of a chimney in a cathedral or pitched ceiling such as standard A-Frame construction.
- The Pitched Ceiling Support Kit provides all necessary parts for a complete installation with the exception of the required Insulated Pipe Lengths and Adjustable Flashing (AF). Selection of the Adjustable Flashing is determined by the pitch of your roof as explained on page 6.
- In calculating the number of insulated Pipe Lengths your chimney run requires, note that the Roof Support Package (RSP) comes with one 18" pipe length as part of the support.
- Depending on the height of pipe above the roof, a Roof Brace Kit may be required. See page 14.

Size	Product No.	Part No.	Description	Pack
6"	206494	6T-PCK-N	Pitched Ceiling Support Kit	1
8"	208494	8T-PCK-N	Pitched Ceiling Support Kit	1

Contents:
 Round Top
 Storm Collar
 Finishing Collar
 Roof Support Pkg.
 Adj. Pitched Ceiling Plate
 Chimney Pipe Adapter

CT
SC
FC
RSP
PCPAJ
CPA

PITCHED CEILING SUPPORT KIT (PCK-N)

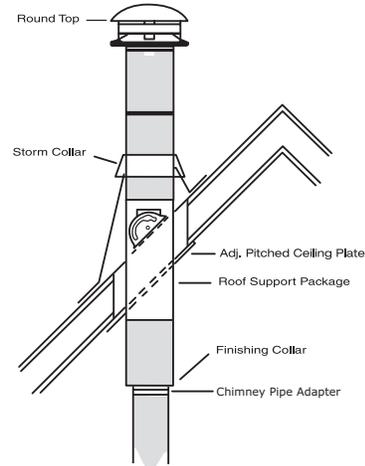


- For a wall-supported chimney system with a horizontal connector passing through an exterior wall, connecting to a Tee and running vertically up the exterior wall to termination above the roof line. The Thru-the-Wall Support Kit provides all necessary parts for a complete installation with the exception of required Insulated Pipe Lengths to reach your desired chimney height.
- One Wall Band (WB) is included in the kit. Additional Wall Bands could be required if your vertical chimney run is more than 16 feet high. In the event that your vertical chimney run penetrates the roof eave, your installation could also require an Adjustable Flashing (AF) and Storm Collar (SC).
- Depending on the height of pipe above the roof, a Roof Brace Kit may be required. See page 14.

Size	Product No.	Part No.	Description	Pack
6"	206495	6T-TWK-N	Thru-the-Wall Support Kit	1
8"	208495	8T-TWK-N	Thru-the-Wall Support Kit	1

Contents:
 Round Top
 12" Insulated Pipe Length
 Wall Band
 Insulated Tee/Plug
 Finishing Collar
 Wall Support Kit
 Chimney Pipe Adapter
 Insulated Wall Thimble

CT
T-12
WB
IT
FC
WSK
CPA
IWT

THRU-THE-WALL SUPPORT KIT (TWK)

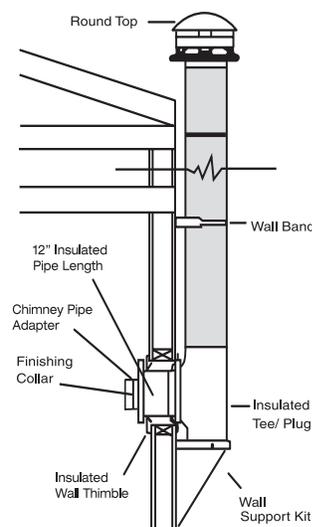


USE SELKIRK STOVE PIPE FOR OPTIMUM SYSTEM PERFORMANCE


Rain Caps/Storm Collar

ROUND TOP

ULTRA-TEMP Type HT




5" - 8"

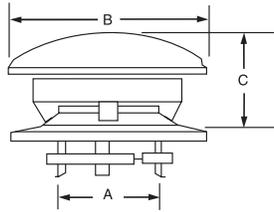

ULTRA-TEMP




10"

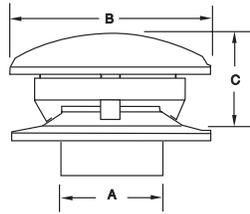

- Part of the chimney system roof assembly, the Round Top is designed with a dome to exclude rain and leaves and a lower skirt to deflect wind for proper chimney draft.
- In the Type HT Chimney (5", 6", 7" and 8" sizes), the Round Top is designed with three legs that slide down over the outside of the chimney. A cinch band is then positioned over the legs and tightened to hold the top firmly in place. This design makes cap removal for cleaning a breeze.
- In the ULTRA-TEMP and GALVA-TEMP chimney (10"), the Round Top is designed with a squeeze collar that fits inside the chimney pipe. The squeeze collar expands as a set screw is tightened to hold the top firmly in place.

Size	A	B	C	Product No.	Part No.	Pack
5"	7"	10"	5"	205800	5T-CT	1
6"	8"	12"	5-1/2"	206800	6T-CT	1
7"	9"	14"	6-1/4"	207800	7T-CT	1
8"	10"	16"	7"	208800	8T-CT	1
10"	10"	20"	8-1/2"	210800	10S-CT	1


Model EZCT/S

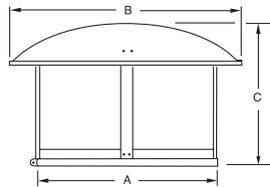

- The EZCT is a smaller profile version of CT but with no wind band or lower skirt.
- Includes spark arrestor screen.
- Twist-lock connection.

Size	A	B	C	Product No.	Part No.	Pack
10"	12"	16"	10"	210804	10S-EZCTS	1

SPARK ARRESTORS




5", 10"

- The Spark Arrestor is a diamond mesh stainless steel screen that can be field installed on our CT round tops.

Size	Product No.	Part No.	Pack
5"	205790	5T-SA	1
10"	210790	10T-SA	1

UNIVERSAL SPARK ARRESTORS



6" - 8"

- The Universal Spark Arrestor is a diamond mesh stainless steel and comes preformed for easier installation.


Size	Product No.	Part No.	Pack
6"	206791	6T-USA	1
7"	207791	7T-USA	1
8"	208791	8T-USA	1

Rain Caps/Storm Collar *continued*

- The Storm Collar is designed to fit on the round chimney pipe just above the roof flashing.
- The upper edge of the Storm Collar should be waterproofed with non-hardening silicone caulking to prevent any water from leaking between the Storm Collar and chimney pipe.
- Part is tightened with screws or tabs after positioning.

Size	A	Product No.	Part No.	Pack
5"	7"	205812	5T-SC	6
6"	8"	206812	6T-SC	6
7"	9"	207812	7T-SC	6
8"	10"	208812	8T-SC	6
10"	12"	210810	10S-SC	1


STORM COLLAR

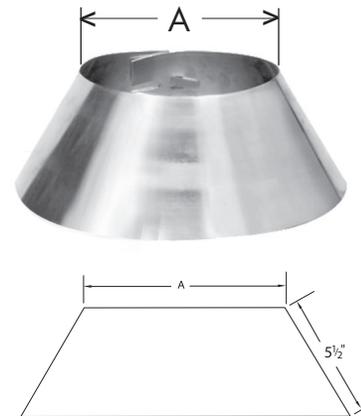

- Designed to address chimneys with downdraft issues.
- Diverts wind and rain to ensure flue gases are directed outward efficiently & effectively.
- Constructed of 300 Series Stainless Steel for strength & durability.
- Available in 5", 6", 7", 8", and 10" Diameters
- 5"- 8" diameters listed & approved to UL 103HT


Size	A	B	C	Product No.	Part No.	Pack
5"	17-1/4"	6"	4-3/4"	195802	5DK	1
6"	19-1/4"	7"	5-3/4"	196802	6DK	1
7"	19-1/4"	8"	6-3/4"	197802	7DK	1
8"	19-1/4"	9"	7-3/4"	198802	8DK	1
10"	19-1/4"	11"	9-3/4"	1910802	10DK	1

DIKAPT CHIMNEY CAP

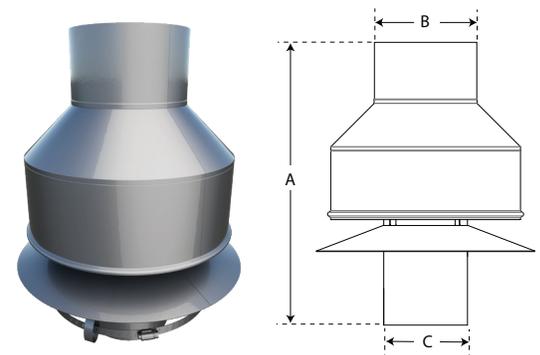

Flashings

ROOF FLASHING SELECTION CHART

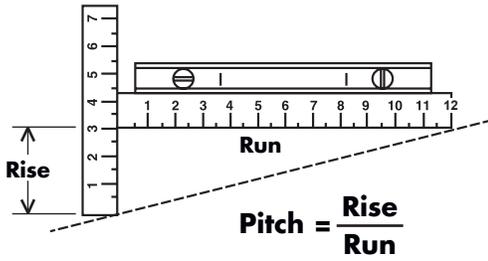


Flashings are used to seal the opening where the chimney penetrates the roof to divert rain and snow down from the roof and away from the chimney system.

A series of adjustable flashings are available depending on your roof pitch. A flat and low pitch flashing is used to seal flat and low pitch roof (up to 2/12 pitch) openings.

To determine your roof pitch, measure the number of inches from the end of a level 12" ruler down to the roof. This is the rise for 12 inches of run. A rise of 5 inches is a 5/12 pitch. . .4 inches, a 4/12 pitch, etc.


FLAT AND LOW PITCH FLASHING (0 TO 2/12 PITCH)

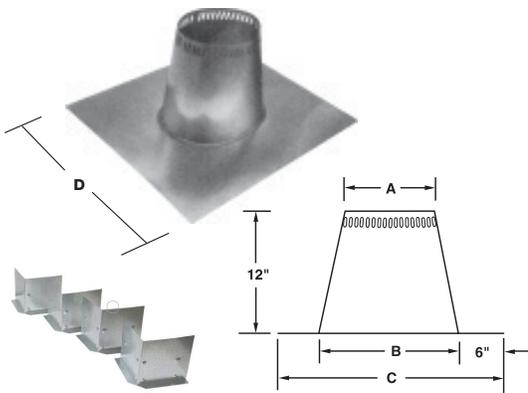

Note: *All TF flashings come with a roof shield set.

Size	A	B	C	D	Product No.	Part No.	Pack
6"	8-1/8"	12"	24-3/4"	21"	206815	6T-TF	1
7"	9-1/8"	15-3/4"	27-3/4"	24"	207815	7T-TF	1
8"	10-1/8"	15-3/4"	27-3/4"	24"	208815	8T-TF	1
10"	12-1/8"	17-3/4"	29-3/4"	29-3/4"	210815	10S-TF	1

ADJUSTABLE FLASHING SAFETY VENTS ON ALL FLASHINGS

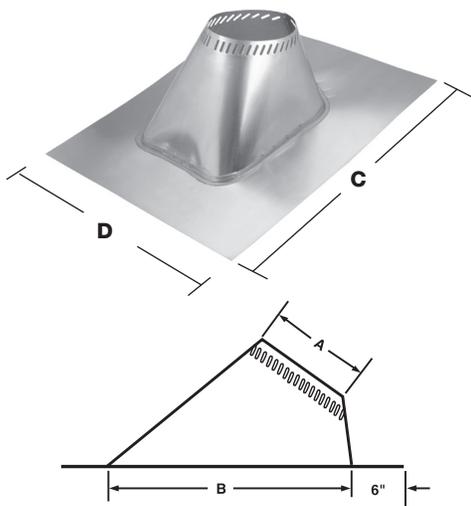

Note: *For 5 inch chimney use 6 inch Selkirk® Flashing with 5 inch storm collar. All Flashings have .025 Aluminum Bases.

2/12 To 6/12 Pitch

Size	A	B	C	D	Product No.	Part No.	Pack
6"	8-1/8"	16-1/2"	28-1/2"	24"	206825	6TAF-6	1
7"	9-1/8"	16-1/2"	28-1/2"	24"	207825	7TAF-6	1
8"	10-1/8"	19-7/8"	31-7/8"	27"	208825	8TAF-6	1
10"	12-1/8"	19-7/8"	31-7/8"	27"	210825	10SAF-6	1

6/12 To 12/12 Pitch

Size	A	B	C	D	Product No.	Part No.	Pack
6"	8-1/8"	19-7/8"	31-7/8"	27"	206830	6TAF-12	1
7"	9-1/8"	19-7/8"	31-7/8"	27"	207830	7TAF-12	1
8"	10-1/8"	19-7/8"	31-7/8"	27"	208830	8TAF-12	1
10"	12-1/8"	25-1/2"	37-1/2"	31-1/2"	210830	10SAF-12	1

Flashings *continued*

12/12 To 24/12 Pitch

Size	A	B	C	D	Product No.	Part No.	Pack
6"	8-1/8"	28-3/4"	40-3/4"	24"	206835	6TAF-24	1
7"	9-1/8"	31-1/4"	43-1/2"	24"	207835	7TAF-24	1
8"	10-1/8"	33-3/8"	45-3/8"	24"	208835	8TAF-24	1

24/12 To 36/12 Pitch

Size	A	B	C	D	Product No.	Part No.	Pack
6"	8-1/8"	41-1/4"	53-1/4"	24"	206840	6TAF-36	1
7"	9-1/8"	44-1/8"	56-1/2"	24"	207840	7TAF-36	1
8"	10-1/8"	47-3/4"	59-3/4"	24"	208840	8TAF-36	1

Size	A	B	C	D	Product No.	Part No.	Pack
6"	8-1/8"	16-1/2"	30"	33"	206845	6TAF6D	1
7"	9-1/8"	16-1/2"	30"	33"	207845	7TAF6D	1
8"	10-1/8"	19-7/8"	30"	33"	208845	8TAF6D	1

Note: Dead Soft Aluminum base is designed to be molded to uneven roof surfaces.

Dead Soft Flashing for 6/12 to 12/12

Size	Product No.	Part No.	Pack
6"	206850	6T-AF12D	1
7"	207850	7T-AF12D	1
8"	208850	8T-AF12D	1

Product No.	Part No.	Description	Pack
200275	URBAK	for 5"-8" diameter chimney	1


Note: Used for installations on corrugated roofs flat to 12/12 (10/12 for 8") pitch. Kit includes rubber boot (23-4/5" x 21-1/2"), spacers kit, special storm collar, shield, and mounting screws.

- Kit consists of sealer tape and 2 sheet metal strips which can be field shaped to match the roof profile
- Use in conjunction with a standard Selkirk Flashing to seal the opening when penetrating a corrugated metal roof
- Flashing sold separately, see pages 22 - 23

Product No.	Part No.	Pack
200280	URFK	1

Note: Used in conjunction with a standard Selkirk Flashing to seal the opening when penetrating a corrugated metal roof. **Flashing sold separately.**

ADJUSTABLE FLASHING CONTINUED SAFETY VENTS ON ALL FLASHINGS

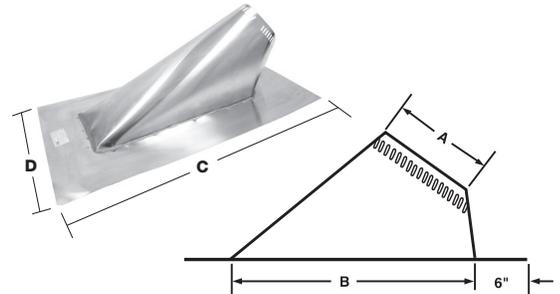

Note: For 5 inch chimney use 6 inch Selkirk® Flashing with 5 inch storm collar. All Flashings have .025 Aluminum Bases.


DEAD SOFT FLASHING 2/12 TO 6/12 PITCH



UNIVERSAL RUBBER BOOT FLASHING KIT FITS UP TO 12/12 PITCH




UNIVERSAL METAL FLASHING KIT

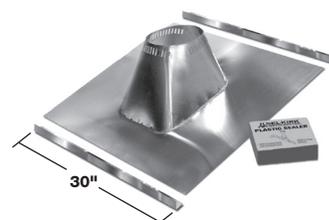

Shields


ADJUSTABLE ATTIC INSULATION SHIELD

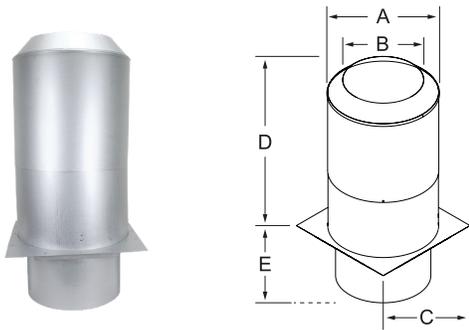

Note: *Add SUSI to this part for increased performance and safety. (See pg 25)
 *4" Adjustable Attic Insulation Shield (not exactly as shown) is used together with the Firestop Joist Shield or Ceiling Support.

- The Adjustable Attic Insulation Shield with Dropdown must be installed where the chimney enters the attic space in any installation.
- Designed to keep insulation away from the chimney and to maintain the mandatory 2" clearance to combustibles.
- Adjustable from 12" to 22".
- Drop down shield protects joist area.

Size	A	B	C	D	E	Product No.	Part No.	Pack
5"	11-7/16"	7-3/16"	13"	12" to 22"	8-1/2"	205492	5T-AAIS	1
6"	12-7/16"	8-3/16"	14"	12" to 22"	8-1/2"	206492	6T-AAIS	1
7"	13-7/16"	9-3/16"	15"	12" to 22"	8-1/2"	207492	7T-AAIS	1
8"	14-7/16"	10-3/16"	16"	12" to 22"	8-1/2"	208492	8T-AAIS	1
10"	16-7/16"	12-3/16"	18"	12" to 22"	8-1/2"	210492	10T-AAIS	1

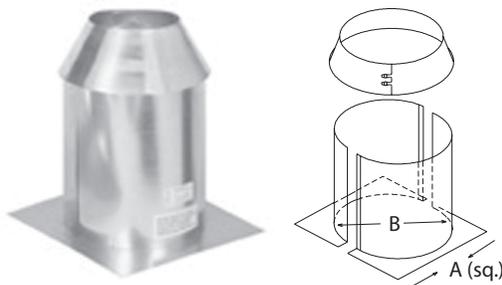


Note: *Add SUSI to this part for increased performance and safety. (See pg 25)
 *4" Adjustable Attic Insulation Shield (not exactly as shown) is used together with the Firestop Joist Shield or Ceiling Support.

- 2-piece design with Storm Collar
- The RAIS is used for retro-fit installations.
- Easy to install on existing applications without dismantling chimney.

Size	A	B	Product No.	Part No.	Pack
5"	16" x 16"	11"	205491	5T-RAIS	1
6"	16" x 16"	12"	206491	6T-RAIS	1
7"	16" x 16"	13"	207491	7T-RAIS	1
8"	16" x 16"	14"	208491	8T-RAIS	1
10"	18" x 18"	16"	210491	10T-RAIS	1

INSULATED WALL THIMBLE

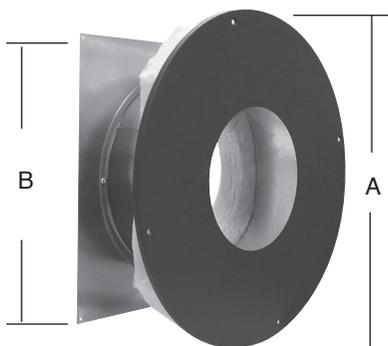

Note: *Add SUSI to this part for increased performance and safety.

- The Insulated Wall Thimble installs quickly and eliminates the need for using individual firestops. The round shielding acts as a radiation shield and provides the required 2" (air space) clearance to combustibles.
- The two sections telescope to accommodate 6" to 11" wall thickness.
- Interior wall plate painted black.


Size	Opening Required	Product No.	Part No.	Pack
5"	11-1/8" x 11-1/8"	205463	5T-IWT	1
6"	12-1/8" x 12-1/8"	206463	6T-IWT	1
7"	13-1/8" x 13-1/8"	207463	7T-IWT	1
8"	14-1/8" x 14-1/8"	208463	8T-IWT	1
10"	16-1/8" x 16-1/8"	210463	10S-IWT	1

Shields continued

- Used in floor/ceiling penetrations other than those which include a ceiling support.
- Not required when passing through roof.

Size	A	B	C	Product No.	Part No.	Pack
5"	13"	9"	7-1/8"	205465	5TJS	1
6"	14"	10"	8-1/8"	206465	6TJS	1
7"	15"	11"	9-1/8"	207465	7TJS	1
8"	16"	12"	10-1/8"	208465	8TJS	1
10"	18"	14"	12-1/8"	210465	10SJS	1


FIRESTOP JOIST SHIELD (RADIATION DUST SHIELD)

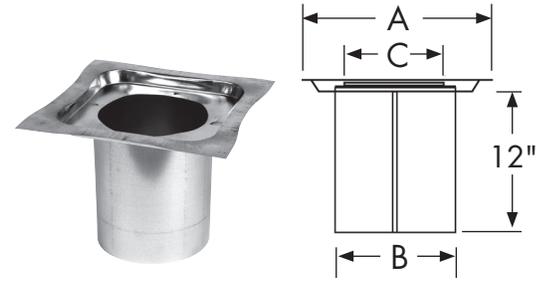

- Optional insulation for use with the Support Box, Attic Insulation Shield and Insulated Wall Thimble.
- The SUSI protects building materials against radiant heat from the chimney and helps maintain temperatures within the chimney system.
- The SUSI also reduces air infiltration into the dwelling.
- The only insulation approved for use with the Selkirk Chimney System.

Product No.	Part No.	Pack
200001	SUSI	1


SUSI (SELKIRK UNIVERSAL SHIELDING INSULATION)

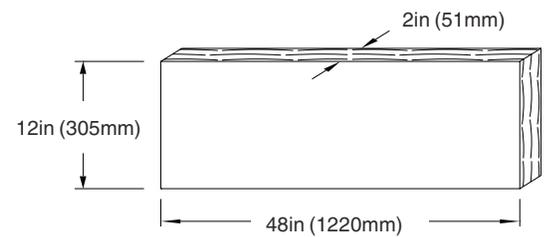

Dripless Stove Pipe Adapters

Dripless Stove Pipe Adapters are used to connect single wall stove pipe to Ultra-Temp or Galva-Temp Systems. Dripless Stove Pipe Adapters are designed to slip inside single wall stove pipe to contain any creosote dripping down the chimney to inside the stove pipe. There are two Dripless Stove Pipe Adapters:

DRIPLESS STOVE PIPE ADAPTER WITH COUPLER (DSAC)

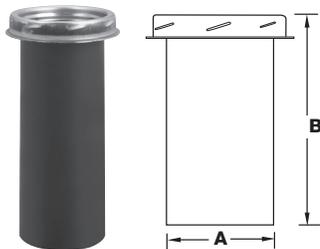


For use in new installations, this part can be installed by twist-locking the coupler on the DSAC into the first section of Ultra-Temp or Galva-Temp Type HT chimney pipe.

Size	A	B	Product Code	Part No.	Pack
6"	5-15/16"	15-3/4"	206240	6T-DSAC	1
7"	6-15/16"	15-3/4"	207240	7T-DSAC	1
8"	7-15/16"	15-3/4"	208240	8T-DSAC	1

Note: DSAC is 430 Stainless Steel.

DRIPLESS STOVE PIPE ADAPTER (DSA)

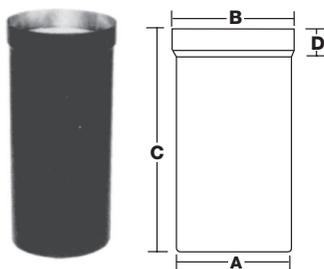

For use in retrofit installations, this part can be installed from below a Finish Support Package or Support Box and secured with screws.

Size	A	B	C	D	Product Code	Part No.	Pack
6"	5-15/16"	6-7/32"	15-3/4"	1-5/8"	206242	6T-DSA	1
7"	6-15/16"	7-7/32"	15-3/4"	1-5/8"	207242	7T-DSA	1
8"	7-15/16"	8-7/32"	15-3/4"	1-5/8"	208242	8T-DSA	1

Note: DSA is 304 Stainless Steel.


CHIMNEY PIPE ADAPTER



The Chimney Pipe Adapter is used to connect Ultra-Temp or Galva-Temp to either Double Wall or Single Wall Stove Pipe. The 6", 7" and 8" CPAs provide proper connection to Selkirk's Double Wall Stove Pipe Models USP and DSP. Finishing Band and Finishing Collar available.

Size	A	Product Code	Part No.	Pack
5"	4-15/16"	205240	5T-CPA	1
6"	5-15/16"	256240	6T-CPA	1
7"	6-15/16"	257240	7T-CPA	1
8"	7-15/16"	258240	8T-CPA	1
10"	9-15/16"	210240	10S-CPA	1

DS-AA

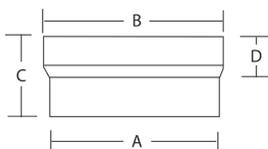

- For use in retrofit installations when using Double Wall Stove Pipe
- The DS-AA can be installed from below a Finish Support Package or Support Box
- Secure with screws

Size	A	B	C	D	Product Code	Part No.	Pack
6"	5-15/16"	6-7/32"	3"	1-1/2"	256245	6DS-AA	1
8"	7-15/16"	8-7/32"	3"	1-1/2"	258245	8DS-AA	1


Note: DS-AA is 430 stainless steel.

Accessories

- The Wall Band is used along the wall to provide for 2 inch clearance and assure stability.
- Required at 8 foot or closer intervals above the tee to stabilize the chimney.
- Stainless steel construction.

Size	A	B	Product Code	Part No.	Pack
5"	7"	17"	205520	5T-WB	4
6"	8"	17"	206520	6T-WB	4
7"	9"	17"	207520	7T-WB	4
8"	10"	17"	208520	8T-WB	4
10"	12"	17"	210520	10S-WB	1

WALL BAND

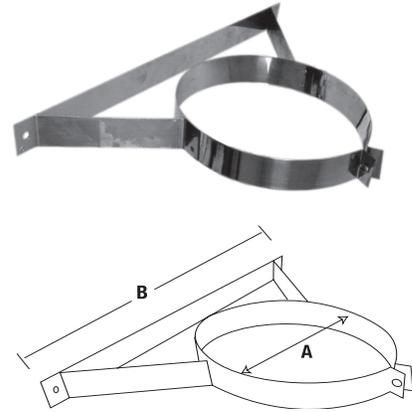

- The Universal Adjustable Wall Band is used along the wall to provide for 2 inch clearance and assure stability.
- Required at 8 foot or closer intervals above the tee to stabilize the chimney.
- Fits chimney diameters from 5" to 8".
- Allows for adjustment of 2" to 6" from a vertical wall
- 4" of horizontal adjustability

Size	Product Code	Part No.	Pack
5", 6", 7", 8"	200270	UWB	1


UNIVERSAL ADJUSTABLE WALL BAND






- Designed to deflect snow and ice while preventing unnecessary strain or damage to the chimney.
- Mounts directly above the chimney pipe with an easy panel assembly.
- Made from durable, heavy gauge galvanized steel.

Size	Product Code	Part No.	Pack
4" to 8"	2001922	USSA	1

SNOW SPLITTER

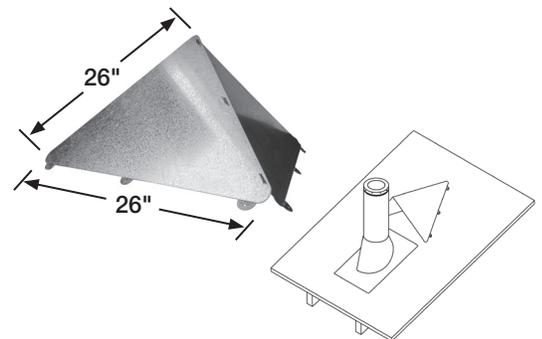


FINISHING COLLAR

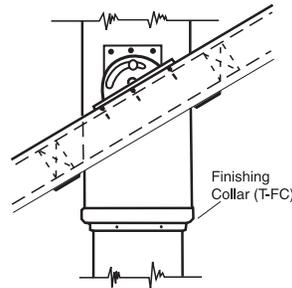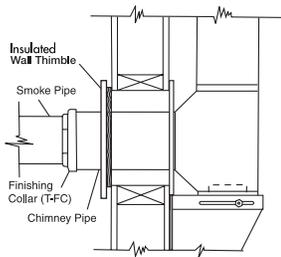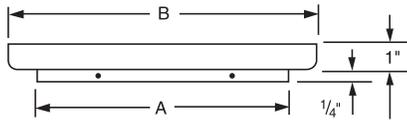

- The Finishing Collar fits over lower end of suspended insulated chimney pipe to provide finished appearance.
- Used to attach T-DSAC or T-CPA Pipe Adapters to lower end of suspended chimney or end of chimney connected to an Insulated Tee.
- Black Matte Finish.

Size	A	B	Product Code	Part No.	Pack
6"	6-1/4"	8"	206480	6T-FC	1
7"	7-1/2"	9"	207480	7T-FC	1
8"	8-1/2"	10"	208480	8T-FC	1

ADJUSTABLE PITCHED CEILING PLATE

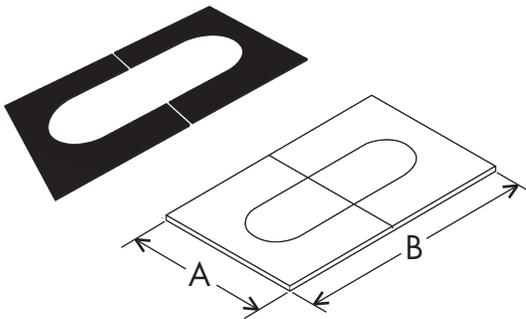

- The Pitched Ceiling Plate provides a finished appearance where the chimney passes through a sloped ceiling.
- Matte black finish.
- Adjusts to multiple ceiling pitches.
- Covers 2" air space around chimney for attractive finish.

2/12 - 6/12 Pitch

Size	A	B	Product Code	Part No.	Pack
5"	15-1/2"	18 - 29"	205512	5T-PCPAJ	1
6"	16-1/2"	19 - 30"	206512	6T-PCPAJ	1
7"	17-1/2"	20 - 31"	207512	7T-PCPAJ	1
8"	18-1/2"	21 - 33"	208512	8T-PCPAJ	1
10"	20-1/2"	23 - 37"	210512	10S-PCPAJ	1

6/12 - 12/12 PITCH



Size	A	B	Product Code	Part No.	Pack
6"	16-1/2"	19 - 30"	206514	6T-PCPAJ2	1
7"	17-1/2"	20 - 31"	207514	7T-PCPAJ2	1
8"	18-1/2"	21 - 33"	208514	8T-PCPAJ2	1
10"	20-1/2"	23 - 37"	210514	10S-PCPAJ2	1

Accessories continued

- Used to trim the ceiling, closing off the airspace around the pipe when the chimney is supported from above & extended down into the room.
- Used to trim the wall when chimney passes through a non-combustible wall.
- Used in conjunction with the Firestop/Joist Shield.
- Black Matte Finish.

Size	A	B	C	Product Code	Part No.	Pack
5"	17"	11"	7-1/8"	205488	5T-TPS	1
6"	19"	12"	8-1/8"	206488	6T-TPS	1
7"	21"	13"	9-1/8"	207488	7T-TPS	1
8"	22"	14"	10-1/8"	208488	8T-TPS	1


TRIM PLATE SPACER




4" Diameter MODEL HT Chimney

- Stainless Steel Insulated Chimney
- Model HT is an All Fuel Chimney approved for Gas, Oil, and Wood* burning applications.
- Tested and Listed to ULC S-604 and UL103HT.
- All 300 Series Stainless Steel Constructions.
- 1" "Solid Pack" Insulation.
- Ideal for Oil Stove installations.
- Model HT requires only 2" clearance to combustibles.
- Smart Choice Lifetime Warranty.

*Approved for Wood burning applications only in the United States.

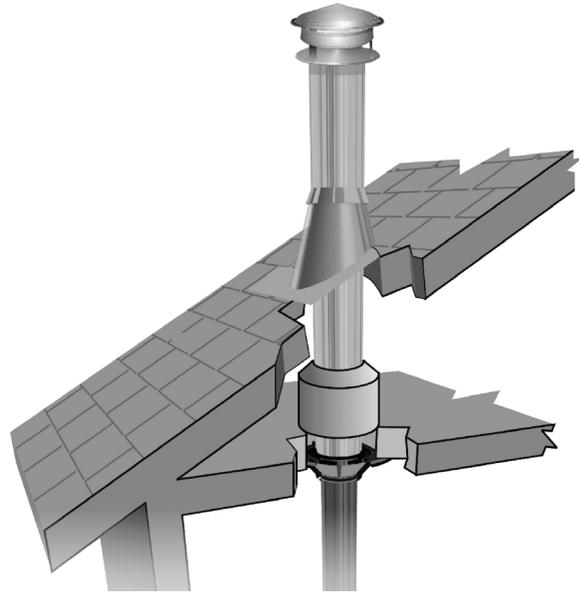

INSULATED LENGTHS ULTRA-TEMP

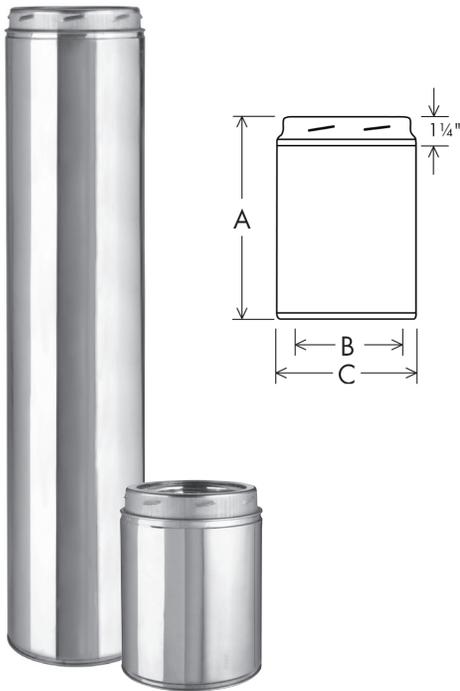

- Stainless steel inner and outer pipe.
- Secure twist-lock design couples chimney sections together with just a 1/8 turn.
- To calculate installed length, subtract 1-1/4" per joint.
- Insulated chimney requires 2" clearance to combustible material.
- All insulated pipe lengths are furnished with a securing screw.

ULTRA-TEMP - TYPE HT

Size	A	B	C	Product No.	Part No.	Pack
4"	12"	4"	6"	204012U	N/A	1
	18"	4"	6"	204018U	N/A	1
	24"	4"	6"	204024U	N/A	1
	36"	4"	6"	204036U	N/A	1


4" Diameter Type HT Continued

- 4" Elbows not sold in kits - offset support required, will support 25 feet of chimney above second elbow.

ULTRA-TEMP

Size	Degree	A	B	Product No.	Part No.	Pack
4"	15°	N/A	N/A	204206	N/A	1
4"	30°	N/A	N/A <td 204211	N/A	1	

15° AND 30° INSULATED ELBOWS

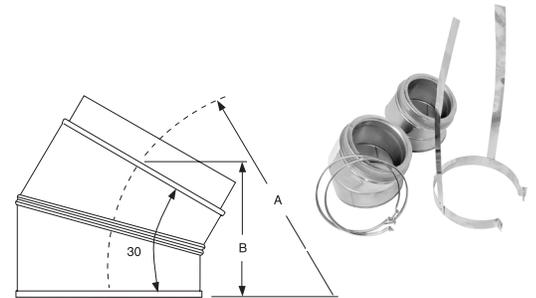


NOTE: Not exactly as shown.

- Allows the horizontal connection of the chimney to the appliance.
- Can be used on the interior or exterior of the building, in combination with a Wall Support Assembly.
- The Tee Cap provided allows access for inspection and cleaning.
- Includes securing screw.

STAINLESS INSULATED TEE WITH INSULATED TEE PLUG - TYPE HT

Size	A	B	C	Product No.	Part No.	Pack
4"	5"	5"	9"	204100	N/A	1

INSULATED TEE AND PLUG

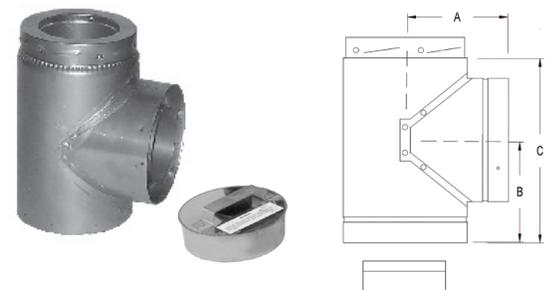


Note: Not exactly as shown

The 4" Roof Support is used only for lateral support.

ULTRA-TEMP


Size	A	B	Framing	Product No.	Part No.	Pack
4"	4"	6"	10" x 1"	HT4RS	N/A	1

ROOF SUPPORT PACKAGE

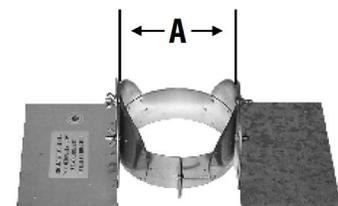

4" Diameter Type HT Continued


CEILING SUPPORT FOR 4" UT

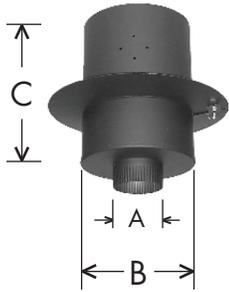

- Used to support chimney from a flat ceiling joist.
- Supports up to 50' of chimney.
- Round design with decorative black hi-temp paint finish.

Size	A	B	C	Product Code	Pack
4"	4"	9"	12"	HT4BCS	1

ANCHOR PLATE

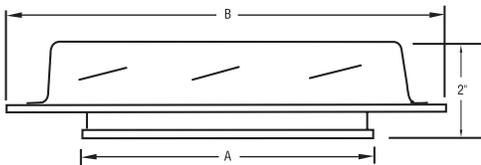

Note: 4" Anchor Plate not exactly as shown.


- The Anchor Plate provides a secure attachment for the chimney to smoke chamber outlet on masonry fireplaces, reducing footing loads and speeding construction.
- The Anchor Plate can be used for adapting the UT Chimney to a "Listed" Factory-Built fireplace certified for use with model UT. Follow the installation instructions accompanying the fireplace.
- Stainless steel and heavy gauge steel construction for long life.
- Retains chimney with a twist-lock connection.
- Supports up to 50'.

A	B	Product No.	Part No.	Pack
4"	8"	HT4AP	N/A	1

ROUND TOP RAIN CAP



4"

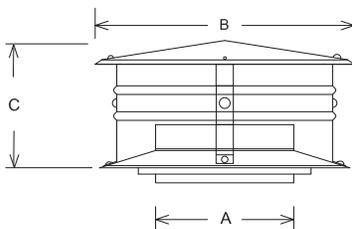

- Part of the chimney system roof assembly, the Round Top is designed with a dome to exclude rain and leaves and a lower skirt to deflect wind for proper chimney draft.
- The 4" Round Top twist-locks onto the top section of chimney.


Size	A	B	C	Product No.	Part No.	Pack
4"	4"	11"	7-1/2"	HT4RC	N/A	1

4" Diameter Type HT Continued

- The Storm Collar is designed to fit on the round chimney pipe just above the roof flashing.
- The upper edge of the Storm Collar should be waterproofed with non-hardening silicone caulking to prevent any water from leaking between the Storm Collar and chimney pipe.
- Part is tightened with screws or tabs after positioning.

Size	A	Product No.	Part No.	Pack
4"	6"	HT4SC	N/A	

STORM COLLAR

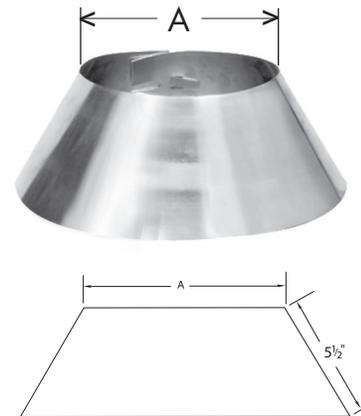

Note: 4" Storm Collar not exactly as shown.


2/12 To 6/12 Pitch

Size	A	B	C	D	Product No.	Part No.	Pack
4"	6-1/4"	N/A	20"	20"	HT4ARF	N/A	1

6/12 To 12/12 Pitch

Size	A	B	C	D	Product No.	Part No.	Pack
4"	6-1/4"	N/A	22"	22"	HT4SRF	N/A	1


ADJUSTABLE FLASHING

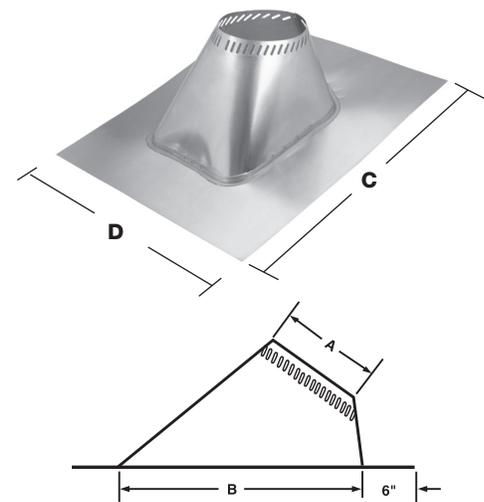

Note: *4" ARF and SRF not exactly as shown.

4" Diameter Type HT Continued

CHIMNEY PIPE ADAPTER




Note: -4" PA not exactly as shown.

The Chimney Pipe Adapter is used to connect Ultra-Temp or Galva-Temp to either Double Wall or Single Wall Stove Pipe. Finishing bands are available.

Size	A	Product Code	Part No.	Pack
4"	3-15/16"	HT4PA	N/A	1

WALL BAND

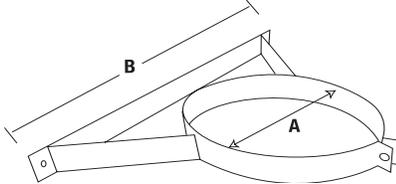


Note: 4" WB not exactly as shown.

- The Wall Band is used along the wall to provide for 2 inch clearance and to stabilize the chimney against an outside wall.
- Stainless steel construction.
- Must be installed just above the Tee and every 6' thereafter.

Size	A	B	Product Code	Part No.	Pack
4"	6"	14"	HT4WB	N/A	4

WALL SUPPORT

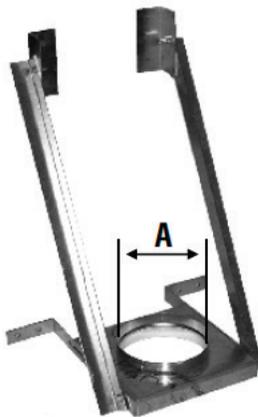

- Used to stabilize the chimney against an outside wall.
- Supports up to 50' of chimney.

Size	A	Product Code	Part No.	Pack
4"	5 1/2"	HT4WS	N/A	

4" Diameter Type HT Continued

The Attic Insulation Shield is used wherever the chimney enters an open attic. A drop-down Joist Shield is included for use when the chimney is enclosed below the ceiling. Refer to instructions for full details. The Attic Insulation Shield acts as an insulation shield to keep blown in or blanket insulation from filling in any framed opening or contacting the chimney.

Size	A	B	C	D	E	Product No.	Part No.	Pack
4"	10"	6"	N/A	12"	N/A	HT4AIS	N/A	1


- The Insulated Wall Thimble installs quickly and eliminates the need for using individual firestops. The round shielding acts as a radiation shield and provides the required 2" (air space) clearance to combustibles.
- The two sections telescope to accommodate 6" to 11" wall thickness.
- Interior wall plate painted black.

Size	Opening Required	Product No.	Part No.	Pack
4"	10-1/8" x 10-1/8"	HT4WRS	N/A	1

- Used in floor/ceiling penetrations other than those which include a ceiling support.
- Not required when passing through roof.


Size	A	B	C	Product No.	Part No.	Pack
4"	12"	8"	6-1/8"	HT4FRS	N/A	1

ATTIC INSULATION SHIELD

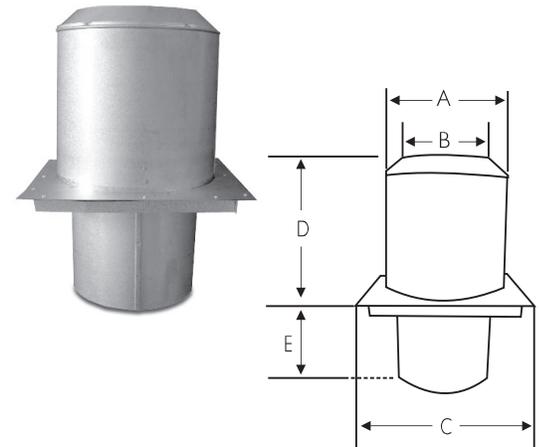


Note: *4" Attic Insulation Shield (not exactly as shown) is used together with the Firestop Joist Shield or Ceiling Support.

INSULATED WALL THIMBLE

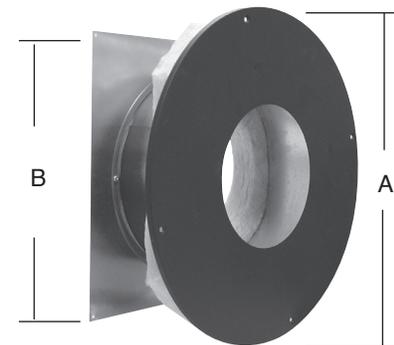

Note: *Add SUSI to this part for increased performance and safety.
*4" WRS not exactly as shown.

FIRESTOP JOIST SHIELD (RADIATION DUST SHIELD)

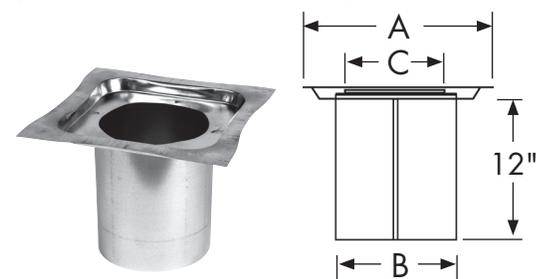

Note: 4" Firestop Radiation Shield (not exactly as shown)



BUILD FOR THE FUTURE

Our Portfolio of Brands

AirMate	www.airmate.com
AmeriFlow.....	www.ameriflowregisters.com
Amerivent.....	www.ameri-vent.com
AMPCO.....	www.ampcostacks.com
Builder's Best	www.buildersbest.com
Duravent	www.duravent.com
Hart & Cooley.....	www.hartandcooley.com
Heatfab	www.heatfab.com
Lima.....	www.limaregister.com
Milcor	www.milcorinc.com
Portals Plus.....	www.portalsplus.com
RPS.....	www.rpscurbs.com
Security Chimneys.....	www.securitychimneys.com
Selkirk.....	www.selkirkcorp.com

Corporate Headquarters

Duravent Group
28 W. Adams, Suite 1810
Detroit, MI 48226
Tel: 800.835.4429
Email: info@duraventgroup.com
www.duraventgroup.com

Contact Us

For more information about our products or to contact us directly, please go to any of our websites and click on the Contact section on the website.



duravent[™]
GROUP

BUILD FOR THE FUTURE

www.duraventgroup.com



For warranty information:
Scan this QR code or visit
www.duraventgroup.com/warranties