

Getting Started

Determine chimney diameter

Determine the (inner) diameter of your chimney. This is usually the same size (6" or 8") as the flue collar on your wood stove.



Helpful Installation Tips

Step 1

Select type of installation (See opposite page for installation types)


Step 2

Determine overall height

Determine the number of Chimney Lengths required. Chimney Lengths are available in 48", 36", 24", 18" and 12" lengths.

The chimney must extend at least 3' above the highest point where it passes through the roof surface and at least 2' higher than any part of the building within a horizontal distance of 10'.

NOTE: When calculating the installed length of your chimney, subtract 1-1/4" for each joint and include the Height Requirements as shown in this illustration.



Step 3

Determine roof pitch

Choose the proper Roof Flashing required for your installation.


To determine which Roof Flashing you require, work out the pitch of your roof.

2/12 - 6/12 Roof Pitch = (Low Slope)*
6/12 - 12/12 Roof Pitch = (Steep Slope)

*Note: Low Slope Flashing included in Flat Ceiling Kit.

Note: For Metal Roofs use Universal Rubber Boot Flashing Kit or Dead Soft Flashing.


To calculate your roof pitch, use one of the 12-inch rulers to measure the number of inches (A) from the end of the other ruler down to the roof.



Step 4

Offset calculation for ceiling support installations only

If an offset is required to avoid rafters or other obstructions, measure the horizontal distance required and the vertical height available. Refer to the Chimney Offset Chart to determine the Elbows and Chimney Length required.




Product No.	Part No.	2 Elbows w/o Pipe		2 Elbows +6" Section		2 Elbows +9" Section		2 Elbows +18" Section		2 Elbows +36" Section	
		A	B	A	B	A	B	A	B	A	B
15 Degree											
205206	5T-EL15KIT	0.78	5.8	2.3	11.7	3.0	14.6	5.0	22.0	9.9	40.0
206206	6T-EL15KIT	0.80	6.0	2.4	11.9	3.1	14.8	5.1	22.2	9.9	40.2
207206	7T-EL15KIT	0.83	6.3	2.4	12.1	3.2	15	5.2	22.5	10.0	40.4
208206	8T-EL15KIT	0.86	6.6	2.5	12.4	3.2	15.3	5.2	22.8	10.0	40.7
30 Degree											
205211	5T-EL30KIT	3.7	13.8	6.7	19.0	8.2	21.6	12.1	28.3	21.4	44.4
206211	6T-EL30KIT	3.8	14.3	6.8	19.5	8.3	22.1	12.2	28.8	21.5	44.9
207211	7T-EL30KIT	4.0	14.8	7.0	20.0	8.5	22.6	12.3	29.3	21.6	45.4
208211	8T-EL30KIT	4.1	15.3	7.1	20.5	8.6	23.1	12.5	29.8	21.8	45.9

Note: An Interior Resupport comes with each Elbow Kit


Step 5

Select stove pipe

The final step required to complete your Wood Stove Venting solution is to determine the Model DSP Double Wall Stove Pipe parts that will be needed to complete your installation. (Refer to Installation Diagrams (Step 1) and complete your Installation Planning Work Sheet.)

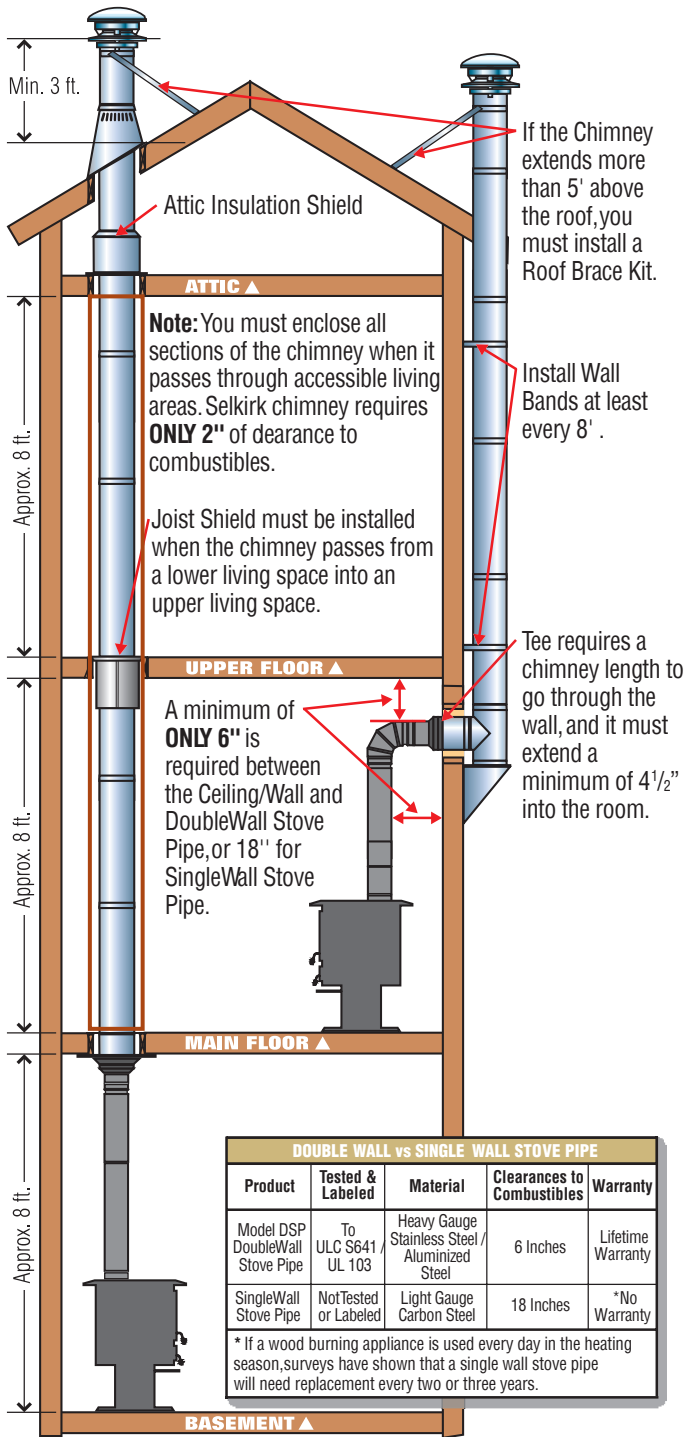

All-Fuel Chimney Installation Guide

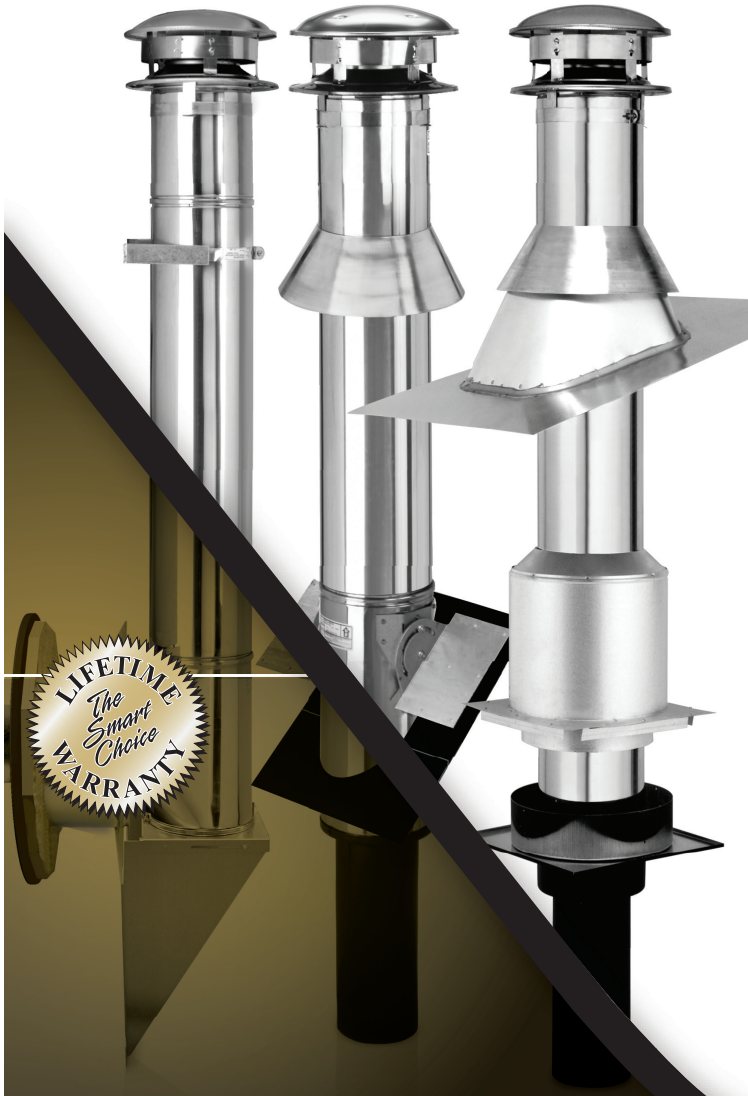

Use Double Wall Stove Pipe for Optimum System Performance

Need answers? Call 1.800.433.6341 or visit us online at www.selkirkcorp.com









Reduce, Reuse, Recycle
Our literature is printed on recyclable paper





Step 1 Select type of installation by determining where your chimney will run. (Installations may vary. Please refer to the installation instructions @ www.selkirkcorp.com)

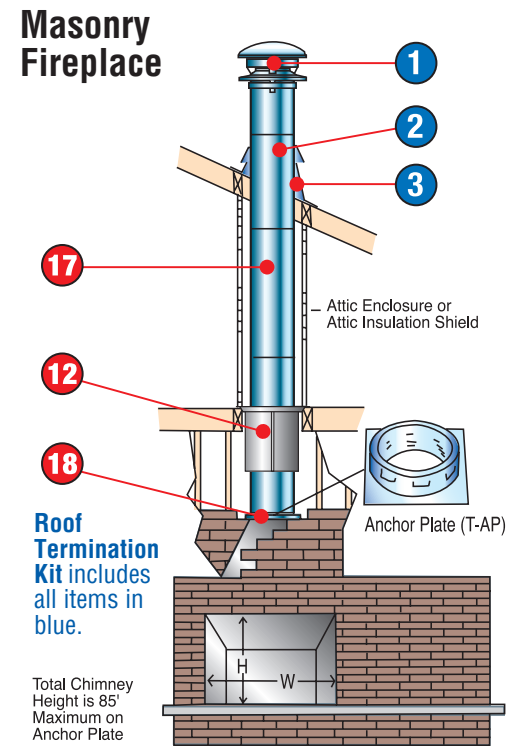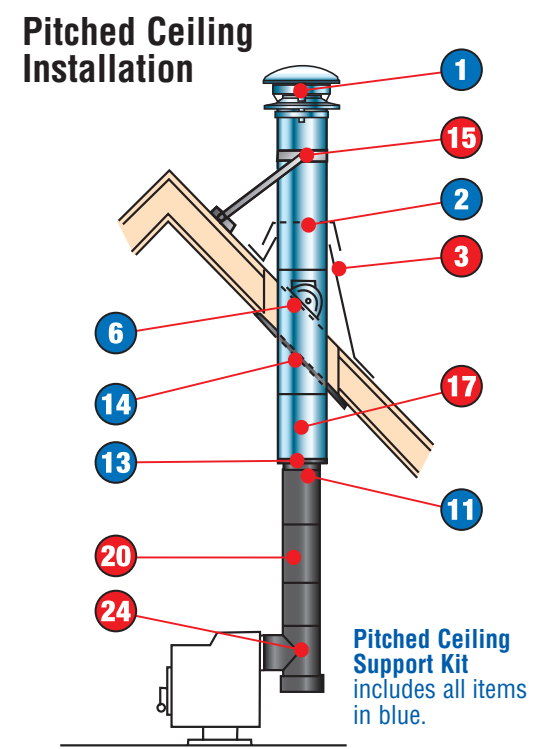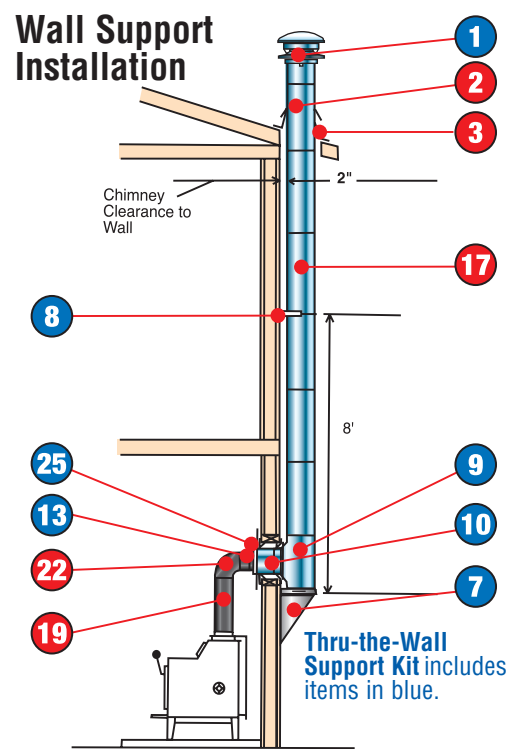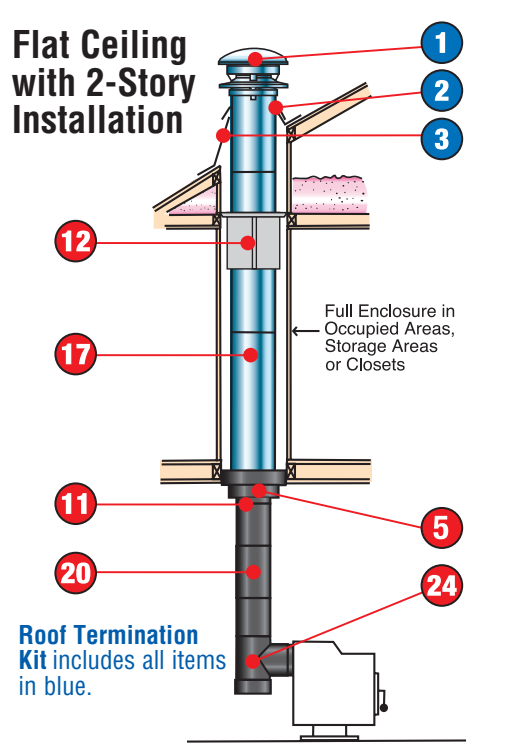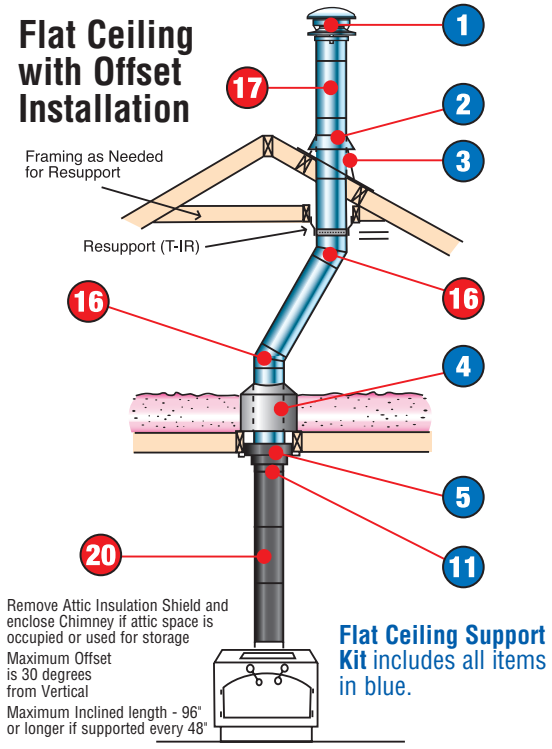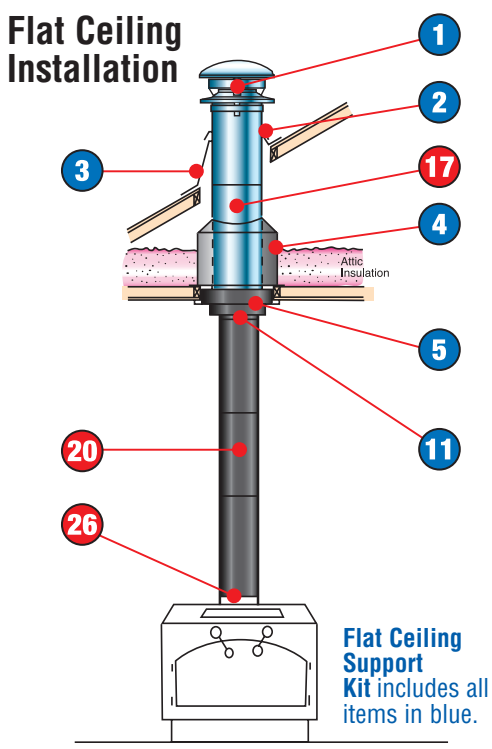

Installation Planning Worksheet		PRICE	QTY	TOTAL
SCS CHIMNEY				
Chimney Kits				
Roof Termination Kit (T-RTK) includes; 1, 2, 3 (T-AF6)		\$	X	=
Flat Ceiling Kit (T-FCK) includes; 1, 2, 3 (T-AF6), 4, 5, 11		\$	X	=
Pitched Ceiling Kit (T-PCK) includes; 1, 2, 6, 11, 13, 14		\$	X	=
Thru-the-Wall Kit (T-TWK) includes; 1, 7, 8, 9, 10, 13, 17 (T-12), 25		\$	X	=
1 Round Top (T-CT)		\$	X	=
2 Storm Collar (T-SC)		\$	X	=
3 Roof Flashing (See Step 3)				
Adjustable 2/12 to 6/12 (T-AF6)		\$	X	=
Adjustable 6/12 to 12/12 (T-AF12)		\$	X	=
Not Illustrated 4 Universal Rubber Boot Flashing Kit (T-URBAK)		\$	X	=
4 Attic Insulation Shield (T-AIS)		\$	X	=
5 Finish Ceiling Support (T-FSP)		\$	X	=
6 Roof Support Package (T-RSP) includes an 18" length of pipe		\$	X	=
7 Wall Support Kit (T-WSK)		\$	X	=
8 Wall Band (T-WB)		\$	X	=
9 Insulated Tee and Plug (T-IT)		\$	X	=
10 Insulated Wall Thimble (T-IWT)		\$	X	=
11 Stove Pipe Adapter (T-DSAC) for use with single- wall stove pipe, for DSP use 25 (DSP-CPA)		\$	X	=
12 Joist Shield (T-JS)		\$	X	=
13 Finishing Collar (T-FC)		\$	X	=
14 Adjustable Pitched Ceiling Plate (T-PCPAJ)		\$	X	=
15 If Chimney extends more than 5' above roof line				
Roof Brace Kit (T-RBK)		\$	X	=
16 If an Offset is required use an Elbow Kit. (See Step 4)				
15° Elbow Kit - kits contain 2 elbows, 2 lockbands, and 1 Interior Resupport (T-15EL)		\$	X	=
30° Elbow Kit - kits contain 2 elbows, 2 lockbands, and 1 Interior Resupport (T-30EL)		\$	X	=
17 Chimney Lengths (See Step 2)				
12" Length (T-12)		\$	X	=
18" Length (T-18)		\$	X	=
24" Length (T-24)		\$	X	=
36" Length (T-36)		\$	X	=
48" Length (T-48)		\$	X	=
18 Anchor Plate (T-AP)		\$	X	=
Not Illustrated 19 Universal Shielding Insulation (SUSI) for use with 4, or 10 To use the SUSI on a pitched ceiling, use the T-SB Support Box				
MODEL DSP DOUBLE WALL STOVE PIPE		PRICE	QTY	TOTAL
19 Vertical Installation Kit (DSP-VK)				
Includes CPA, Telescoping Length (Adjustable from 38" - 68") Finishing Band		\$	X	=
20 Smoke Pipe Lengths				
36" Length (DSP-P36)		\$	X	=
24" Length (DSP-P24)		\$	X	=
12" Length (DSP-P12)		\$	X	=
6" Length (DSP-P6)		\$	X	=
21 12" Adjustable Length (DSP-AL) adjusts from 12" - 18"		\$	X	=
22 90° Elbow (DSP- E9)		\$	X	=
23 45° Elbow (DSP- E4)		\$	X	=
24 Tee with Cap (DSP-TE)		\$	X	=
25 Chimney Pipe Adapter (DSP-CPA)		\$	X	=
26 Stove Adapter (DSP-SA)		\$	X	=
Not Illustrated 7" to 8" Outlet Adapter (DSPI78)		\$	X	=
SSTBG 09/18				
TOTAL \$				