以SELKIRK.

**CATALOG** 



**FUEL TYPE:** 

**Wood Pellet** 



**Model SuperVent 2100** 



**Double Wall Stove Pipe Model DSP** 



**Rigid & Flexible Stainless Steel Chimney Liner** 



# **Table of Contents**

About	1
Construction Features	. 2
Lengths	3
Lengths Adjustable	
Elbow 45°	
Elbow 90°	
Tee with Tee Cap	
Increaser Tee with Tee Cap	
Double Tee with Tee Cap	
Tee Cap.	
Vertical Termination Cap	
Horizontal Termination.	
Screen Cap	
Wall Band Adjustable	
Ceiling Support	
Ceiling Support/Firestop	
Cathedral Ceiling Support	
Attic Insulation Shield	8
Trim Collar	8
Firestop	8
Wall Thimble	9
Flashing Adjustable	9
Tall Cone Flashing	9
Storm Collar	. 10
3" to 4" Increaser	. 10
Appliance Adapter	. 10
Masonry Adapter	. 10
Flex Connector	. 11
Reverse Flex Connector	. 11
Multi-Fit Connector Increaser	. 11
Through the Wall Kit	. 12
Basement Kit	. 12
Insert Floy Kit	10

Pellet Vent is a premiere venting system designed for easy installation. Fast, sealed and secure assembly coupled with laser-welded seams and smooth joint connections create a pipe system that is sleek and beautiful. No need for silicone sealant with Pellet Vent. The gasket design seals the pipe tight, eliminating the need for silicone at the seams.

## Pellet Vent features:



- Easy to assemble
- Silicone gasket sealed
- Laser-welded seams
- Smooth joint connections
- 360° Lock-Tab secure rotation
- Lock-Tab allows for easy dismantling for inspection and cleaning
- 300 Series stainless steel inner, galvalume outer
- Complete offering of painted pipe, fittings, and components
- 1" Clearance to combustibles



The Pellet Vent's inner pipe is made of 300 series stainless steel which provides exceptional corrosion resistance. The outer pipe is manufactured with galvalume steel, for superior protection against harsh outdoor elements.

**Gasket Technology** 

Pellet Vent's superior silicone gasket technology seals the system and eliminates fly ash from escaping. Easy to assemble. Easy to take apart for inspection and cleaning.

### **Laser-Welded Seams**

Both the inner and outer pipes are laser-welded, creating a smooth seam and consistently round pipe.

**Lock-Tab**<sup>TM</sup> **Security** 

Pellet Vent features a female end Lock-Tab system. When engaged, the Lock-Tab will securely hold pipe in place, allowing 360° rotation.

**Smooth Joint Connections** 

Our unique end forming process creates a connection joint that provides a smooth, clean profile. The gasket within the pipe seals the connection tight, providing a superior, leakfree connection.

## **Specifications and Dimensions**

Model SPV has been tested and listed by Underwriters Laboratories Inc. in accordance with:

US Standards	UL641: Type L low temperature venting systems
US Standards	UL103 (applicable portions of): The standard for residential type and building heating appliance chimneys
Canadian Standards	ULC-S609: Low temperature type L vents
Canadian Standards	ULC/ORD-C441: Other recognized document for pellet vents

US Standard for Chimneys, Fireplaces, Vents and Solid Fuel Burning Appliances, NFPA-211

Canadian Installation Code for Solid Fuel Burning Appliances and Equipment, CSA-B365

The SPV system is rated for flue temperatures up to 570°F/300°C and is backed by our Smart Choice Warranty

SPV can be touched up with Thurmalox 270 Black paint





LENGTHS			Product Code Selkirk	Description	Diameter	Length
			623001	Pipe Length 3" x 12"	3"	12"
			623003	Pipe Length 3" x 24"	3"	24"
			623004	Pipe Length 3" x 36"	3"	36"
			624000	Pipe Length 4" x 6"	4"	6"
0 11 2			624000B	Pipe Length 4" x 6", Black	4"	6"
		Ī	624001	Pipe Length 4" x 12"	4"	12"
			624001B	Pipe Length 4" x 12", Black	4"	12"
		LENGTH	624002	Pipe Length 4" x 18"	4"	18"
			624002B	Pipe Length 4" x 18", Black	4"	18"
			624003	Pipe Length 4" x 24"	4"	24"
			624003B	Pipe Length 4" x 24", Black	4"	24"
			624004	Pipe Length 4" x 36"	4"	36"
			624004B	Pipe Length 4" x 36", Black	4"	36"
			624005	Pipe Length 4" x 60"	4"	60"
			624005B	Pipe Length 4" x 60", Black	4"	60"

## Lengths

- $\bullet$  Available in lengths of 6", 12", 18",  $\,$  24", 36" and 60"  $\,$
- 1 ¾" overlap at joints



Product Code Selkirk	Description	Diameter	Length
623007	Pipe Adjustable 3" x 12"	3"	Adj. 12"
624007	Pipe Adjustable 4" x 12"	4"	Adj. 12"
624007B	Pipe Adjustable 4" x 12", Black	4"	Adj. 12"


## Adjustable Lengths

- Adjustable up to 9-1/4" by simply sliding an SPV Length over it
- Can be used on any components, vertically or horizontally



#### **Product Code ELBOWS** Description Diameter Selkirk 624008 Elbow 4" x 45 Degree 4" -5 3/4"— Elbow 4" x 45 Degree, Black 624008B






## 45° Elbow

- Used as an offset around obstructions
- Can be used as a termination when accompanied by a Screen Cap





Product Code Selkirk	Description	Diameter
623006	Elbow 3" x 90 Degree	3"
624006	Elbow 4" x 90 Degree	4"
624006B	Elbow 4" x 90 Degree, Black	4"

## 90° Elbow

• Used as an offset around an obstruction

TEE COMPONENTS	
Tee with Tee Cap	11 1/4"

## T


- Used to transition from horizontal to vertical orientation
- Provides easy access for inspection and maintenance
- Includes Tee Cap

Product Code Selkirk	Description	Diameter
623009	Tee & Cap 3" x 3" x 3"	3"
624009	Tee & Cap 4" x 4" x 4"	4"
624009B	Tee & Cap 4" x 4" x 4", Black	4"
623022	Tee & Cap w/Appliance Adapter 3" x 3" x 3"	3"
623022B	Tee & Cap w/Appliance Adapter 3" x 3", Black	3"
624022	Tee & Cap w/Appliance Adapter 4" x 4" x 4"	4"
624022B	Tee & Cap w/Appliance Adapter 4" x 4" x 4", Black	4"



## TEE COMPONENTS (CONTINUED)






Product Code Selkirk	Description	Diameter
623023	Increaser Tee & Cap 3" x 4" x 4"	3"
623023B	Increaser Tee & Cap 3" x 4" x 4", Black	3"

## Increaser Tee with Tee Cap

- Used to transition from horizontal to vertical orientation
- Converts a 3" appliance to a 4" SPV system
- Provides easy access for inspection and maintenance
- Includes Tee Cap




Product Code Selkirk	Description	Diameter
624018	Pellet Double Tee & Caps	4"
624018B	Pellet Double Tee & Caps, Black	4"

## Double Tee with Tee Caps

- Used to transition from horizontal to vertical orientation
- Allows horizontal or vertical cleaning access and inspection
- Includes two Tee Caps





Product Code Selkirk	Description	Diameter
624016	Pellet Tee Cap	4"
624016B	Pellet Tee Cap, Black	4"


## Tee Cap

• Use as a replacement Tee Cap



# TERMINATIONSProduct Code SelkirkDescriptionDiameter623014Vertical Cap 3"3"624014Vertical Cap 4"4"






## **Vertical Termination Cap**

- Vent termination for a vertical, through-the-roof installation
- Designed to prevent rain and snow from entering the vent





Product Code Selkirk	Description	Diameter
623020	Horizontal Cap 3"	3"
624020	Horizontal Cap 4"	4"

## **Horizontal Termination**

• Vent termination for a horizontal through-the-wall installation





Product Code Selkirk	Description	Diameter
624034	Screen cap for 45 Deg 4"	4"

## Screen Cap

• Must be used in conjunction with a 45° Elbow to serve as a horizontal termination

WALL BAND		Product Code Selkirk	Description	Diameter
0 12 20	ADJ 1-3"	624019	Adjustable Wall Band	4"

## Adjustable Wall band

• Stabilize and suppport a vertical or horizontal run of pipe

1.888.735.5475

• Clearance distance adjustable from 1" to 3"



CEILING SUPPORT

Product Code Selkirk

Description

Diameter

624012

Ceiling Support 4", Black

4"




• Used to support SPV from below the ceiling joist

10 1/4"

10 3/4"


- Maintains 1" clearance to combustibles
- Trim plate is painted black



Product Code Selkirk	Description	Diameter
624047	Ceiling Support/Firestop	4"

## **Ceiling Support/Firestop**

- Used to support SPV from above the ceiling joist
- Maintains 1" clearance to combustibles

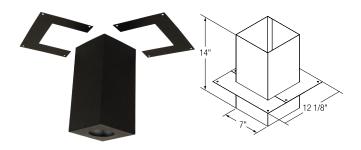

Product Code Selkirk	Description	Diameter
624031	Cathedral Ceiling Support	4"

## **Cathedral Ceiling Support**


- Used to support SPV in a cathedral or sloped ceiling installation
- Maintains clearance to combustibles
- Painted black



## **Product Code SHIELDS** Description Diameter Selkirk 623010 Attic Insulation Shield 3" 3" 624010 Attic Insulation Shield 4" 4" ADJ 12 1/2"-23 1/2"

## **Attic Insulation Shield**

- Used in the attic to guard against the hazard of blown-in or blanket insulation
- Maintains a 1" clearance to combustibles
- Adjust up to 23 ½"
- Includes a drop-down joist shield to protect the joist area

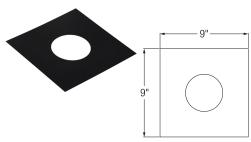

Product Code Selkirk	Description	Diameter
624032	Trim Plate 4", Black	4"

## **Trim Collar**

- Finishing plate used at the ceiling level or on a sidewall
- Maintains clearance to combustibles
- Painted black


FIRESTOP		Product Code Selkirk	Description	Diameter
		623011	Firestop 3"	3"
	9"	624011	Firestop 4"	4"
	9"			
Firestop	<u>*                                    </u>			

- Used to protect combustible materials where SPV passes through a ceiling
- Can also be used at the soffit level in an exterior installation



# WALL THIMBLEProduct Code SelkirkDescriptionDiameter623013Wall Thimble 3", Black3"ADJ 4 1/2"-8 1/2"624013Wall Thimble 4", Black4"





Wal	11 '	Γhi	m	hle	3


- Used in a combustible through-the-wall installation
- Maintains clearance to combustibles
- Adjustable for 4 ½" to 8 ½" thick walls
- Painted black

FLASHINGS		Product Code Selkirk	Description	Diameter
		623036	Adjustable Flashing 6/12-12/12"	3"
		624035	Adjustable Flashing 1/12-6/12"	4"
	5 1/8" 4"	624036	Adjustable Flashing 6/12-12/12"	4"

## Adjustable Flashing

• Weatherproof the installation through a pitched roof





Product Code Selkirk	Description	Diameter
624015	Tall Cone Flashing 0/12-1/12"	4"


## **Tall Cone Flashing**

• Weatherproof the installation through a flat roof



# STORM COLLARProduct Code SelkirkDescriptionDiameter623021Storm Collar 3"3"624021Storm Collar 4"4"






**Storm Collar** 

- Maintain a weather tight seal between the vent and the roof flashing
- Silicone must be applied (not included)

ADAPTERS		Product Code Selkirk	Description	Diameter
		623025	Increaser 3"-4"	3" to 4"
		623025B	Increaser 3"-4", Black	3" to 4"
	7 3/4"			
)				
3" to 4" Increaser	<u> </u>			

• Transition from a 3" to a 4" SPV





Product Code Selkirk	Description	Diameter
623017	Appliance Adapter 3"	3"
624017	Appliance Adapter 4"	4"

## **Appliance Adapter**

• Attach to the appliance for connection to SPV





Masonry	Ad	lapter	•

• Adapt SPV to a masonry chimney

Product Code Selkirk	Description	Diameter
624033	Masonry Adapter 4"	4"



ADAPTERS (CONTINUED)


Product Code Selkirk

Description

Diameter

624026 Flex Connector 4" 4"






## **Flex Connector**

• Transition from a flexible stainless steel liner to SPV






Product Code Selkirk	Description	Diameter
624027	Reverse Flex Connector 4"	4"

## **Reverse Flex Connector**

• Transition from SPV to a flexible stainless steel liner





Product Code Selkirk	Description	Diameter
624055	Multi-fit Connector Increaser/Appliance Adapter	4"


## **Multi-Fit Connector Increaser**

- 3" appliance adapter and 4" pipe increaser in a single component
- Attaches to 3" appliance collars
- Adjustable attachment from the appliance to the adapter



## **KITS**

## Through the Wall Kit



Product Co Selkirk	de Size
623044	3" Kit
624044	4" Kit


## 3" Kit Contains:

- 1 Horizontal Termination (3")
- 1 90° Elbow (3")
- 2 Adjustable Wall Band (3")
- 1 Appliance Adapter (3")
- 1 Wall Thimble (3")
- 1 Tee with Tee Cap (3")
- 5 12" Pipe Length (3")

### 4" Kit Contains:

- 1 Horizontal Termination (4")
- 1 90° Elbow (4")
- 2 Adjustable Wall Band (4")
- 1 Appliance Adapter (3")
- 1 Appliance Adapter (4")
- 1 3" to 4" Increaser
- 1 Wall Thimble (4")
- 1 Tee with Tee Cap (4")
- 5 12" Pipe Length (4")

## **Basement Kit**





Product Code Selkirk	Size
624045	4" Kit

## 4" Kit Contains:

- 1 Horizontal Termination (4")
- 1 Appliance Adapter (3")
- 1 Appliance Adapter (4")
- 1 3" to 4" Increaser
- 1 Wall Thimble (4")
- 2 Tee with Tee Cap (4")
- 3 Adjustable Wall Band (4")
- 2 90° Elbow (4")
- 2 12" Pipe Length (4")
- 4 24" Pipe Length (4")

## **Insert Flex Kit**



Product Code Selkirk	Size
624042	25' Kit
624043	35' Kit

## 25' Kit Contains:

- 1 25' of 4" Stainless Flex
- 1 Increaser Tee w/Tee Cap (4")
- 1 Reverse Flex Connector (4")
- 1 4" Termination Cap
- 1 4" Flex Flashing Connector
- 1 4" Flashing/Support
- 1 Appliance Adapter 3"
- 1 Silicone Sealant

## 35' Kit Contains:

- 1 35' of 4" Stainless Flex
- 1 Increaser Tee with Tee Cap (4")
- 1 Reverse Flex Connector (4")
- 1 4" Termination Cap
- 1 4" Flex Flashing Connector
- 1 4" Flashing/Support
- 1 Appliance Adapter 3"
- 1 Silicone Sealant

## NOTES





For training, detailed product information, downloadable catalogs and installation instructions visit our website:

selkirkcorp.com



## 以SELKIRK.

**Selkirk Corporation** 5030 Corporate Exchange Blvd. Grand Rapids, MI 49512

phone: 1.800.992.VENT (8368) email: info@selkirkcorp.com

selkirkcorp.ca



## 以SELKIRK.

**Selkirk Canada Corporation** 

950 South Service Road Second Floor Stoney Creek, ON L8E 6A2

phone: 1.888.SELKIRK (735.5475) email: cscanada@selkirkcorp.com

Complete Linecard



residential chimney



roof curbs & equipment



doors



rooftop products\*



residential



filters\*



components



grilles, registers, diffusers



commercial industrial vent